

Wall-Mount Vent Hood

E36WC75GSS



Wave-Touch™ Control Panel Technology

A simple touch, anywhere on the panel, lights controls and provides access to all functions. This allows easy programming while keeping activated functions lighted for easy monitoring.




Four-Speed, Dual-Centrifugal Blower

Quietly and effectively removes the most persistent food and cooking odors at 600 CFM.



Dual Halogen Lighting

Two overhead halogen bulbs evenly illuminate the cooking surface and provide abundant light to enhance the cooking experience.



Washable Stainless Steel Filters

Saturated filters can be rinsed and cycled through the dishwasher. The stainless steel filter provides strength and durability not found in foam filters.

36" WALL-MOUNT VENT HOOD

Installation Type	Wall Mounted
-------------------	--------------

FEATURES

Intelligent Heat Sensor	Yes
Air Discharge	Vertical
Air Delivery (CFM)	600
Blower Type	Dual Centrifugal
Controls	Wave-Touch™
Fan Speeds	4
Halogen Lights	Yes
Washable Stainless Steel Filters	Yes
Exhaust Duct	Convertible*
Duct Required	6" Round

OPTIONAL ACCESSORIES

Charcoal Filter – CF40EC	Optional
Duct-Free Kit – DFKTWC75GS	Optional
Flue Extension – 35-7/16" EXWC75GS	Optional

SPECIFICATIONS


Overall Exterior Dimensions –	
Width	35-7/16"
Height (With One Cover) (With Flue Extension)	16-1/2" min. 27-3/16" min. 36" max.
Depth	19-11/16"
Voltage Rating	120V/60Hz/15A
Connected Load (kW Rating) @ 120 Volts‡	0.46
Power Supply Location (Within Flue Adjacent to Bottom of Air Outlet)	Enters Flue Top at Right
Product Weight	49 Lbs.
Shipping Weight	61 Lbs.
Sones Rating	9.5

* Ventilation is convertible to be either ducted outside, or recirculated inside requiring no ducting. (Recirculated option requires use of optional Duct-Free Kit.)

‡ For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

NOTE: Always consult local and/or national electric codes. Check local building codes for installation requirements, as they may vary per locale. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxicon.com.

Specifications subject to change.

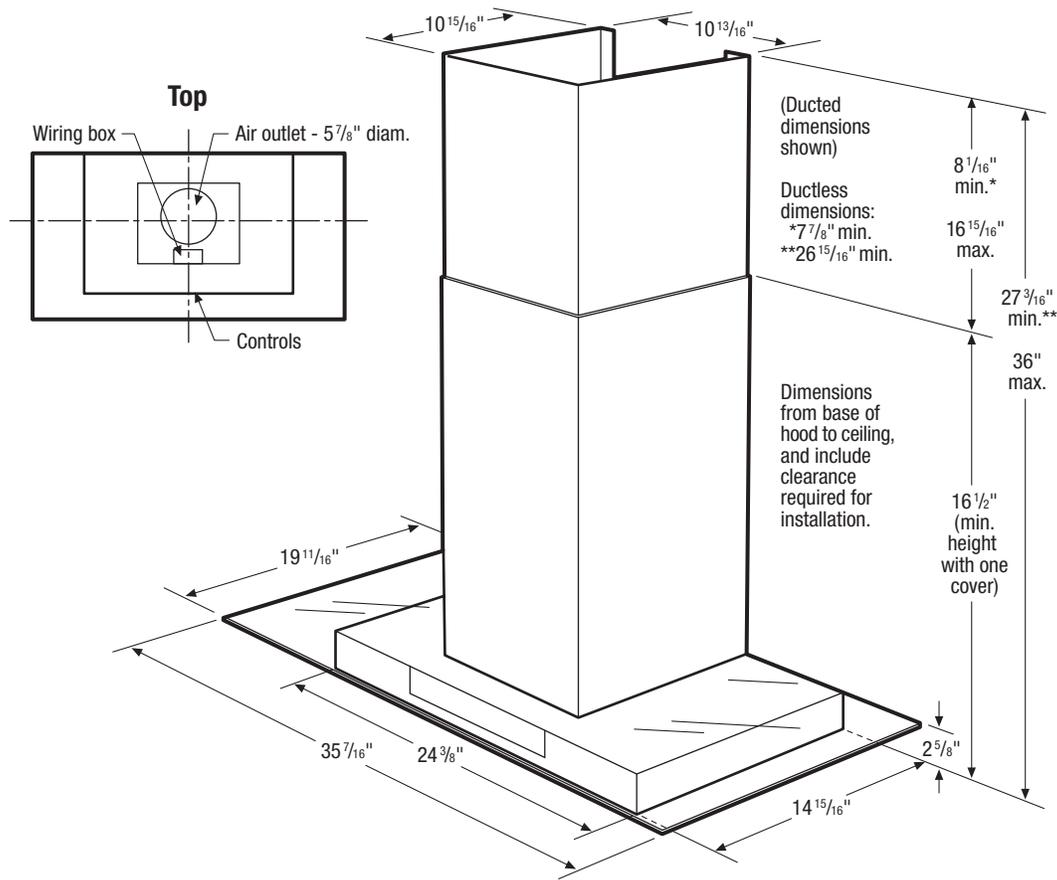

36" Wall-Mount Vent Hood Specifications

- Product Weight – 49 Lbs.
- Wall-Mount Installation
- Ventilation is convertible to be either ducted outside, or recirculated inside requiring no ducting.
- Sones Rating – 9.5
- Voltage Rating – 120V/60 Hz/15 Amps
- Connected Load (kW Rating) @ 120 Volts = 0.46kW (For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 3.93 Amps
- Always consult local and/or national electric codes. Check local building codes for installation requirements, as they may vary per locale.
- For most efficient operation, position hood low to cooktop. Recommended installation is 30" - 36" above countertop.

Ducted Option Specifications

- For outside ventilation only.
- Exhaust Duct Required – 6" round
- For most efficient airflow exhaust, use a straight run or as few elbows as possible.

- Use metallic flex ducting only to connect rigid duct directly to transitions (if allowed by code).
- Thermal breaks such as short section of nonmetallic duct, should be used in areas of extreme cold.
- Cold weather installations should have additional backdraft damper installed.
- Refer to web for detailed duct preparation installation instructions.

Ductless (Recirculated) Option Specifications

- If ducting to outside is not an option, vent hood can be converted to ductless with use of optional Duct-Free Kit (DFKTWC75GS).
- Refer to web for detailed convertible ventilation installation instructions.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.com for detailed instructions.

Optional Accessories

- Charcoal Filter – (CF40EC).
- Duct-Free Kit – (DFKTWC75GS).
- 35-7/16" Flue Extension – (EXWC75GS).