S-Series s-15V/s-17

STYLISH DESIGN

**AG Neovo S-Series Displays** 

Made for those who want a stylish award winning display



# Elegant & Rugged Design

Smart exterior with exceptional strength



# Brilliant Display

Patent pending NeoV Crystal Optic Filter offers superb color definition and image sharpness



### Ease Of Use

A host of input options, including analog, s-video and DVI-Digital




### Picture-In-Picture

Simultaneous computer display and video signal playback



### Desk/Arm/Wall Flexibility


VESA Compatible LCD display arm or wall mount kit both available

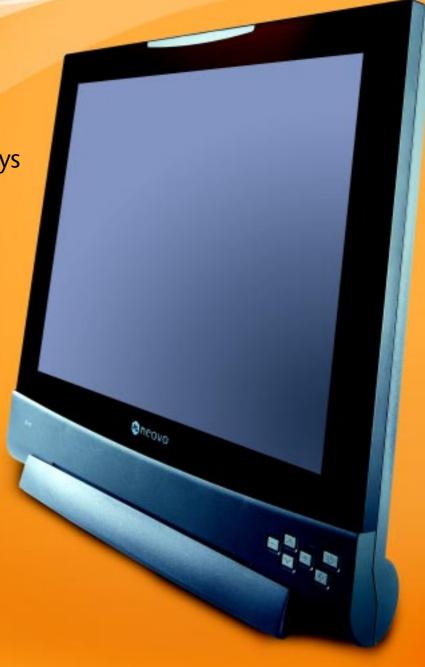

### **Features**

Neo-V Crystal Optic Filter 15"/17" TFT Active Matrix Screen 1024x768/1280x1024 Resolution Foldable Small Footprint Stand Analog, Video & Digital (S-17 only) Inputs



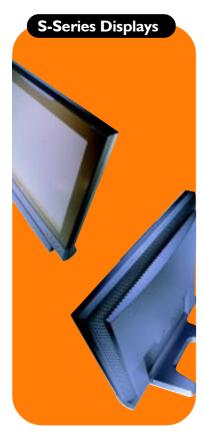

NeoV Crystal Optic Filter

Triple coated on both sides, the NeoV Crystal Optic Filter offers anti-glare, anti-reflective prop-erties, while delivering greater color defi-

#### Wide Viewing Angle

Wide angle viewing technology offers greater viewing clarity even when the display is seen from different angles.



#### Video In Port

Connect DVD, VCR or other video devices directly via a video in port.



#### **DVI-D Port**

Take advantage of the latest in technology, by connecting to the DVI-D port for a clearer image.



#### Picture-In-Picture

Watch computer display and DVD, VCR or other video simulataneously. (S-15V only)



Automatically adjusts screen settings for an optimal image, without changing settings manually.



On-Screen Display (OSD) makes adjusting the display settings quick and convenient.



### Total Flat Display

A completely flat display, with absolutely no curvature, generates a truer and less distorted view.



LCD Display Arm Advanced gas-spring suspen-sion guarantees smooth stable operation, and flexibility of use.



#### Wall Mount K

Mount the LCD display on the wall to save even more valuable desktop space.



#### Security Lock

Increase security by anchoring the LCD display to an immovable object. Compatible with Kensington® security locks.



## **Specifications Panel**

Panel Type Panel Size Max. Resolution Pixel Pitch Brightness Contrast Ratio **Surface Treatments** 

Viewing Angle (H/V) Display Color Response Time Wide Viewing Angle Frequency

Max. Pixel Clock

15-Pin Mini D-Sub 4-Pin Mini Din S-Video CVBS Jack N/A

S-15V

TFT LCD

0.297mm

16.7M

80MHz

15.0" (381mm)

500:1 (Typical)

XGA 1024 x 768

350cd/m<sup>2</sup> (Typical)

Hard Coating (2H)

15ms /10ms (Typical)

Vertical: 50Hz - 75Hz

& Anti-glare treatment 170°/170° (Minimum) Horizontal: 30kHz - 60kHz

**S-17** 

TFT LCD 17.0" (430 mm) SXGA 1280 x 1024 0.264mm 250cd/m<sup>2</sup> (Typical) 500:1 (Typical) Hard Coating, Anti-glare & Anti-Static 170°/170° (Minimum) 16.7M 15ms /10ms (Typical) Horizontal: 30kHz - 80kHz Vertical: 50Hz - 75Hz 135MHz

15-Pin Mini D-Sub 4-Pin Mini Din S-Video CVBS Jack 29-Pin DVI-D

3-Pin AC Plug 3-Pin AC Plug

NeoV Crystal Optic Filter

**Connector** Power

**Inputs** Analog

Video

Digital

Thickness Reflection Rate Transmission Rate Hardness (Moh's Rating) 2.8mm (0.11") < 1% > 94% > 6H

386 x 360 x 169mm

2.8mm (0.11") < 1% > 94% > 6H

Yes (100mm)

5°~ 20° (Tilt) 5°~ 20° (Tilt) Tilt/Swivel Tilt Angle / Swivel

Yes (75mm) **Mounting** VESA FPMPMI

**Dimensions** Net (W x H x D) (15.2" x 14.2" x 6.7") Packing (W x H x D) 475 x 480 x 210mm

(18.7" x 18.9" x 8.3") 5.5Kg (12.1lb)

436 x 426 x 200mm (17.2" x 16.8" x 7.9") 550 x 576 x 220mm (21.7" x 22.7" x 8.7")

7.5Kg (16.5lb) Weight Net Weight 10.6Kg (23.3lb) 7.5Kg (16.5lb) Gross Weight

Regulation Safety & EMI **Approval** 

FCC, UL/CUL, EPA, TUV/ GS, CE, NORDIC, TCO95, NUTEK, BSMI, VCCI, CCC, CB

FCC, UL/CUL, EPA, TUV/ GS, CE, NORDIC, TCO95, NUTEK, BSMI, VCCI, CCC, CB

DDC1/2B, DPMS DDC1/2B, DPMS **VESA** 

**Power** Power AC

Consumption

100~240V, 50~60Hz < 48W (On), < 5W (Stand-by)

100~240V, 50~60Hz < 48W (On), < 5W (Stand-by) < 5W (Off)

All specifications are subject to change without prior notice. © 2003 Associated Industries China Inc. The name AG Neovo is a trademark of AIC. All other trademarks are the property of their respective owners.

< 5W (Off)























DM Code: MKT-S57E-0303