
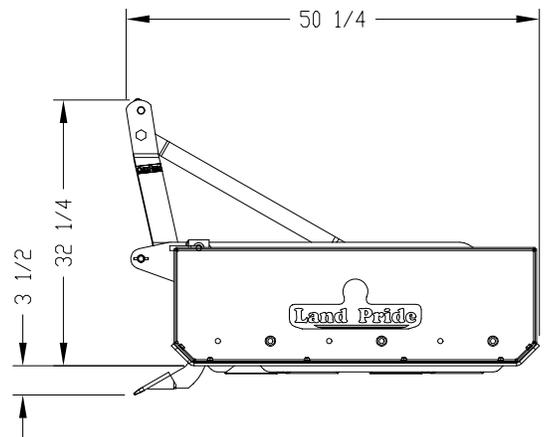


**Grading Scrapers**

**GS15 Series**

| Description                             | GS1548   | GS1560   | GS1572   |
|---|--|----------|----------|
| Working Width                           | 48"  | 60"      | 72"      |
| Overall Width                           | 54 1/4"  | 66 1/4"  | 78 1/4"  |
| Number of Scarifier Shanks              | 4  | 4        | 5        |
| Tractor HP Requirement                  | 20-50 hp   | 25-50 hp | 25-50 hp |
| Unit Weight with Shanks                 | 437 lbs.   | 511 lbs. | 594 lbs. |
| Overall Length                          | 50"  |          |          |
| Overall Height                          | 32"  |          |          |
| Side Panel Height                       | 14"  |          |          |
| Side Panel Length                       | 44"  |          |          |
| Side Panel Thickness Tractor            | 3/16" Thick with 2 3/4" formed edges.  |          |          |
| Front Main Beam & Scarifier Support.    | 4"x 4" x 5/16" Reinforced heavy wall tubing.   |          |          |
| Rear Beam Construction                  | 2"x 2"x 3/16" Heavy wall tubing.   |          |          |
| Skid Shoe Dimensions                    | 3/8" Thick x 2 3/4" wide x 44" long.   |          |          |
| Scarifier Shank Construction - Optional | Heat treated 4-position shank with dimpled-on hardened tips.   |          |          |
| Cutting Edges                           | Two 1/2" x 6" high carbon heat treated blades that are reversible and replaceable.   |          |          |
| Cutting Edge Placement                  | Two parallel grading blades positioned at a 5 degree grading angle with 17 1/2" fore and aft spacing in between leading edges. |          |          |
| Cutting Edge Adjustment                 | Infinite vertical adjustment from level grade to 1 1/2" below grade.   |          |          |
| Shank Adjustments                       | 3 1/2" and 1 1/2" below grade level.<br>1/2" and 2 1/2" above grade level.   |          |          |
| Lower Draft Link Attachment             | Clevis type  |          |          |
| Hitch Type                              | Category 1 and Category 1 Quick Hitch  |          |          |
| Color Selections                        | Land Pride beige or orange   |          |          |

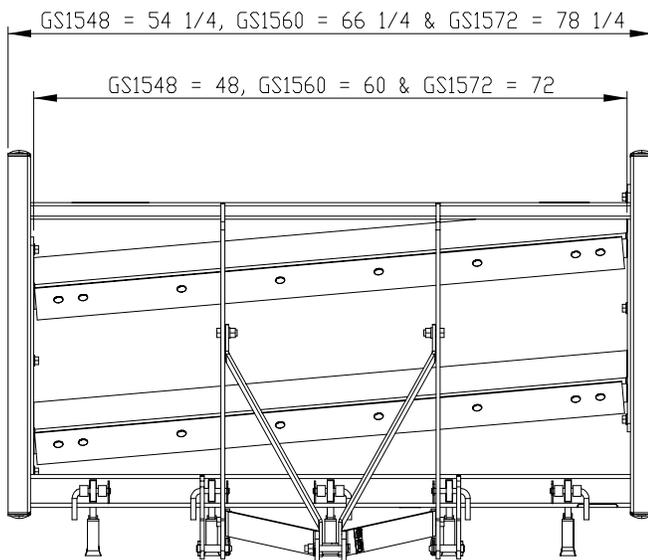

26758

*Designs, specifications, features and information are subject to change without notice.*