



# **DMS1 Multimedia Speaker System**



## **User Manual**



## **DMS1 Multimedia Speaker System**

Thank you for purchasing the Califone® DMS1 Multimedia Speaker System.

We encourage you to visit our website [www.califone.com](http://www.califone.com) to register your product for its warranty coverage, to sign up to receive our newsletter, download our catalog, and learn more about the complete line of Califone® audio visual products, including portable and installed wireless PA systems, multimedia players and recorders, headphones and headsets, computer peripheral equipment, visual presentation products and language learning materials.

## 1. IMPORTANT SAFETY INSTRUCTIONS

Before using this product, read the instruction manual for important safety information. Please retain this manual for future reference and warranty information.

### Troubleshooting & Servicing

Do not attempt to service or repair the device yourself. Refer all servicing to qualified service personnel. Do not attempt to modify the device in any way. Doing so could invalidate your warranty.

### Moisture and heat sources

Do not use this apparatus near water (for example, sinks, baths, pools) or expose it to rain, moisture, dripping or splashing liquids. Do not expose the unit to high temperatures, high humidity or direct sunlight.

### Cleaning

When cleaning the device, please use a soft, dry cloth. Never use benzene, paint-thinner, or other chemicals on the device.

### Location

Place the device in stable location, so it will not fall causing damage to the device or bodily harm.

### Intended use


The product may only be used with the original parts intended for it. The product may only be used in closed and dry rooms. The intended use includes adherence to the specified installation instructions. The manufacturer accepts no liability for damage arising due to improper use.

## 2. PACKAGE CONTENTS


- 2pcs satellite speakers with 3' speaker cord and RCA plug
- Subwoofer
- 3'-length stereo RCA to 1/8" stereo audio patch cable
- Power Adapter
- User Manual

## 3. PART NAMES AND FUNCTIONS

Subwoofer Front View

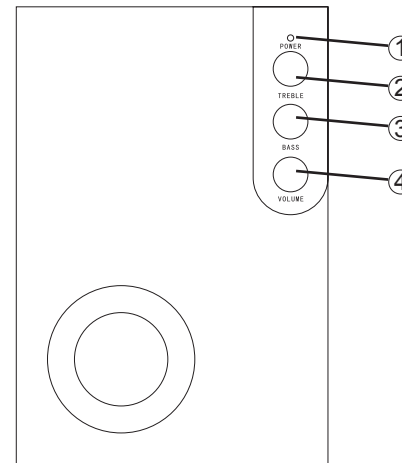

Subwoofer Rear View

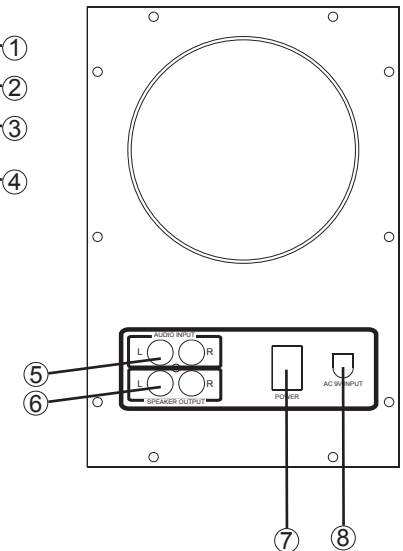

1. POWER LED
2. TREBLE KNOB
3. BASS KNOB
4. VOLUME KNOB

5. AUDIO (LINE) INPUT JACKS
6. LEFT/RIGHT SPEAKER OUTPUT JACKS
7. POWER SWITCH
8. POWER INPUT JACK

## 4. SETUP AND INSTALLATION

### 4.1 SPEAKER SETUP

1. Ensure that the power switch on the back of the subwoofer is in the OFF position.
1. Ensure that the voltage on the power adapter corresponds to the AC voltage of your local area.
2. Unravel the AC line cord and insert plug into the AC outlet.
3. Insert the other end into the power jack on the rear of the subwoofer.
4. Connect the RCA plugs for the left and right satellite speakers to the corresponding "SPEAKER OUTPUT" jacks on the subwoofer.
5. Using the included cable, connect the output of the PC or other A/V equipment (mp3 player, boombox headphone output, etc.) to the AUDIO INPUT jacks on the rear of the subwoofer.

## 5. BASIC OPERATION

### 5.1 SPEAKER OPERATION

1. Switch on the power using the power switch on the back of the subwoofer. The POWER LED on the front of the subwoofer should light red.
2. Adjust the output volume of the PC or A/V equipment to about 3/4 volume. Then slowly increase the volume of the DMS1 using the volume knob on the front of the subwoofer until the volume is at the desired level.
3. Use the treble/bass controls to adjust the audio quality.

**CAUTION:** Avoid excessive volume for long periods of time as this can result in hearing damage.

## 6. TROUBLESHOOTING

No sound	<ul style="list-style-type: none"><li>• Check that the power LED on the subwoofer is ON. If not, check the power connections and that the power switch is in the ON position.</li><li>• Check that the audio cables are well connected and the audio output from the PC or A/V device is working.</li></ul>
----------	---

## 7. SPECIFICATIONS & FEATURES

Power requirements	120VAC/60Hz -> 9VAC/1000mA power adapter
Channels	2 Channel (Stereo)
Frequency Response	80 Hz - 20 kHz
Sensitivity	87 dB / W*m
Speakers	Satellite Speakers: 3" / 4 ohm Subwoofer: 4" / 8 ohm
Rated / Max Output Power	Satellite Speakers: 1 W / 3 W Subwoofer: 3W / 5W Total: 5W / 11W
S/N Ratio	> 45 dB
Product Dimensions	Satellite Speakers: 3.75" x 4.25" x 5.75" Subwoofer: 9" x 6" x 10.75"
Product Weight (incl. accessories)	5 lbs 7 oz

## 8. WARRANTY

Califone warrants this product to be free from defective material and workmanship for one year from the purchase date. Our "Project Intercept" Customer Satisfaction program will replace defective parts and repair malfunctioning equipment under this warranty when the defect occurs under normal use.

### All Damage Claims Must Be Made With the Freight Carrier

Notify the freight carrier immediately if you observe any damage to the shipping carton or product. Repack the unit in the carton and await inspection by the carrier's claim agent. Notify your dealer of the pending freight claim.

### Returning Your Unit for Service or Repairs

Should your unit require service, contact our Customer Service Department online at [califone.com/techsupport](http://califone.com/techsupport) or via email [warranty@califone.com](mailto:warranty@califone.com) or by phone at 800-722-0500 / 818-407-2400 to first obtain an RA (Return Authorization) number before returning it to Califone. The unit must be returned to our factory via prepaid transportation only after the factory issues an RA number, which must be clearly written on the outside of the box.

**Califone® International, Inc.**  
**1145 Arroyo Avenue, #A**  
**San Fernando, CA 91340 USA**  
**Toll Free 800.722.0500 | Toll Free Fax 877.402.2248**  
**International Customers call 818.407.2400 or Fax 818.407.2405**  
**califone.com**