



Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

## Shallow Depth Fish File Refrigerators

**RS MODELS —**  
 Stainless steel  
 exterior and interior.

**RS-1N-S7-FF**  
**RS-2N-S7-FF**

### Remote Models Available



**RS-1N-S7-FF**

### Standard Features

- Digital Thermometer/Battery Back-up
- Energy Saver Switch
- Stainless Steel Case Front, Sides and Interior
- Stainless Steel Drawers with Self Adjusting Magnetic Gaskets
- Adjustable Stainless Steel Legs
- Lifetime Safety Grip Handles
- Plasticized Fin Coil
- Environmentally Friendly R-134a Refrigerant
- Cord and Plug Attached on 115V Models 12 Amps or Less
- Floor Drain

### Optional Features and Accessories

- Dial Thermometer
- Locks for Drawers
- 5" Diameter Heavy-Duty Swivel Casters with Brakes
- Stainless Steel Case Back
- Remote Models

#### Cabinet:

Victory's fish file 40°F refrigerator provides storage of fresh seafood in easy to reach stainless steel drawers. Each cabinet is internally supported, braced and assembled into a single rigid unit. The cabinet front and drawers are constructed of heavy gauge polished stainless steel to maintain an attractive appearance after years of heavy use. Foamed-in-place polyurethane insulation throughout the cabinet ensures the ultimate in energy efficiency.

#### Drawers:

Heavy-duty drawers have safety grip handles and self adjusting magnetic gaskets. Drawer runners are of heavy gauge steel with anti-friction action. Drawer pan internal dimensions are 14<sup>3</sup>/<sub>4</sub>" x 19<sup>3</sup>/<sub>4</sub>" long and 6" deep (supplied by Victory).

#### Refrigeration System:

All components of the self-contained refrigeration system are mounted on top of the cabinet. The air circulating fans and the forced convection cooling coil are contained within a ceiling mounted low profile housing. A drain in the lower compartment bottom terminates waste water in a 1" male pipe fitting for connection to a floor drain. Plumbing is required.

NOTE: Cooling coil is contained within a ceiling mounted low profile housing

Approvals:



Victory Refrigeration specification sheets are available online at [www.victory-refrig.com](http://www.victory-refrig.com).


CHARACTERISTICS	ONE SECTION	TWO SECTION
Width, Overall	26 1/2	52 1/8
Depth, Overall (incl. handles)	29 7/8	29 7/8
Height, Overall (incl. adj. legs)	84	84
Total Capacity of Drawers (cubic Feet)	4	8
No. of Drawers	4	8
Drawer Pan - Width	14 3/4	14 3/4
Drawer Pan - Depth	19 3/4	19 3/4
Drawer Pan - Height	6	6
Cabinet Voltage	115/60/1	115/60/1
Feed Wires	2	2
Condensing Unit Voltage	115/60/1	115/60/1
Condensing Unit Size (HP)	1/4	1/3
Total Amperes	8.0	11.3

Crated dim. & wts.	Ht.	Width	Depth	Cu.Ft.	Lbs
One Section	82	36 1/2	44 3/4	77.5	565
Two Section	87	63 5/8	44 3/4	135.1	845

**FOR REMOTE MODELS**— Substitute an "R" for the "S" in suffix. For example: Model RS-1N-S7-FF (self-contained) would be RS-1N-R7-FF remote cabinet. Air circulating fans, expansion valve and plasticized coil are provided. Condensing units not supplied. The following units are recommended with 1/2" O.D. Suction line, 1/4" O.D. Liquid line.

REMOTE REFRIGERATION	Cond. Unit	BTUH	Cabinet	Amps
One Section	1/4 H.P.	2030	115/60/1	2.5
Two Section	1/3 H.P.	2540	115/60/1	3.4

Dimensional tolerance ± 1/4" Metric dimensions (MM)

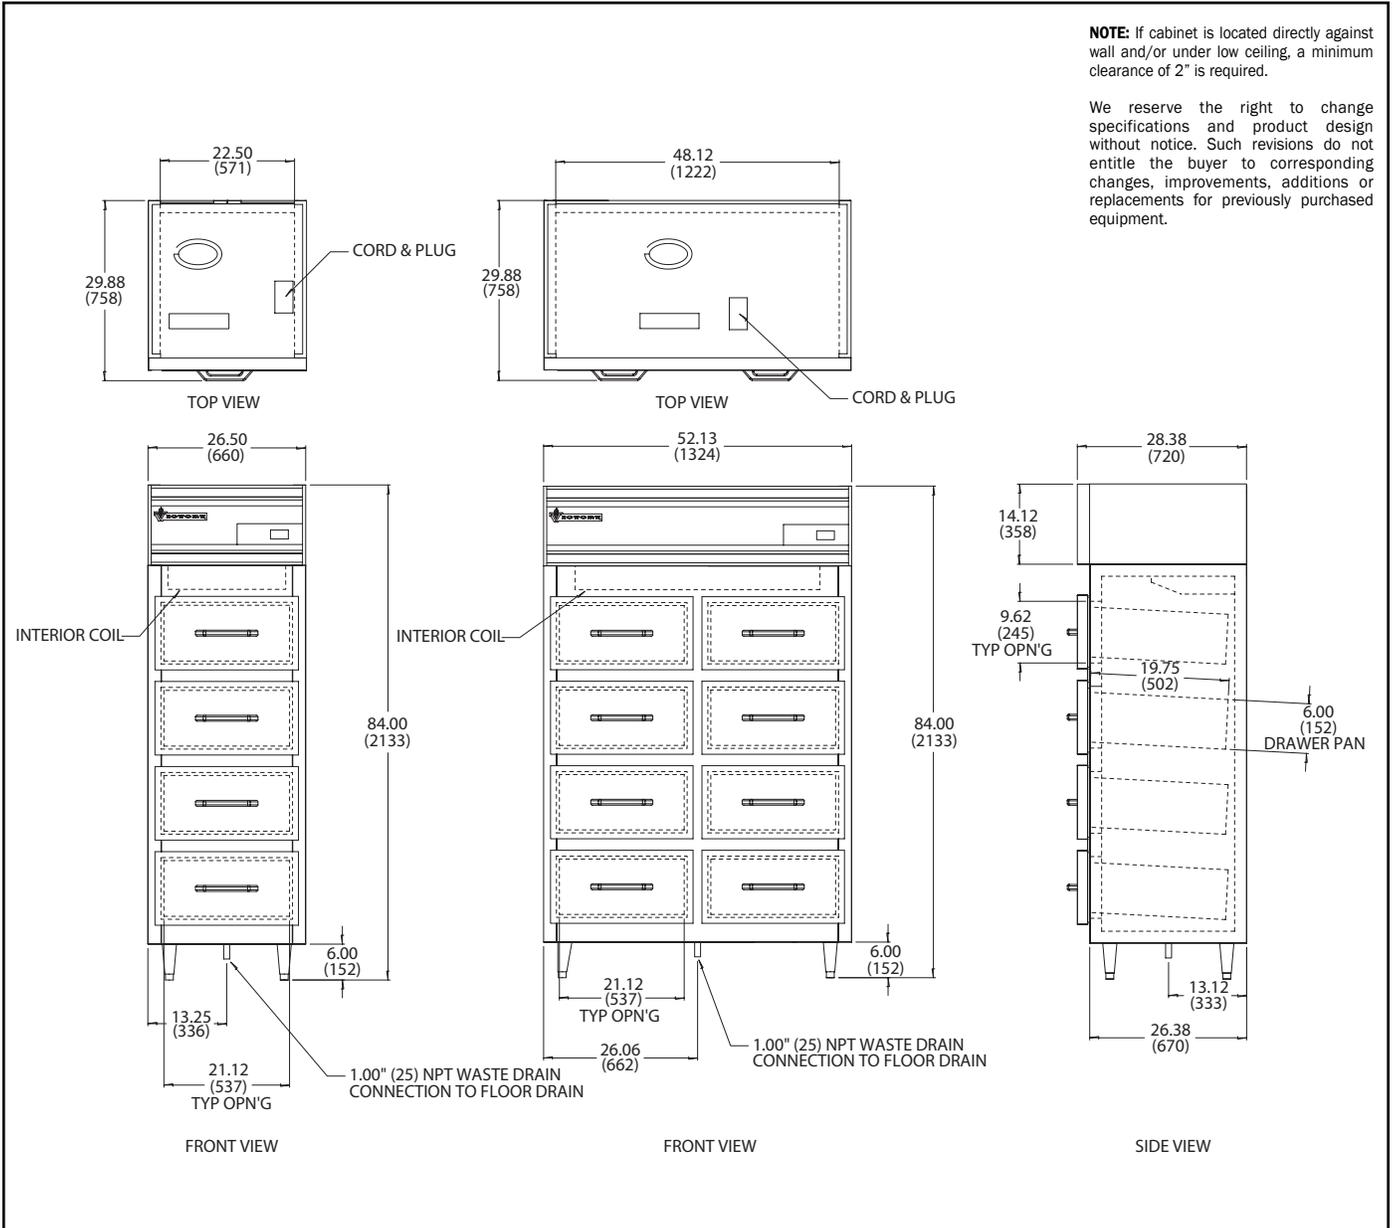

Continuous product development may necessitate specification changes and design without notice.



Victory participates in the KCL CADalog, the most current source of CAD symbols for foodservice designers worldwide. Symbols include standard equipment in plan, side, front and 3-D views, layered for FEDA/FCSI recommended guidelines.