

**DESCRIPTION**

The 1215 Shallow Direct/Indirect High Performance Luminous Pendant features a Double Trim Ring (2TR) or a Traditional Trim Ring (TTR) and is available in three diameters with multiple mounting options.

<b>Catalog #</b>		<b>Type</b>
<b>Project</b>		
<b>Comments</b>		<b>Date</b>
<b>Prepared by</b>		

**SPECIFICATION FEATURES**

**Material/Mounting**

Painted and plated cold rolled steel or natural aluminum with a matte white acrylic bowl. Single Stem (Standard): 5/8" stem with a standard hang height of 28" (OA) for the 26" dia., 32" (OA) for the 36" dia. and 42" (OA) for the 44" dia. Minimum overall hang height is 18" (OA). Maximum overall hang height for one-piece stem assembly is 8' (OA). 9' to 30' (OA) stems are supplied in multiple sections and require field assembly. Supplied with a swivel canopy which will accommodate up to 45° adjustment. pattern) - SC (Satin Chrome) stem(s).

**Finish**

Standard: Matte White (MW). Premium: Natural Aluminum (NA) [Sustainable Design], Satin Chrome (SC), Polished Chrome (PC), Satin Nickel (SN), Polished Nickel (PN), Satin Brass (SB), Polished Brass (PB), Oxidized Brass (OBRS), Lacquered Satin Aluminum (SAL), Satin Copper (SCP), Polished Copper (PCP), Oxidized Copper (OCP), Gun Metal (GNM) or Custom Paint Color (CC). Regressed solid edge (between rings) will be satin finish with all polished finishes with the 2TR. Custom Decorative Metals: (Specify a Color and Pattern) Colors - Clear (CLR), Cabernet (CBT), Sapphire (SPE), Sage (SGE), Brass (BRS), Copper (CPR), Black Pearl (BPL), Slate Green (SGN), Champagne (CMP), Chocolate (CLE), Indigo (IDO), Royal Blue (RBE), or Pewter (PWR). Patterns - Coral (COL), Seashell (SHL) or Smooth (SMT). Note: Select a standard or premium finish for the stem(s) and canopy. Example: SGE (Sage color finish) - SMT (Smooth pattern) - SC (Satin Chrome) stem(s) and canopy. Minimum quantity is 5 for one

color/pattern. Contact the factory for lead time.

**Optics**

Dedicated CFL lamp optics with a "kick reflector" formed out of 94% reflective specular anodized aluminum. Three or four individual T6 metal halide or halogen dedicated optic systems. The main reflector is formed with 94% reflective specular anodized aluminum and the upper reflector is formed out of 94% reflective semi-specular anodized aluminum.

**Ballast**

Integral CFL electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage. Metal Halide ballast is electronic HPF, multi-volt (120V/277V) for the specified lamp wattage. 347V MH ballast - contact factory.

**Lamp/Socket**

26" - Three (3) or six (6) 27W (2G11) high lumen CFL lamps, three (3) 32W (GX24q-3) or 42W (GX24q-4) 4-pin triple CFL lamps, or three (3) 39W or 70WT6 CDM metal halide lamps, or three (3) 150WT4 (DC Bay) clear linear halogen lamps. One (1) 22W (2GX13) T5 circular lamp (bowl illumination). 36"- Three (3) or six (6) 27W, 39W, 40W, 50W or 55W (2G11) high lumen CFL lamps, three (3) 32W (GX24q-3), 42W (GX24q-4) 4-pin triple or 57W (GX24q-5) or 70W (GX24q-6) 4-pin triple HO CFL lamps or three (3) 39W, 70W or 150WT6 CDM metal halide lamps or three (3) 150WT4 (DC Bay) clear linear halogen lamps. One (1) 40W (2GX13) T5 circular lamp (bowl illumination). 44" - Four (4) or eight (8) 27W, 39W, 40W, 50W or 55W (2G11)

high lumen CFL lamps, four (4) 57W (GX24q-5) or 70W (GX24q-6) 4-pin triple HO CFL lamps or four (4) 70W or 150WT6 CDM metal halide lamps, or four (4) 150WT4 DC Bay) clear linear halogen lamps. One (1) 40W (2GX13) T5 circular lamp (bowl illumination). CFL sockets injection molded plastic. Metal halide socket ceramic pulse-rated, 4KV. Lamps furnished by others.

**Installation**

Installation requires 1/4-20 UNC-2A All Thread rod. All Thread (supplied by others) through a standard J-box to an integral support canopy support system. The 1/4-20 UNC-2A All Thread rod must be attached to the building structure to support the fixture's weight.

**Options**

Dimming Ballast - Except 27W, & DM bowl illumination as a MOD with T5 55W only, contact factory for ballast options (DM), Sloped Ceiling Adaptor - Specify up to 45° (SCA), Triple Stem (3S), Single Stem with Aircraft Cable (1SAC), Aircraft Cable with White SJ Cord (SJWAC), Aircraft Cable with Clear SJ Cord (SJCAC), Quad Pod - 44" only (QP), Tri-Pod - 26" & 36" only (TP), Hand-Painted Faux Alabaster Bowl (FB), Hand Painted Faux Linen Bowl (LNB), Remote Emergency Battery (REM), Separate Switching - contact factory (SSW), Factory Fuse (FF) & Quartz Restrike - contact factory, Downlight (D), Damp Location (DL): All Painted Finishes, Lacquered Satin Chrome (SCL) and Lacquered Satin Nickel (SNL) finishes only. Contact factory for multi-bowl and alternative mounting options.



**1215-TTR SERIES**

High Performance  
Pendant Luminaire  
Indirect/Direct  
Shallow Bowl with  
Two Trim Options



**New Custom  
Decorative Metals Finish**

**HP HIGH PERFORMANCE OPTICS**

Shaper offers a line of products that offer optically-engineered, high performance optics for compact fluorescent, metal halide and halogen sources.

**SD SUSTAINABLE DESIGN**

Shaper has a long-standing history of offering environmentally-friendly fixtures. The copper and bronze alloys used in our exterior luminaires feature up to 98% recycled content, contribute less undesirable air emissions compared to painted aluminum and are easy to recycle.

Refer to the Icon Legend  
Link on shaperlighting.com.

**Labels**

U.L. and C.U.L approved for indoor and damp location. See options for damp location finishing requirements.

**Modifications**

Shaper's skilled craftspeople with their depth of experience offer the designer the flexibility to modify standard high performance pendant luminaires for project-specific

solutions. Contact the factory regarding scale options, unique finishes, mounting, additional materials/colors, or decorative detailing.

**ORDERING INFORMATION**


Sample Number: 1215-TTR-26-CFL-3-27-120V-PC-26

<b>Series</b> 1215-2TR 1215-TTR	<b>Size</b> 26" 36" 44"	<b>Lamp</b> <b>26"</b> CFL/3/27 CFL/6/27 CFL/3/32 CFL/3/42 MH/3/39 MH/3/70 HAL/3/150 <b>36"</b> CFL/3/27 CFL/3/39 CFL/3/40 CFL/3/50 CFL/3/55 CFL/6/27 CFL/6/39 CFL/6/40 CFL/6/50 CFL/6/55 CFL/8/27 CFL/8/39 CFL/8/40 CFL/8/50 CFL/8/55 CFL/4/57 MH/3/39 MH/3/70 MH/3/150 HAL/3/150 <b>44"</b> CFL/4/27 CFL/4/39 CFL/4/40 CFL/4/50 CFL/4/55 CFL/8/27 CFL/8/39 CFL/8/40 CFL/8/50 CFL/8/55 CFL/4/57 CFL/4/70 MH/4/70 MH/4/150 HAL/4/150	<b>Voltage</b> 120V 277V 347V	<b>Finish</b> <u>Standard</u> <b>MW</b> =Matte White <u>Premium</u> <b>CC</b> =Custom Color <b>NA</b> =Natural Aluminum <b>OBRS</b> =Oxidized Brass <b>PB</b> =Polished Brass <sup>1</sup> <b>PC</b> =Polished Chrome <sup>1</sup> <b>PCP</b> =Polished Copper <sup>1</sup> <b>PN</b> =Polished Nickel <sup>1</sup> <b>SAL</b> =Lacquered Satin Aluminum <b>SB</b> =Satin Brass <b>SC</b> =Satin Chrome <b>SCL</b> =Lacquered Satin Chrome <b>SCP</b> =Satin Copper <b>SN</b> =Satin Nickel <b>SNL</b> =Lacquered Satin Nickel	<b>Color</b> <u>Custom Decorative Metals</u> <sup>4</sup> <b>CLR</b> =Clear <b>CBT</b> =Cabernet <b>SPE</b> =Sapphire <b>SGE</b> =Sage <b>BRS</b> =Brass <b>CPR</b> =Copper <b>BPL</b> =Black Pearl <b>SGN</b> =Slate Green <b>CMP</b> =Champagne <b>CLE</b> =Chocolate <b>IDO</b> =Indigo <b>RBE</b> =Royal Blue <b>PWR</b> =Pewter	<b>Pattern</b> <sup>2</sup> <b>COL</b> =Coral <b>SHL</b> =Seashell <b>SMT</b> =Smooth  <b>Stem and Canopy Finish</b> <sup>5</sup> <u>Standard</u> <b>MW</b> =Matte White <u>Premium</u> <b>CC</b> =Custom Color <b>NA</b> =Natural Aluminum <b>OBRS</b> =Oxidized Brass <b>PB</b> =Polished Brass <sup>1</sup> <b>PC</b> =Polished Chrome <sup>1</sup> <b>PCP</b> =Polished Copper <sup>1</sup> <b>PN</b> =Polished Nickel <sup>1</sup> <b>SAL</b> =Lacquered Satin Aluminum <b>SB</b> =Satin Brass <b>SC</b> =Satin Chrome <b>SCP</b> =Satin Copper <b>SN</b> =Satin Nickel	<b>Options</b> <b>1S</b> =Single Stem <b>1SAC</b> =Single Stem Aircraft Cable <b>3S</b> =Three Stem <b>SJCAC</b> =Aircraft Cable w/ Clear SJ Cord <b>SJWAC</b> =Aircraft Cable w/ White SJ Cord <b>DL</b> =Damp Location <b>DM</b> =CFL Dimming Ballast <sup>3</sup> <b>FF</b> =Factory Fuse <b>REM</b> =Remote Emergency Battery <sup>6</sup> <b>SCA</b> =Sloped Ceiling Adapter <b>SSW</b> =Separate Switching <b>LNB</b> =Hand Painted Faux Linen Bowl  <b>Suspension Height</b> 26" (OA) - 26" dia. 30" (OA) - 36" dia. 38" (OA) - 44" dia. or Specify
---------------------------------------	----------------------------------	---	--	---	--	--	--

**Notes:**

- <sup>1</sup> Available in 26" Only. <sup>2</sup> Available with Custom Decorative Metal Finish only. <sup>3</sup> T5 22 & 40W - dimming ballast are not available. If bowl illumination requires dimming, contact the factory for a T5-55W MOD. <sup>4</sup> Interior applications only.
- <sup>5</sup> Select a standard or premium finish for the stem(s) and canopy. Example: SGE (Sage color) - SMT (Smooth pattern) - for the double trim rings stem(s) and canopy. Minimum quantity is 5 for one color/pattern. Contact the factory for lead-time.
- <sup>6</sup> Supplied by others.

**DIMENSIONS**

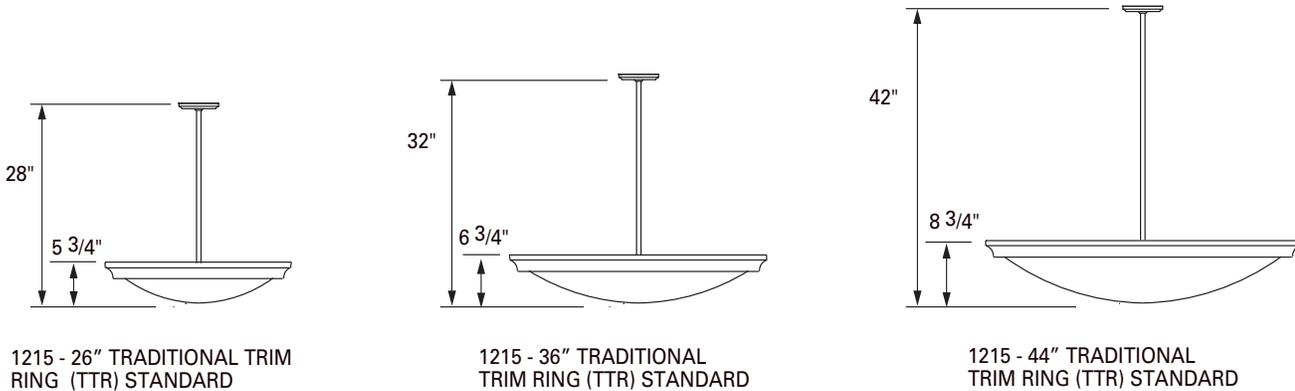

1215 - 26" TRADITIONAL TRIM RING (TTR) STANDARD

1215 - 36" TRADITIONAL TRIM RING (TTR) STANDARD

1215 - 44" TRADITIONAL TRIM RING (TTR) STANDARD

1215-TTR - SUSPENSION OPTIONS STANDARD

SUSPENSION OPTIONS

**Triple Stem (3S):** 5" canopy with a 1 1/2" swivel ball. One 5/8" stem with a standard hang height of 24" (OA), minimum 18" (OA). Maximum overall hang height for one piece stem assembly is 5' (OA). For 8' to 30' (OA) the stems are supplied in multiple sections. Specify SCA for sloped ceilings up to 45°.

**Single Stem Aircraft Cable (1SAC):** Three or four 3/8" stems with a standard hang height of 24" (OA), minimum 18" (OA). Maximum overall hang height is 8' (OA). Contact factory for lengths above 8'. Specify SCA for sloped ceilings up to 45°.

**Aircraft Cable with SJ Cord (SJAC):** One 5/8" stem and 3/32" cables with a standard hang height of 24" (OA), minimum 18" (OA).


**Tri-Pod (TP):** 3/32" cables with a standard hang height of 24" (OA), minimum 18" (OA). Maximum overall hang height is 25' (OA). Contact factory for lengths above 25'. Specify SCA for sloped ceilings up to 45°. 26" & 36" dia. only.

**Quad-Pod (QP):** 3/32" cables with a standard hang height of 24" (OA), minimum 18" (OA). Maximum overall hang height is 25' (OA). Contact factory for lengths above 25'. Specify SCA for sloped ceilings up to 45°. 44" dia. only.


INSTALLATION

Contractor to provide appropriate structural support for fixture weight. Refer to the installation drawings for details. Integral safety cable provided. Refer to specification sheets at [shaperlighting.com](http://shaperlighting.com) for additional and/or enlarged luminaire drawings.


1215-TTR - SUSPENSION OPTIONS STANDARD

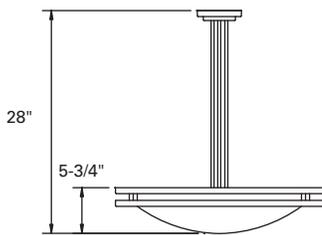


1215-TTR TRIPLE STEM (3S)

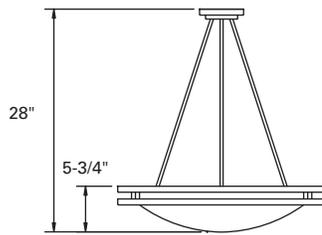


1215-TTR TRI-POD (TP) - 26" & 36"

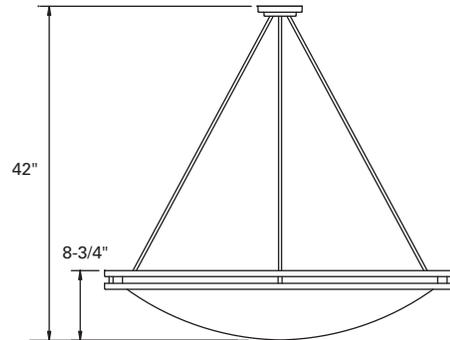


1215-TTR QUAD-POD (QP) - 44"

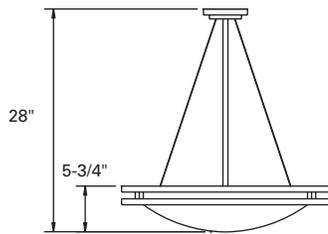


1215-TTR SINGLE STEM AIRCRAFT CABLE (1SAC)

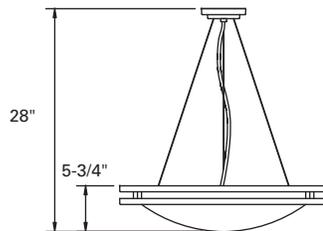

1215-TTR AIRCRAFT CABLE SJ CORD (SJAC)

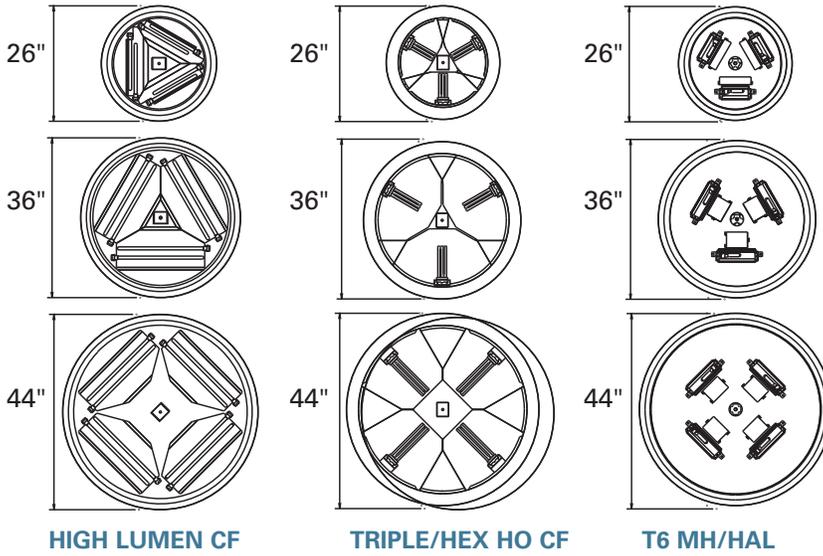

1215-TTR - PLAN VIEW STANDARD



1215-TTR - DOUBLETRIM RING

COMPANION PRODUCTS

