

# PrPMC800 Series

## High-Performance Processor PMC

Embedded Computing for  
Business-Critical Continuity™

**The Emerson PrPMC800 series processor PCI mezzanine card (PMC) is the ideal solution when time-to-market and flexibility are important.**


- MPC7410 PowerPC® microprocessor
- Altivec technology
- Latest high-performance PowerPlus III Architecture
- 2MB/1MB of L2 cache
- Up to 512MB on-board ECC SDRAM
- 32MB on-board flash
- 72-bit ECC memory controller ASIC
- Single-wide PMC with a 66/33 MHz PCI interface
- Optional 10/100BaseT Ethernet interface
- 64-bit PCI host bridge
- One asynchronous serial debug port
- Hardware DMA channel
- Four 32-bit timers
- Two watchdog timers

The Emerson PrPMC800 series processor PCI mezzanine card (PMC) is the ideal solution when time-to-market and flexibility are important. In addition to the highlighted features, this PMC module also includes a full-length heatsink, creating a CPU package capable of handling the thermal requirements of complex tasks.

Processor PMC (PrPMC) modules provide a complete host CPU and memory subsystem to a base board full of PCI-based I/O controllers in a compact, rugged, industry standard form factor. The PrPMC isolates the complexities of a high-speed CPU, cache and memory signals from application-specific hardware, enabling OEMs to focus on their market requirements while simplifying their product release. These modules also simplify CPU and memory upgrades in performance-driven embedded and telecom applications.



## PrPMC800 Block Diagram

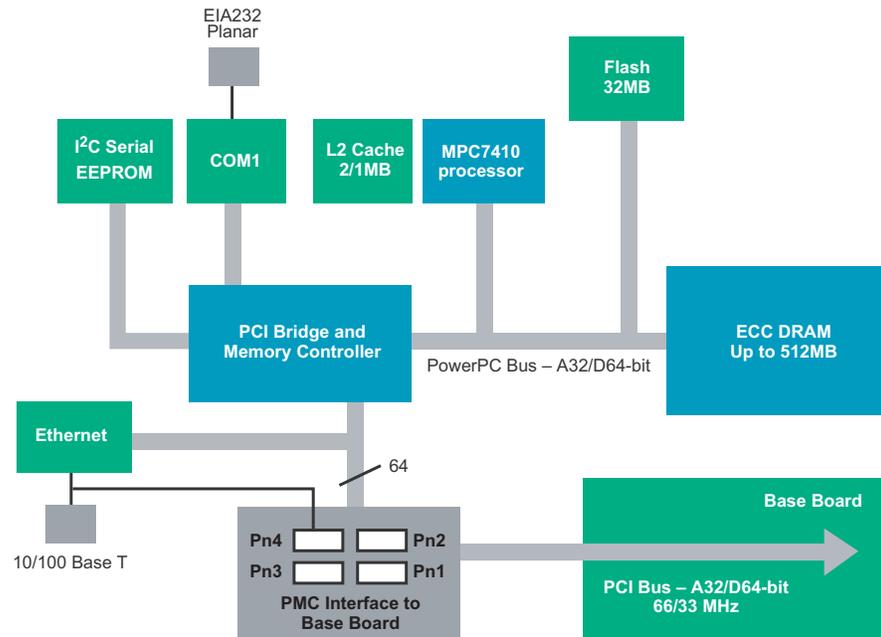

## Specifications

### PROCESSOR

- Microprocessor: MPC7410 class
- Clock Frequency: 400 – 500 MHz
- On-chip Cache (I/D): 32KB/32KB
- L2 Cache: 1MB – 2MB
- Cache Bus Clock Frequency: 180 MHz – 225 MHz

### MEMORY

- ECC Protected Main Memory: PC100 SDRAM
- On-board Capacity: Up to 512MB
- Single Cycle Accesses: 10 read/5 write
- Read Burst Mode: 8-1-1-1 idle; 3-1-1-1 aligned page hit (CL3)
- Write Burst Mode: 4-1-1-1 idle; 3-1-1-1 aligned page hit
- User I²C Serial EEPROM: 8KB
- EEPROM/Flash: 32MB surface mount (on-board programmable), up to 512MB addressable on carrier (optional)

### SYNCHRONOUS SERIAL PORT

- Controller: 16C550 compatible
- Number of Ports: One
- Configuration: DTE
- Async Baud Rate, b/s max.: 38.4K EIA-232, 115Kb/s raw

### IEEE P1386.1 INTERFACE

- Address/Data: A32/D32/D64, PMC Pn1, Pn2, Pn3, Pn4 connectors
- PCI Bus Clock: 33 MHz or 66/33 MHz capable
- Signaling: 3.3V output; VIO input
- Power: +3.3V
- Height: 13.5 mm from top of carrier board (one slot)
- Module Type: Single-wide

### ETHERNET

- Controller: Intel® 82559ER/82551IT
- PCI Bus Master: 33 MHz with PCI burst
- Connector: Models configured for Ethernet routing via Pn4 do not have a front bezel.

### COUNTERS/TIMERS

- Real-Time Timers/Counters: Four 32-bit programmable
- Watchdog Timers: Two, time-out generates interrupt or reset

### MISCELLANEOUS

- Reset, Abort and JTAG/COP via on-board debug connector
- Two planar LEDs for Fail and CPU active

### POWER REQUIREMENTS

(AltiVec disabled)

	+ 3.3V ± 5% @ 20° C
PrPMC8005E-12xx:	3.3 A typical, 3.9 A maximum
PrPMC8005E-13xx:	4.1 A typical, 4.5 A maximum
VIO:	PCI buffer diode clamping voltage

### DEMONSTRATED MTBF

(based on a sample of eight boards in accelerated stress environment.)

- Mean: 190,509 hours
- 95% Confidence: 107,681 hours

### SAFETY

All printed wiring boards (PWBs) are manufactured with a flammability rating of 94V-0 by UL recognized manufacturers.

### ENVIRONMENTAL

	Operating	Non-operating
Temperature:	0° C to +55° C, forced air cooling	
Humidity (NC):	5% to 85%	5% to 95%
Vibration:	1.0 G sine sweep, 5.0 to 100 Hz, 25 octaves/min	0.5 G sine sweep; 50-500 Hz; 0.1 octaves/min 3.0 G sine sweep; 5-50 Hz; 0.25 octaves/min

### ELECTROMAGNETIC COMPATIBILITY (EMC)

- Intended for use in systems meeting the following regulations:
  - U.S.: FCC Part 15, Subpart B, Class A (non-residential)
  - Canada: ICES-003, Class A (non-residential)
- This product was tested in a representative system to the following standards:
  - CE Mark per European EMC Directive 89/336/EEC with Amendments; Emissions: EN55022 Class B; Immunity: EN50082-1

Ordering Information	
Part Number	Description
33 MHz PCI, Front Ethernet	
PRPMC8005E-1261	450 MHz MPC7410, 256MB ECC SDRAM
33 MHz PCI, Rear Ethernet	
PRPMC8005E-1259	450 MHz MPC7410, 128MB ECC SDRAM
PRPMC8005E-1269	450 MHz MPC7410, 256MB ECC SDRAM
66 MHz PCI, No Ethernet	
PRPMC8005E-2261	450 MHz MPC7410, 256MB ECC SDRAM
PRPMC8005E-2271	450 MHz MPC7410, 512MB ECC SDRAM
Note: Additional PrPMC800 series models may be available; contact your local sales representative.	
Documentation	
PPMC800A/IH	PrPMC800 Installation and Use manual
PPMC800A/PG	PrPMC800 Programmer's Reference Guide

## SOLUTION SERVICES

Emerson Network Power provides a portfolio of solution services optimized to meet your needs throughout the product lifecycle. Design services help speed time-to-market. Deployment services include global 24x7 technical support. Renewal services enable product longevity and technology refresh. Plus solution extras include enhanced warranty and repairs.

PowerPC is a trademark of IBM Corp. and used under license. Intel is a registered trademark of Intel Corporation or its subsidiaries in the U.S. and other countries. All other product or service names are the property of their respective owners.

This document identifies products, their specifications, and their characteristics, which may be suitable for certain applications. It does not constitute an offer to sell or a commitment of present or future availability, and should not be relied upon to state the terms and conditions, including warranties and disclaimers thereof, on which Emerson Network Power may sell products. A prospective buyer should exercise its own independent judgment to confirm the suitability of the products for particular applications. Emerson Network Power reserves the right to make changes, without notice, to any products or information herein which will, in its sole discretion, improve reliability, function, or design. Emerson Network Power does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent or other intellectual property rights or under others. This disclaimer extends to any prospective buyer, and it includes Emerson Network Power's licensee, licensee's transferees, and licensee's customers and users. Availability of some of the products and services described herein may be restricted in some locations.

**Emerson Network Power.**  
The global leader in enabling  
Business-Critical Continuity™.

-  AC Power Systems
-  Embedded Power
-  Precision Cooling
-  Connectivity
-  Integrated Cabinet Solutions
-  Services
-  DC Power Systems
-  Outside Plant
-  Site Monitoring
-  **Embedded Computing**
-  Power Switching & Control
-  Surge & Signal Protection

### Emerson Network Power

**Offices:** Tempe, AZ U.S.A. 1 800 759 1107 or +1 602 438 5720 • Madison, WI U.S.A. 1 800 356 9602 or +1 608 831 5500  
Shanghai, China +86 21 5292 5693 • Paris, France +33 1 69 35 77 00 • Tokyo, Japan +81 3 5424 3101  
Munich, Germany +49 (0) 89 9 608 2 333 • Hong Kong, China +852 2966 3210 • Tel Aviv, Israel +972 3 568 4387

[www.EmersonNetworkPower.com/EmbeddedComputing](http://www.EmersonNetworkPower.com/EmbeddedComputing)

Business-Critical Continuity, Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.  
©2008 Emerson Electric Co.