



Pro 27" Deep Wall Ventilation Hoods

Along with standard features like heat sentry and dual setting halogen lighting, the Pro 27" deep wall hoods provide an additional exclusive feature—heat lamps. Available in seven widths, all Pro 27" deep wall hoods have the classic stainless steel finish. You also have the option of a decorative rail. While a classic stainless steel rail is standard on (R) models, platinum or brass rails are available to match the bezels of our dual fuel ranges and sealed burner rangetops.



Model PW482718 shown.
Also shown is Model DF484CG dual fuel range.

Features

- Classic stainless steel finish
- Rail (R) models feature a classic stainless steel decorative rail
- Heavy-duty, 16-gauge brushed stainless steel with continually welded seams, hemmed edges and sides
- Stainless steel enclosed liner
- Recessed easy-access controls
- Infinite-speed blower control
- Heat sentry feature automatically turns unit on when heat is sensed and automatically adjusts blower speed
- Halogen lighting with two settings
- Heat lamps—bulbs not included
- Removable, dishwasher-safe, restaurant-grade stainless steel baffle filters
- Transition with backdraft damper included

Model Options

Model	PW302718	PW362718	PW422718	PW482718	PW542718	PW602718	PW662718
Overall Width	30"	36"	42"	48"	54"	60"	66"

Model numbers are for hoods without decorative rail, add (R) to the model number for rail option models.

Accessories

- Platinum or brass decorative rail and stand-offs
- 38" high classic stainless steel backsplash with or without warming racks
- 6", 12", 18" and 24" classic stainless steel duct covers
- Horizontal discharge kit



Model PW602718 Pro Wall Hood

Accessories are available through your Wolf dealer. To obtain local dealer information, visit the Showroom Locator section of our website, wolfappliance.com.

Blower Options

- 600, 900 and 1200 CFM internal blowers
- 600 and 1100 CFM in-line blowers
- 600, 900, 1200 and 1500 CFM remote blowers

Pro 27" deep wall hoods are sold as a shell only. An internal, in-line or remote blower is required. For blower recommendations, visit our website, wolfappliance.com.



Recessed Controls




Heat Lamps




Pro 27" Deep Wall Ventilation Hoods

Overall Dimensions

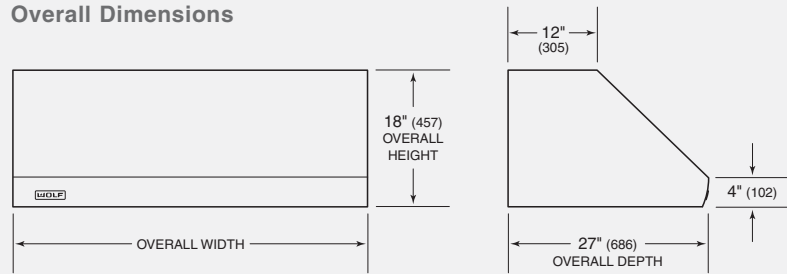

Pro 27" Deep Wall Hood

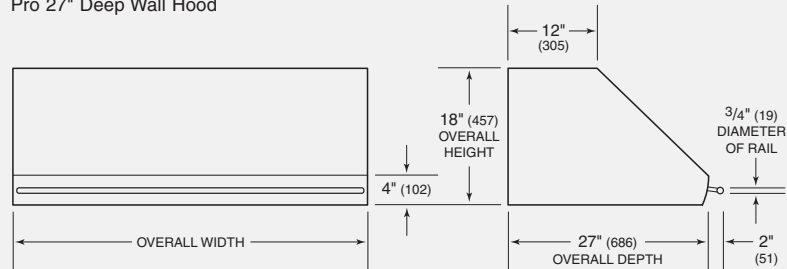

Pro 27" Deep Wall Hood—Rail (R) Model


Unit dimensions may vary by $\pm 1/8$ ".

Specifications

Exterior Finish	Classic Stainless Steel
Overall Widths	30", 36", 42", 48", 54", 60" and 66"
Overall Height	18"
Overall Depth (including rail)	27"
Bottom of Hood to Countertop	30" to 36"
Discharge	Vertical or Horizontal*
Duct Size	10" Round
Electrical Requirements	110/120 V AC 60 Hz, 15 amp dedicated circuit
Shipping Weight	92–163 lbs

*Horizontal discharge applications require a horizontal discharge kit.

Installation Specifications

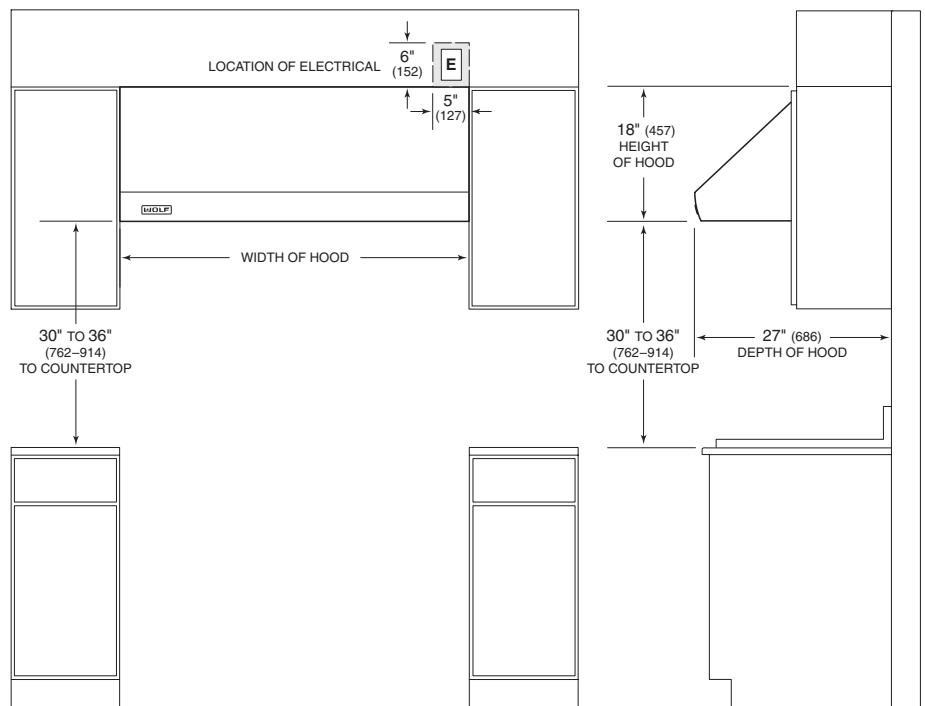

NOTE: Pro 27" (686) deep wall hoods have a vertical discharge. A horizontal discharge kit is available as a sales accessory.

Installation Notes

Pro 27" deep wall hoods are sold as a shell only. An internal, in-line or remote blower is required. For blower recommendations, visit our website, wolfappliance.com.

Pro 27" deep wall ventilation hoods are recommended for use with all Wolf cooking appliances.

Complete installation specifications can be found on our website, wolfappliance.com.

Dimensions in parentheses are in millimeters unless otherwise specified.