

RANGE COMPOSITION

Zanussi Professional have designed and produced a complete range of refrigerated tables, that combines the dual function of worktop and refrigerated table. This versatility allows notable savings in space whilst offering functional and modular solutions to kitchen requirements. The main benefit of this innovative new range is total flexibility: you have the possibility to compose your table to your exact personal requirements. You can order each individual unit and combine them together: structure, top, door, drawer and refrigeration unit. We offer a basic range of 38 models but the choice is infinite. The models detailed on this sheet are two and three full doors "Saladette" refrigerated tables.



290 - 440 LT

SALADETTE/REFRIGERATED TABLE **ZANUSSI** PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Constructed entirely in 304 AISI stainless steel.
- ◆ Feet in 304 AISI stainless steel, adjustable in height. Completely removable grid support structure in 303 AISI stainless steel.
- 50 mm high worktop slotted into place and easy to remove or to replace with a different type of top (supplied on request).
- ◆ Cutout on top, fitted with hinged lid and suitable for N. 3x1/3GN containers max. h=150 mm. N. 2 cells; N. 2 doors (model. TRN132AS) or for 4x1/3GN containers max. h=150 mm. N. 3 cells; N. 3 doors (model TRN183AS)
- ◆ High-density expanded polyurethane foam, 60 mm in thickness, with cyclopentane injection.
- ◆ Completely removable grid support structure in 303 AISI stainless steel.





CHARACTERISTICS	MODELS	
	TRN132AS 113209	TRN183AS 113822
Operating temperature - min/max °C	-2/10	-2/10
Operating mode	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	291	440
External dimensions - mm		
width	1274	1759
depth/with open doors	700, 1110	700, 1110
height	850	850
Internal dimensions - mm		
depth	580	580
height	530	530
Min/Max internal humidity - %	80/95	80/95
N° and type of door	2	3
Door hinges	1 Left+1 Right	1 Left+2 Right
N° and type of grids (included)	2, GN 1/1	3, GN 1/1
Compressor power - HP	1/4	1/4
N° defrost in 24 hrs.	3/15'	3/15'
Refrigerant type	R134a	R134a
Refrigerant quantity - g.	220	220
Refrigeration power - W	378	378
Power - kW		
installed-electric	0.34	0.34
Noise level - dBA	56	56
Net weight - kg.	119	142
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50
INCLUDED ACCESSORIES		
1/1 GN GREY "RILSAN" GRID	2	3

- ◆ Built-in refrigeration unit. Ventilated. Refrigerant R134a.
- ◆ Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas.
- ◆ The design of the refrigeration unit allows maximum usage of the available space in the compartment. It is also mounted on a pull-out system to facilitate maintenance and cleaning.
- ◆ The new central position of the refrigeration unit allows perfect air circulation in the different compartments and temperature uniformity.
- ◆ Suitable to operate in ambient temperatures up to +43°C. Temperature range: -2+10°C.
- ◆ Model TRN132AS is supplied with n. 2x1/1GN Rilsan grids and n. 8 pairs of runners and model TRN183AS supplied with n. 3x1/1GN Rilsan grids and n. 12 pairs of runners.
- ◆ CFC and HCFC free.

ACCESSORIES	MODELS	
	TRN132AS 113209	TRN183AS 113822
1/1 GN GREY "RILSAN" GRID	881435	881435
2 WHEELS FOR REFRIGERATORS/REFRIG. TABLES	880539	880539
HACCP ADV.CONN.10 UNITS-DIG.REF.(ID9XX)	880119	880119
HACCP ADV.CONN.80 UNITS-DIG.REF.(ID9XX)	880132	880132
HACCP ADV.CONN.PER UNIT-DIG.REF.(ID9XX)	880133	880133
KIT HACCP EKIS	922166	922166
LOCK FOR REFRIGERATED COUNTERS	881499	881499
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457



www.zanussiprofessional.com

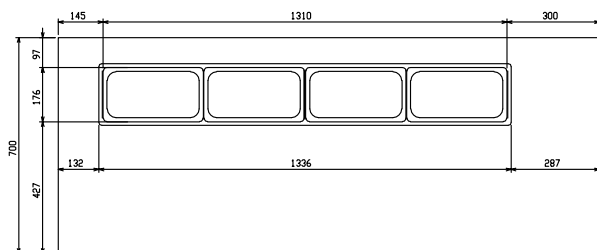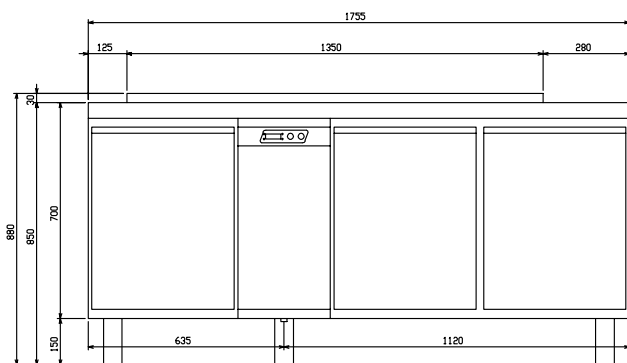

	TRN183AS 113822
D - Water drain	16mm
EI - Electrical connection	230 V, 1N, 50



www.zanussiprofessional.com