

# VSX-517-K

## 5-Channel A/V Receiver Featuring Sound Retriever



### PIONEER-EXCLUSIVE INNOVATIONS

- › **Phase Control** (Bass Management System Ensures Precision Low Frequency Output)
- › **Sound Retriever** for Improved Sound Quality of Compressed Music Files
- › **Pioneer Hybrid Amplifier Design**
- › **Front Stage Surround Advance**

### FEATURES FOR SUPERIOR SOUND QUALITY

- › Equal High Power for All Five Channels (110 Watts x 5, 1 kHz, 1.0 % THD, 8 ohms)
- › New Freescale 180MIPS Processing DSP
- › 192 kHz/24-bit DAC

### SURROUND SOUND TECHNOLOGIES

- › Built-in DTS® 96/24/Dolby® Pro Logic II Decoders
- › WMA9 Pro Decoder
- › Advanced Surround (14 modes, including Front Stage Surround Advance)
- › Dialogue Enhancement
- › Auto Surround
- › Stream Direct for Pure and Unprocessed Digital Sound

### ENHANCED CONVENIENCE

- › SR Remote
- › FL Dimmer (4 steps)
- › Quick Setup Operation
- › Tuner Edit Operation

### TERMINALS

- › 5.1-Channel Input
- › 3 Digital Inputs (2 Coaxial, 1 Optical)
- › Component Video Terminal (3 Inputs, 1 Output) Assignable
- › Audio (Tuner Included)/Video Inputs: 3A/3AV
- › Audio/Video Outputs: 1A/1AV + 1V
- › Large Speaker Terminals (FL/FR/C/SR/SL)


### SPECIFICATIONS

- › Power Requirements: AC 120 V/60 Hz
- › Power Consumption: 320 Watts
- › Standby Power Consumption: 0.5 Watts
- › **Dimensions** (W x H x D):  
16-9/16 x 6-1/4 x 13-7/8 inches (420 x 158 x 352.5 mm)
- › **Weight:** 19 lbs. 13 oz. (9.0 kg)

## 5-Channel A/V Receiver Featuring Sound Retriever

### CONNECTIONS

Rear Panel

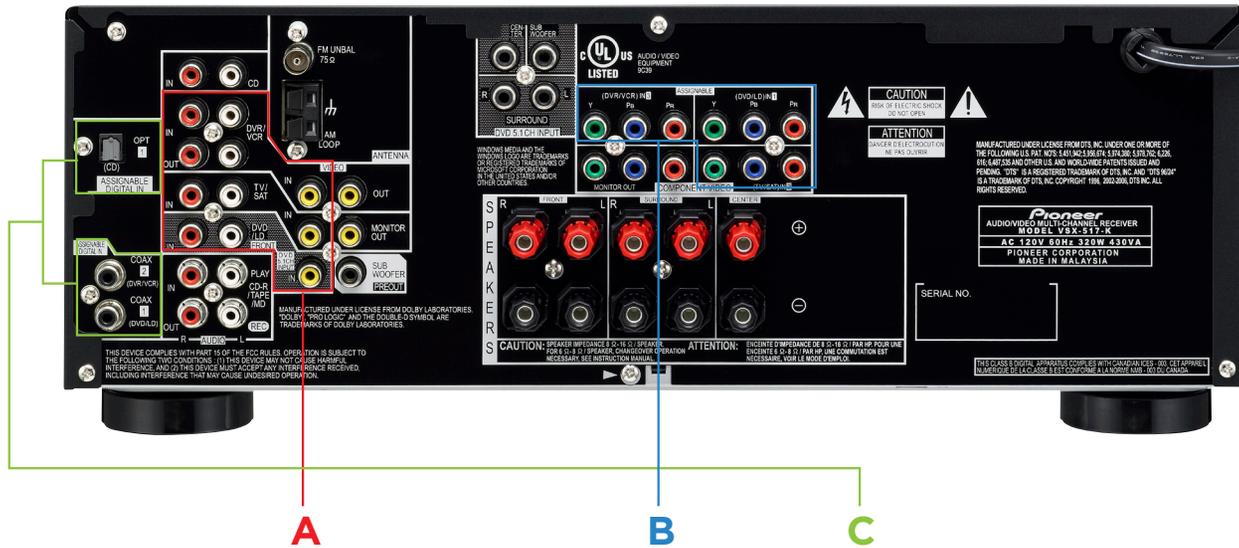

### CONNECTION DESCRIPTIONS

- A.** 3 Composite A/V Inputs for Cable TV/Satellite/VCR/ DVD-Player/DVD-Recorder
- B.** 3 Component Video Inputs for HD Video Sources – Cable/ Set-Top box/DVD/LD/DVD-Recorder
- C.** 3 Assignable Digital Inputs for DVD Player/Recorder/ Satellite/Cable/CD

Also available in silver



VSX-517-S

### INTEGRATED TECHNOLOGIES



- Specifications and design subject to modification without notice.
- Surround: 90 W per channel (20 Hz-20 kHz, 0.07 % THD, 8 ohms) (front); 90 W (20 Hz-20 kHz, 0.07 % THD, 8 ohms) (center); 90 W (20 Hz-20 kHz, 0.07 % THD, 8 ohms) (surround); 90 W (20 Hz-20 kHz, 0.07 % THD, 8 ohms) Measured pursuant to the Federal Trade Commission's Trade Regulation Rule on Power Output Claims for Amplifiers.
- The impedances indicated are actual values that speakers can present to an amplifier while playing back music. They do not refer to the nominal rated impedances of speakers you use.

- Stereo: Continuous average power output of 110 watts at 8 ohms, from 20 Hz to 20 kHz with no more than 0.2 % total harmonic distortion.
- PIONEER and the Pioneer Logo are registered trademarks of Pioneer Corporation.
- "DTS" is a registered trademark of DTS, Inc. and "DTS 96/24" is a trademark of DTS, Inc.
- Dolby, Pro Logic, Dolby Digital, and the double-D symbol are registered trademarks of Dolby Laboratories.
- Windows Media® Audio 9 Professional, Microsoft, Windows Media and the Windows logo are trademarks, or registered trademarks of Microsoft Corporation in the United States and/or other countries. Proprietary driver is required for WMA9 Pro playback on computer.

- ENERGY STAR® and the ENERGY STAR certification mark are registered U.S. marks.