

TX700

Well Built & Feature Rich



Brilliant Versatile Performer


The Optoma TX700 digital projector is a versatile and portable workhorse. Designed to excel in the most demanding big screen, multimedia environment, the TX700 will shine brightly in a wide range of applications. From the office to school and more, the TX700 is perfect for today and tomorrow's diverse applications.

- **Advanced DLP® technology**
- **Native XGA (1024 x 768) resolution** for sharp display
- **Bright 2200 lumens** for great image quality in a wide range of applications
- **Superior 2500:1 contrast ratio** for cinema quality images and crisp graphics
- **SXGA+ (1400 x 1050) capability** with high-end notebooks
- **HDTV compatible** (720p, 1080i)
- Convenient **DVI w/HDCP**, VGA-in, composite video and s-video inputs
- Weighs only **4.4 pounds**

Optoma

www.OptomaUSA.com

Advanced DLP® Technology

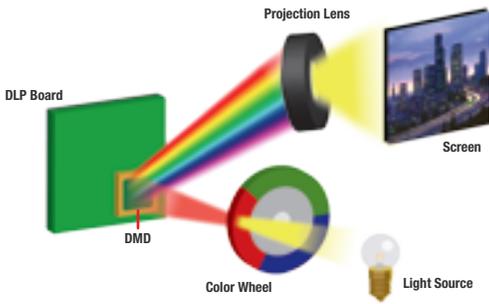

Enhanced Ventilation System



Remote Control



I/O Ports



Specifications

Display Technology:	Single 0.55" DDR DLP® Technology by Texas Instruments
Resolution:	XGA (1024 x 768)
Maximum Resolution:	SXGA+ (1400 x 1050)
Brightness (Typical):	2200 Lumens
Contrast Ratio:	2500:1 (Full On/Full Off)
Lamp Life (STD/ECO):	2000/3000 Hours
Lamp Type:	200W UHP
Throw Ratio:	1.93-2.13:1 (Distance/Width)
Image Size (Diagonal):	24.6" to 306" (0.6 to 7.7 m)
Noise Level:	28dB
Remote Control:	IR Remote
Monitor Loop Through:	D-Sub 15 VGA Output (Functional in Both Normal and Standby Modes)
Projection Distance:	3.9' to 39.3' (1.2 to 12 m)
Computer Compatibility:	XGA, SVGA, VGA, SXGA+ Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i)
Aspect Ratio:	4:3 Native, 5:4 and 16:9 Compatible
Projection Lens:	F=2.7~3.0, f=21.83~23.81 mm, 1.2:1 Manual Zoom and Focus
Audio:	One 2-Watt Mono Speaker
Weight:	4.4 lbs (1.99 kg)
Dimensions (W x H x D):	9" x 3.7" x 8.26" (230 x 95 x 210 mm)
Keystone Correction:	± 16° Vertical
Horizontal Scan Rate:	15 to 100 kHz
Vertical Refresh Rate:	56 to 85 Hz
Power Supply:	AC Input 100 - 240V, Auto-Switching Power Supply
Power Consumption:	265 Watts, <15W Standby Power
Operating Temperature:	Operating: 5 to 35°C, 80% Humidity (Max) Storage: -20 - 60°C, 80% Humidity (Max)
Displayable Colors:	16.7 Million, 256 Shades of Gray
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
User Controls:	Advanced Adjustability Options through the On-Screen Display
Security:	One Kensington® Lock Port
I/O Connectors:	DVI w/HDCP, VGA-In, S-Video, Composite Video, VGA-Out, Audio-In, RS-232
Standard Accessories:	AC Power Cord, VGA to VGA Cable, Composite Video Cable, Lens Cap, Remote Control, Batteries for Remote, Carrying Case, Quick Start Guide, User's Manual and Warranty Card
Optional Accessories:	Ceiling Mount, 15-pin to 3 RCA Component/HDTV Adapter, S-Video Cable, Audio-Out Adapter and GrayWolf™ Series Screens
Warranty:	3 Years Optoma Express Replacement Service, 1 Year on Lamp
UPC:	796435 11 121 2

Data-700-001



Available from:

