

Revolabs Fusion™ Microphone System — Sony XG-80 Setup Guide

This setup guide will guide you through the steps needed to properly connect a Revolabs Fusion Microphone System to a Sony XG-80 video codec.

Note: *It is important to carefully follow these instructions in order and completely. Otherwise your Fusion Microphone System and/or the video codec may not function properly. Please read through these instructions completely before proceeding. Contact Revolabs technical support if you have any questions.*


Requirements for connecting systems:

1. Revolabs Fusion 4 or 8 channel Microphone System
2. Sony XG-80 video codec
3. QTY 1 Female XLR—1/8" mono male cable* (i.e. Calrad 10-144)
4. QTY 1 RCA male — RCA male cable
5. Amplified Speakers

* Optional Item

Connecting the Cables

1. Connect a Female XLR – 1/8" audio cable between the XLR "CONF OUT" port on the Fusion and the "MIC 1" port on the Sony XG-80.
2. Connect a Male RCA-RCA audio cable between the "CONF IN" port on the Fusion and the L "AUDIO OUT" port on the XG-80.
3. Connect a Male RCA audio cable between the "Room Out" port on the Fusion and the Amplified Speakers.

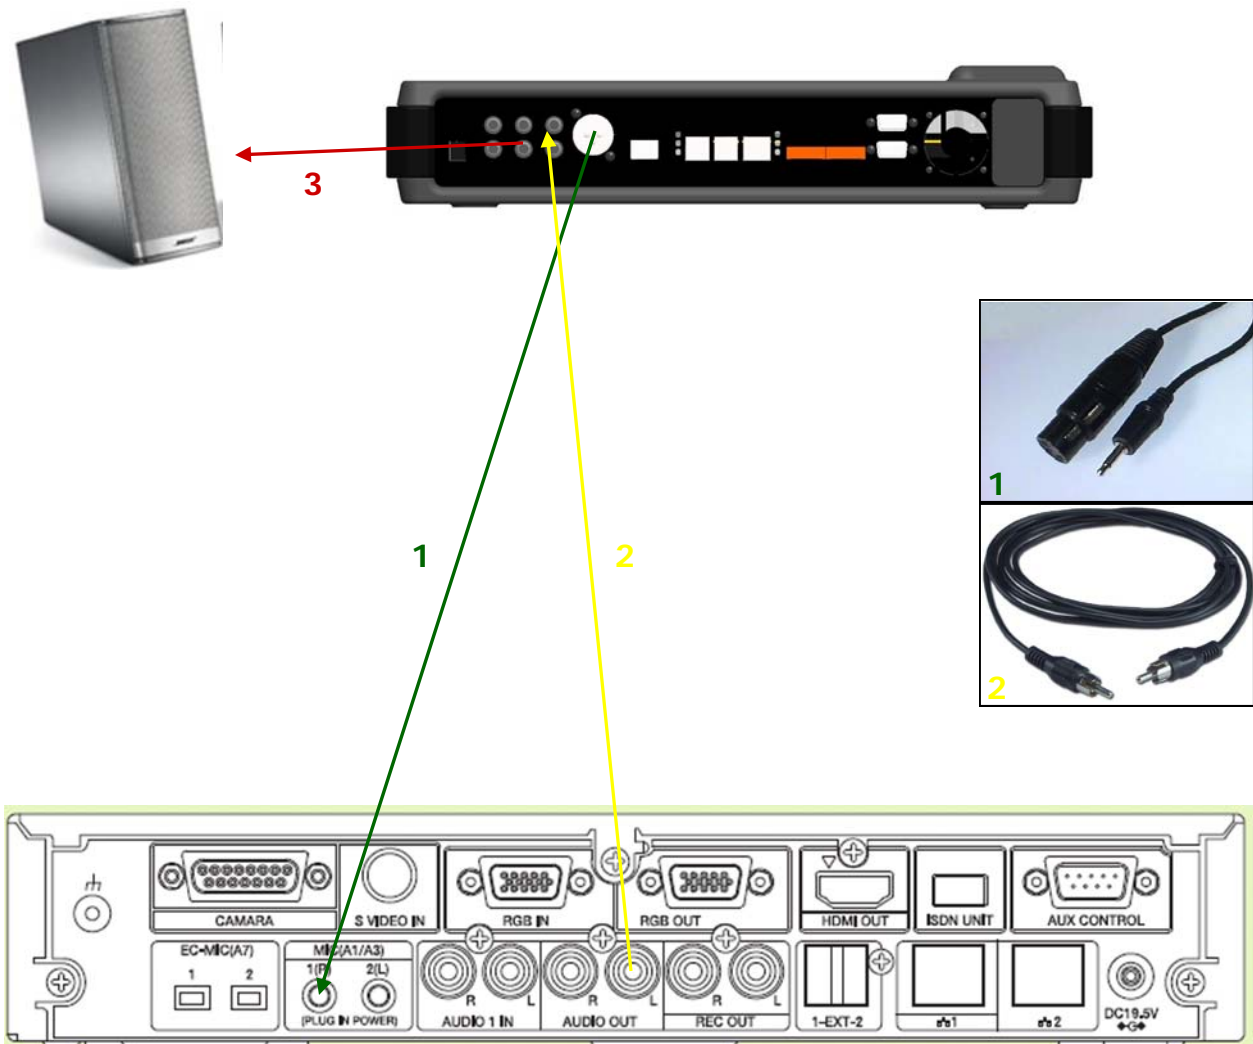

NOTE: You must use your Fusion remote control to control the room volume for both the audio and video conference calls. Adjusting the volume in the video codec will cause echo.

Configuring the Sony XG-80 Video Codec

1. Push the TOOLS button on the remote control
2. Select SETUP
3. Select AUDIO 1
4. Select AUDIO INPUT as MIC
5. Verify that Mic (A1/A3) has a checkmark
6. Turn ECHO CANCELLER to OFF
7. Verify INPUT as MONAURAL
8. Increase Sony volume level on remote to maximum

NOTE: You must use your Fusion remote control to control the room volume for both the audio and video conference calls. Adjusting the volume in the video codec will cause echo.