

# New Holland 82LB and 84LB Loader Specifications




82LB 84LB

## KEY LOADER DIMENSIONS

	82LB*	84LB*
A Maximum lift height to pivot pin, in. (mm)	143.8 (3652)	157.8 (4008)
B Maximum lift height under level bucket, in. (mm)	135.4 (3439)	148.8 (3780)
C Clearance with bucket dumped, 45 degree, in. (mm)	110.3 (2802)	123.8 (3144)
D Reach (from tire), max lift height, bucket 45 degree, in. (mm)	41.7 (1059)	61.7 (1567)
E Maximum dump angle	60°	75°
F Reach with bucket on ground, in. (mm)	90 (2285)	122 (3105)
G Maximum rollback angle	28°	20°
H Digging depth, in. (mm)	3.2 (81.2)	4.2 (106.6)
J Maximum bucket height (standard bucket), in. (mm)	176.1 (4470)	190.1 (4830)
R Rollback angle at full height	40°	62°
Lift capacity to max height at pivot, lbs.	6,400	6,150
Lift capacity to max height 31.5 in. ahead of pivot, lbs.	4,050	4,400
Bucket rollback force at ground 31.5 in. ahead of pivot, lbs.	6,440	12,000

\*Values assuming Goodyear Versa Torque 480/85R34 tires and 1.5 cu.yd. bucket

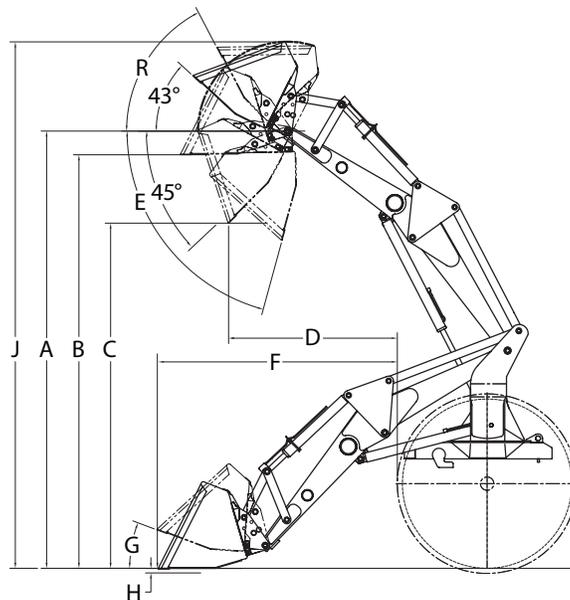

Visit our Web site at [www.newholland.com/na](http://www.newholland.com/na). Or, call toll-free **866-NEW-HLND (866-639-4563)**.

Design, materials and/or specifications are subject to change without notice and without liability therefor. Specifications are applicable to units sold in Canada, the United States, its territories and possessions, and may vary outside these areas.



Safety begins with a thorough understanding of the equipment. Always make sure you and your operators read the Operator's Manual before using the equipment. Pay close attention to all safety and operating decals and never operate machinery without all shields, protective devices and structures in place.