




## PCI Fax Modem 56K

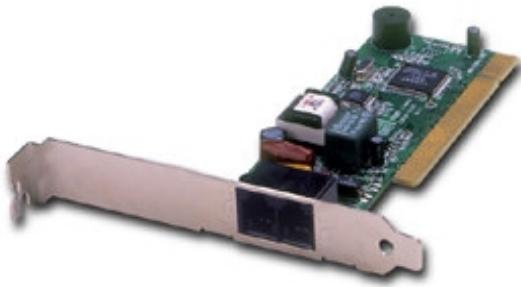

- \* PCI 2.1 Compliant Plug & Play interface
- \* Windows XP, Windows ME, Windows 2000, Windows 98, Windows 95/OSR2, Windows NT 4.0
- \* Hayes Compatible AT Commands
- \* Auto Speed/Mode Selection

### SPECIFICATIONS

#### Data

K56flex, V.90, V.92, V.34bis, V.34, V.32bis, V.32, V.22bis, V.22, and V.21, Bell 212A and Bell 103

#### Fax

V.17, V.29, V.27ter, and V.21 channel 2 Group 3 send  
And receive facsimile Error Correction V.42 and MNP2-4 Data  
Compression V.42bis and MNP 5

### Communication software compatible commands

- Hayes compatible enhanced "AT" command set
- Fax Service Class 1 commands

### Built-in DTE interface

- DTE speed up to 115,200 bps
- 16C550 UART interface

### SYSTEM REQUIREMENTS

- \* A telephone line with RJ-11 jack
- \* A CD-ROM drive
- \* Windows98/ ME/ 2000/XP or Windows NT pre-installed