

Model # 1304TW

Double Snap N Go[®]

Instruction Manual

Double Snap N Go®

U.S. PATENT#6,189,914, 6,302,412 5,499,831
PATENT PENDING 07.03

⚠ WARNING: Please follow all of these instructions to ensure the safety of your children. Keep these instructions for future reference.

⚠ WARNING: Failure to follow these instructions could result in serious injury or death. Avoid serious injury from falling or sliding out. Always use the safety belts and insure that the children are properly positioned according to these instructions.

⚠ WARNING: Never leave children unattended.


- * Purses, shopping bags, parcels, diaper bags or accessory items may change the balance of the stroller and cause hazardous unstable conditions.
- * The maximum weight that can be carried in the basket is 5 lbs. The maximum weight for the parent tray is 3 lbs.
- * Be certain the stroller is fully erect and latched in the open position before allowing the children near the stroller.
- * Excessive weight may cause hazardous unstable conditions to exist.
- * Use of the stroller with two (2) children weighing more than 25 pounds each, or children totaling more than 50 pounds, will cause excessive wear and stress on the stroller and may cause a hazardous unstable condition to exist.
- * DO NOT use the stroller on stairways or escalators.
- * Never allow your stroller to be used as a toy
- * To clean use only mild household soap or detergent and warm water on a sponge or clean cloth.
- * Check your stroller for loose screws, worn parts, torn material or stitching on a regular basis. Replace or repair parts as needed
- * Discontinue use of stroller should it malfunction or become damaged. Please contact our customer service Parts Hotline to arrange for repair or obtain replacement parts.

Please: If you experience any difficulty with the use of our product or have a question regarding these instructions, please contact our Customer Service Department at (800) 328-7363 between the hours of 8:00 and 4:30 Pacific Coast Time. Please do not return the product to the store as once it is returned it cannot be re-sold and the materials and energy used to make it are wasted.

Baby Trend
1567 S. Campus Ave.
Ontario, CA 91761

Parts Hotline:
(800) 328-7363
8:00 am and 4:30 pm Pacific Coast Time

PARTS

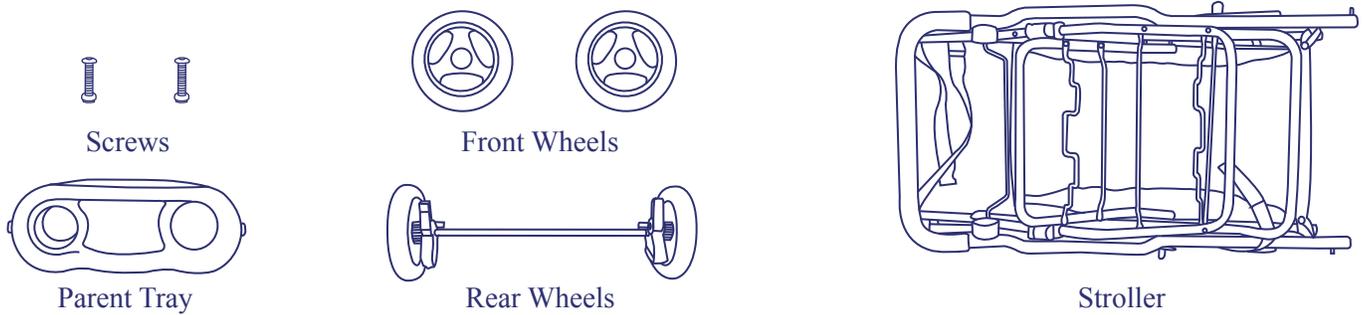

ASSEMBLING

TO ENSURE SAFE OPERATION OF YOUR STROLLER, PLEASE FOLLOW THESE INSTRUCTIONS CAREFULLY. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

ASSEMBLY:

- Remove stroller from box. The front wheels, rear wheels, parent tray, and support bars specific to your infant car seats need to be installed prior to use.
- To attach the front wheels, unfold stroller as described in the section following. See figure 1.

Lean the stroller backwards so that it rests on the handle and rear frame tubes and the front wheel tubes are pointing upward.

Position the front wheel assembly at the front tube such that the large hole in the swivel assembly will slide onto the front tube. Push each front wheel assembly onto the front tube being careful that wheel assembly locks onto the front leg. Pull on the wheel assembly to ensure that it is securely attached to the stroller. Please see figure 2.

- Lean the stroller forward to rest on the front wheels. To attach the rear wheels, position the rear axle and wheel assembly such that the brake levers are facing to the rear of the stroller. Press the rear wheel assembly onto the rear frame tubes being careful that the push buttons on the forward side of each rear tube engage the hole on the forward side of each rear wheel housing. Pull on the rear wheel assembly to ensure that it is securely attached to the stroller. Please see figure 3a.

Ensure that the wheels are firmly locked into place. Do Not use the stroller if the wheels are not locked into place, but rather contact our customer service department immediately at (800) 328-7363, between the hours of 8:00am and 4:30pm PCT, for assistance

- To attach the storage basket, slide the U-shaped basket tube into the tubes at the rear of the stroller. Push the tube in until the snap button pops through the hole on the female tube. Please see figure 3b.
- To attach the parent tray, position the tray so that the warning statement on the inside can be read from the normal position of pushing the stroller. Push the tray male end fittings into the plastic female fittings on the inside of the stroller handle. Check that the tray is securely latched in place. Please see figure 4. To remove parent tray, pull upward on the tray.




Fig. 1




Fig. 2




Fig. 3a




Fig. 3b




Fig. 6




Fig. 5




Fig. 4

⚠ WARNING: Do not place hot liquids in the parent tray. Hot liquids can burn your child. Do not place more than 3 pounds in the tray as it may cause a hazardous unstable condition to exist.

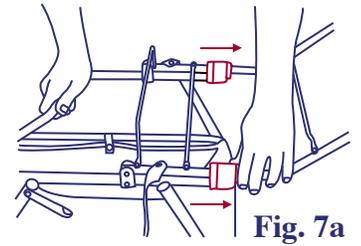


Fig. 7a

Your stroller is now ready to use

BRAKES

⚠ WARNING: Always set brakes when the stroller is not being pushed so that the stroller will not roll away. Never leave stroller unattended on a hill or incline as the stroller may slide down the hill.

- To engage brakes, apply light downward pressure to the brake lever located on each rear wheel. The stroller may require slight forward or rearward movement in order to line up the teeth on the brake with the each wheel brake cluster. See figure 5. Check that the stroller will not move and that the brakes are properly applied. To release, gently lift up on the brake lever. See figure 6.




Fig. 7b

TO FOLD STROLLER:

Do Not allow children near stroller while folding.

- The front section of the frame may be folded back to reduce the folded size of the stroller. To fold the front frame, slide the plastic fittings forward while lifting upward on the frame. Rotate the front frame backwards to rest on the rear portion of the frame. Please see figure 7a and 7b.
- Lift upward on the secondary safety lock on the left side of the stroller just above the rear wheel. Please see figure 8. Lift upward on the spring loaded automatic latch on the right side of the stroller just above the wheel while pushing forward on the handle. Please see figure 9. Once the stroller begins to fold, release the latch and pull upward on the front of the stroller until the stroller is folded. Please see figure 10. Secure the stroller in the folded position by latching the fold latch, located on the right side of the stroller handle, over the extended rivet on the front leg. Please see figure 11.




Fig. 8




Fig. 9

TO UNFOLD STROLLER:

Do Not allow children near stroller while unfolding.

- Release the folding latch, which is located on the right side. See figure 11.
- Lift up on the stroller handle with both hands until the stroller frame is erect and locked in the open position. See figure 10. The stroller has a spring-loaded latch on the right side of the frame. Test that latch is fully engaged. **Engage the manual secondary safety lock** on the left side of the frame prior to placing your car seats on the stroller. See figure 8.
- Extend the front frame by rotating it forward. See figure 7b. Check that the two plastic fittings both latch onto the front upper tube of the stroller frame. See figure 7a.

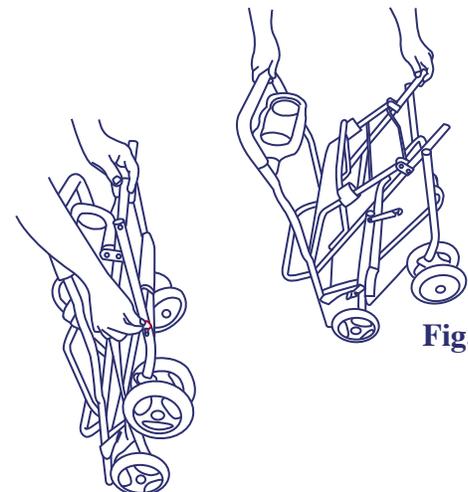


Fig. 10

Fig. 11

TO ADAPT THE STROLLER TO YOUR INFANT CAR SEATS:

- Please see Car Seat Chart and description of attachment cross bars following to determine the proper configuration of the Double Snap n Go® for your Infant Car Seats. See the page following that corresponds with your brand of infant car seat for use with your car seat.

⚠ WARNING: Avoid serious injury from falling or sliding out. Always use the Infant Car Seat harness.




**IF YOU EXPERIENCE ANY DIFFICULTY IN USING THIS PRODUCT,
PLEASE CONTACT OUR CUSTOMER SERVICE DEPARTMENT AT (800) 328-7363
BETWEEN THE HOURS OF 8:00AM AND 4:30PM PACIFIC COAST TIME FOR ASSISTANCE.**

POSITION TABLE


FRONT

CAR SEAT	BAR 1	POSITION	BAR 2	POSITION	STRAP POSITION
Century® Vante	C & B1 "down"	2	B1	7	6
Costco® Designer Opus 35	B1 Down w/sleeve	4	B1 "down"	5	3
Evenflo® Cozy Carry	C	4	D "down"	5	6
Evenflo® On My Way	B1	4	C	6	5
Graco®	A1	1	D	7	5
Peg Perego® Primo Viaggio	A1	4	C	5	3
Baby Trend® Latch-Loc	BT1	a	C	7	5

Front Car Seat Bars

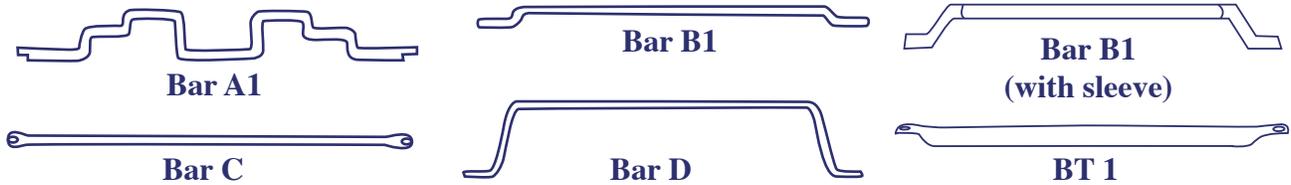


FRONT CAR SEAT BAR POSITION

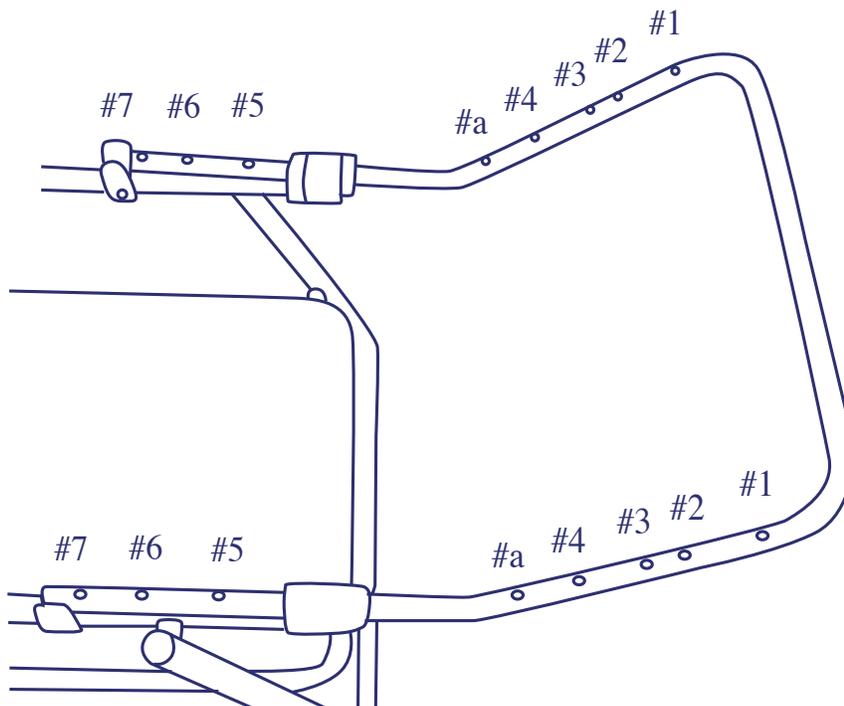


REAR

CAR SEAT	BAR 1	POSITION	BAR 2	POSITION	STRAP POSITION
Century® Vante	NO	NO	D	5	4
Costco® Designer Opus 35	B2	3	C	4	1
Evenflo® Cozy Carry	B2	2	B1 "down"	4	5
Evenflo® On My Way	B2 "down"	3	NO	NO	5
Graco®	A2	2	NO	NO	5
Peg Perego® Primo Viaggio	A2	3	B1 "down"	4	5
Baby Trend® Latch-Loc	BT2	b	NO	NO	5

Rear Car Seat Bars

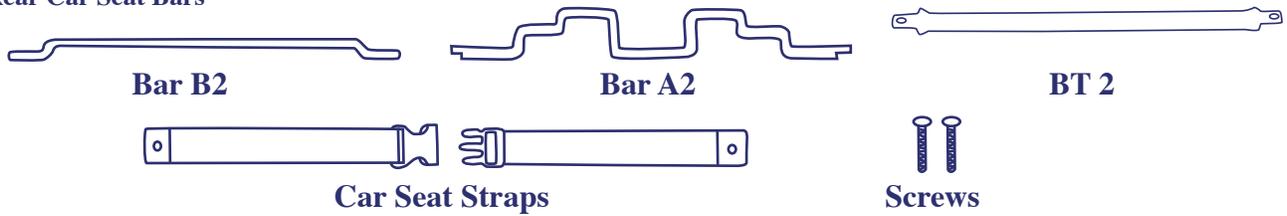

BACK CAR SEAT BAR POSITION

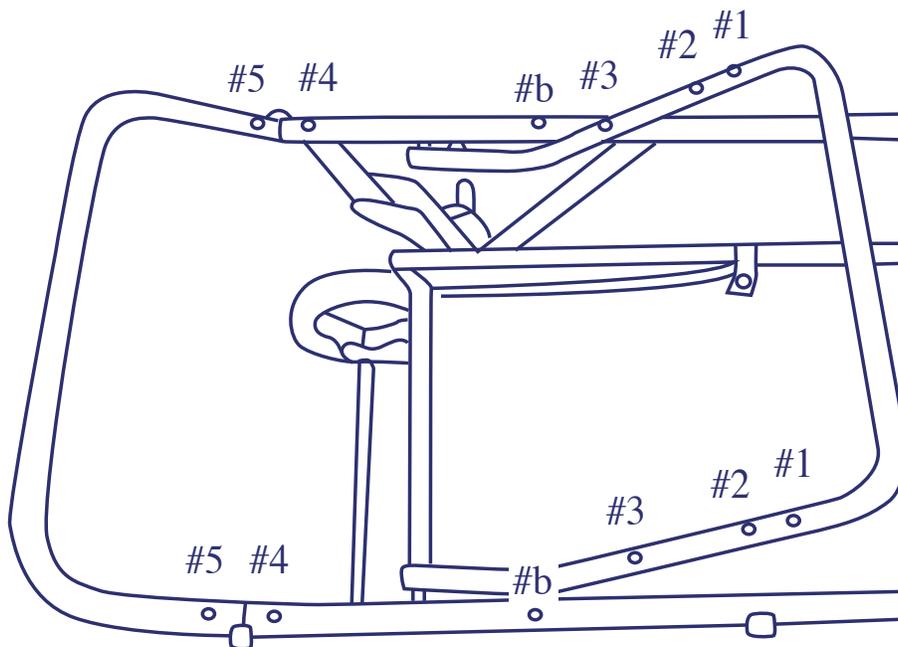

Installation Instructions for Century® Vante

The Double Snap-N-Go® will accommodate the Century® Vante Infant Car Seat. Please follow the following instructions for proper installation of the Vante.

Front Seat:

1. Remove (unscrew) Crossbars A1, B1, C and D from the Double Snap-N-Go® frame. Retain the screws you remove.
2. Attach Crossbar C on top of Crossbar B1, with the bent side of B1 facing downward, to the Double Snap-N-Go® frame using the two holes labeled #2. Use the two long screws provided separately. Please see figure 1.
3. Attach Crossbar B1, taken from the rear of the Double Snap-N-Go® frame, to the Double Snap-N-Go® frame using the two holes labeled #7. Use the two screws that you removed in step 1. Please see figure 1.

Rear Seat:

1. Remove (unscrew) Crossbars A2, B2, and B1 from the Double Snap-N-Go® frame. Remove the Car Seat Straps from the Double Snap-N-Go® frame. Retain the screws you remove.
2. Attach Crossbar D, removed in the Front Seat step 1 above, to the Double Snap-N-Go® frame using the two holes labeled #5. Use the two screws that you removed in step 1. Please see figure 2.
3. Attach both Car Seat Straps to the Double Snap-N-Go® frame using the two holes labeled #4. Use the two screws that you removed in step 1. Please see figure 2.

Insertion of the Century® Vante Infant Car Seat

1. With one hand grasp the car seat handle (in its upright, carrying position) and gently place the seat, so that the baby faces the rear of the Double Snap-N-Go®, onto the Double Snap-N-Go® so that the large groove on the seat bottom, nearest the head-end of the seat, hooks over the Crossbar C/B1 combination in the front position or hooks over the top section of the Double Snap-N-Go® frame in the rear position. Check that the seat locked onto the Crossbar or frame. See Figure 3. **FOR SAFE OPERATION, IT IS VERY IMPORTANT THAT THE SEAT LOCK SECURELY ONTO THE CROSSBAR OR FRAME.**
2. Feed the Car Seat Straps through the auto belt slots on the infant car seat as shown in Figure 4 and snap the two buckles together. The first time you do this, you will need to adjust the length of the strap for a tight fit around the car seat. **FOR SAFE OPERATION, IT IS VERY IMPORTANT THAT THE CAR SEAT STRAP IS ALWAYS TIGHTLY FASTENED OVER THE CAR SEAT.**
3. Test for secure installation by moving the car seat in all directions. The car seat should be securely attached to the Double Snap-N-Go®.

Removal of the Century® Vante Infant Car Seat

1. Unlock the Car Seat Strap and remove from over the infant car seat.
2. With one hand, grasp the car seat handle (in its upright, carrying position) and with your other hand squeeze the handle on the back of the car seat and lift the car seat upward from the Double Snap-N-Go® frame. See Figure 5.

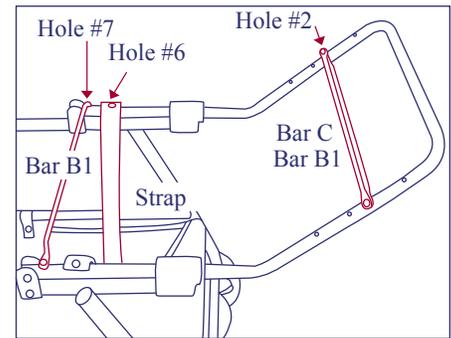


Fig. 1

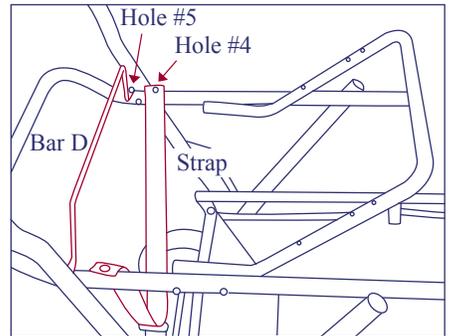


Fig. 2

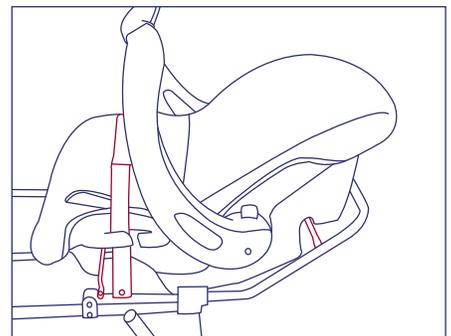


Fig. 3

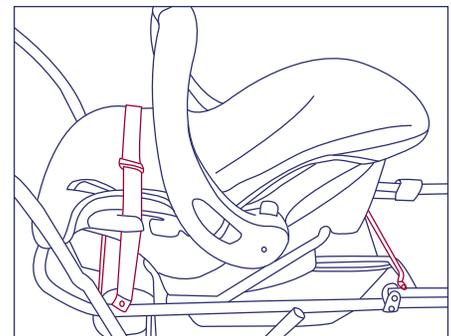


Fig. 4

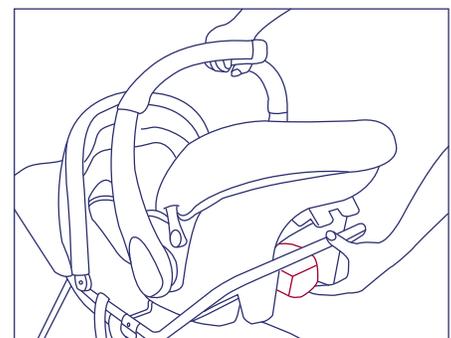


Fig. 5

Century® and Vante are the trademarks of their owners. They are not associated with Baby Trend and no approval or endorsement is implied.

Installation Instructions for Cosco® Designer/Opus 35

The Double Snap-N-Go® will accommodate the Cosco® Designer/Opus 35 Infant Car Seat. Please follow these instructions for proper installation of the Cosco®.

Front Seat:

1. Remove (unscrew) Crossbars A1, C and D from the Double Snap-N-Go® frame. Leave Crossbar B1 in hole labeled #4. Remove the Car Seat Straps from the Double Snap-N-Go® frame. Retain the screws you remove.
2. Attach Crossbar B1 (removed from the rear section of the Double Snap-N-Go® frame), so that the bent section faces down, to the Double Snap-N-Go® frame using the two holes labeled #5. Use the two screws that you removed in step 1. Please see figure 1.
3. Attach both Car Seat Straps to the Double Snap-N-Go® frame using the two holes labeled #3. Use the two screws that you removed in step 1. Please see figure 1.

Rear Seat

1. Remove (unscrew) Crossbars A2 and B1 from the Double Snap-N-Go® frame. Remove the Car Seat Straps from the Double Snap-N-Go® frame. Retain the screws you remove.
2. Attach Crossbar C (removed from the front section of the Double Snap-N-Go® frame) to the Double Snap-N-Go® frame using the two holes labeled #4. Use the two screws that you removed in step 1. Please see figure 2.
3. Attach both Car Seat Straps to the Double Snap-N-Go® frame using the two holes labeled #1. Use the two screws that you removed in step 1. Please see figure 2.

Insertion of the Cosco® Designer/Opus 35 Infant Car Seat

1. With one hand grasp the car seat handle (in its upright, carrying position) and with your other hand squeeze the handle on the back of the car seat and gently place the seat, so that the baby faces the rear, onto the Double Snap-N-Go® so that the rear small grooves on the seat bottom hook over Crossbar B1 for the front position or Crossbar C for the rear position. Release the handle and check that the seat locked onto the bar. See Figure 3. **FOR SAFE OPERATION, IT IS VERY IMPORTANT THAT THE REAR LATCHES OF THE SEAT LOCK SECURELY ONTO THE CROSSBAR.**
2. Feed the Car Seat Straps through the slots found on the rear of the Car Seat shell as shown in figure 4. Buckle the two straps together. The first time you do this, you will need to adjust the length of the strap for a tight fit around the car seat. Please see figure 4.
3. Test for secure installation by moving the car seat in all directions. The car seat should be securely attached to the Double Snap-N-Go®.

Removal of the Cosco® Designer/Opus 35 Infant Car Seat

1. Unlock the Car Seat Strap and remove.
2. With one hand, grasp the car seat handle (in its upright, carrying position) and with your other hand squeeze the handle on the back of the car and lift the car seat upward from the Double Snap-N-Go®. See Figure 5.

Cosco® and Designer/Opus 35 are the trademarks of their owners. They are not associated with Baby Trend and no approval or endorsement is implied.

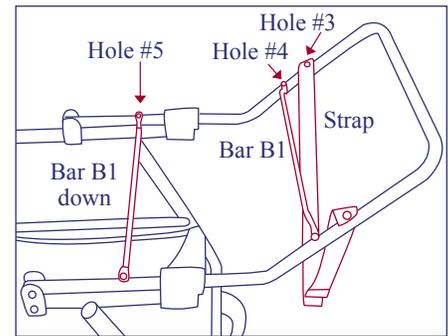


Fig. 1

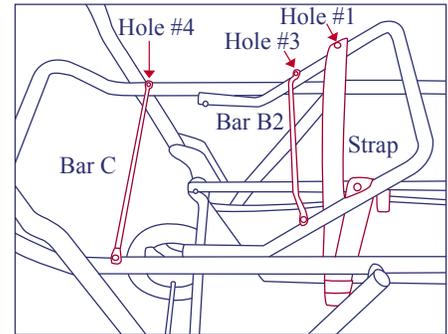


Fig. 2

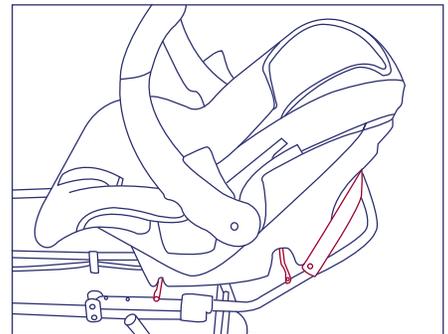


Fig. 3

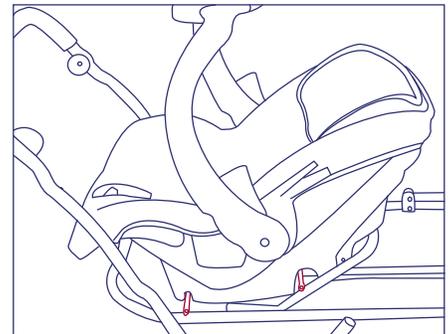


Fig. 4

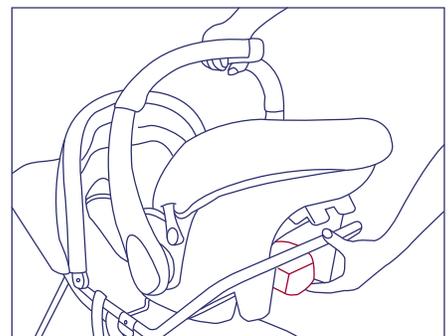


Fig. 5

Installation Instructions for Evenflo® Cozy Carry

The Double Snap-N-Go® will accommodate the new Evenflo® Cozy Carry Infant Car Seat. Please follow the following instructions for proper installation of the Cozy Carry.

Front Seat:

1. Remove (unscrew) Crossbars A1, B1, C, and D from the Double Snap-N-Go® frame. Retain the screws you remove.
2. Attach Crossbar C to the Double Snap-N-Go® frame using the two holes labeled #4 as shown in figure 1. Use the two screws that you removed in step 1.
3. Attach Crossbar D, so that the bent section faces down, to the Double Snap-N-Go® frame using the two holes labeled #5 as shown in figure 1. Use the two screws that you removed in step 1.

Rear Seat:

1. Remove (unscrew) Crossbars A2, B2, and B1 from the Double Snap-N-Go® frame. Retain the screws you remove.
2. Attach Crossbar B2 to the Double Snap-N-Go® frame using the two holes labeled #2 as shown in figure 2. Use the two screws that you removed in step 1.
3. Attach Crossbar B1, so that the bent section faces down, to the Double Snap-N-Go® frame using the two holes labeled #4 as shown in figure 1. Use the two screws that you removed in step 1.

Insertion of the Evenflo® Cozy Carry Infant Car Seat

1. With one hand grasp the car seat handle (in its upright, carrying position) and gently place the seat, so that the baby faces the rear of the Double Snap-N-Go®, onto the Double Snap-N-Go® so that the large groove on the seat bottom, nearest the head-end of the seat, hooks over Crossbar C1 in the front or crossbar B2 in the rear. Check that the seat locked onto the Crossbar. See Figure 3. **FOR SAFE OPERATION, IT IS VERY IMPORTANT THAT THE SEAT LOCK SECURELY ONTO THE CROSSBAR.**
2. Loop the two ends of the Car Seat Strap (attached to the Double Snap-N-Go® frame) over the car seat, half way between the handle and the foot-end of the seat, and snap the two buckles together (see Figure 4). The first time you do this, you will need to adjust the length of the strap for a tight fit around the car seat. **FOR SAFE OPERATION, IT IS VERY IMPORTANT THAT THE CAR SEAT STRAP IS ALWAYS TIGHTLY FASTENED OVER THE CAR SEAT.**
3. Test for secure installation by moving the car seat in all directions. The car seat should be securely attached to the Double Snap-N-Go®.

Removal of the Evenflo® Cozy Carry Infant Car Seat

1. Unlock the Car Seat Strap and remove from over the infant car seat.
2. With one hand, grasp the car seat handle (in its upright, carrying position) and with your other hand squeeze the red handle on the back of the car seat and lift the car seat upward from the Double Snap-N-Go® frame. See Figure 5.

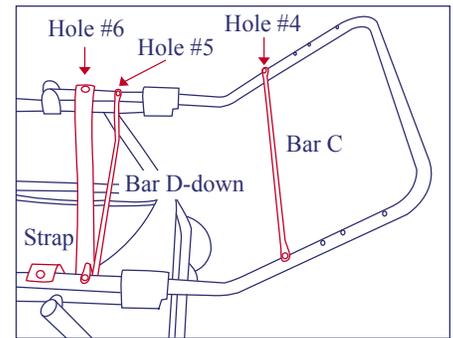


Fig. 1

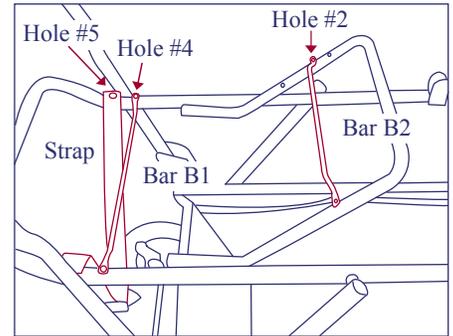


Fig. 2

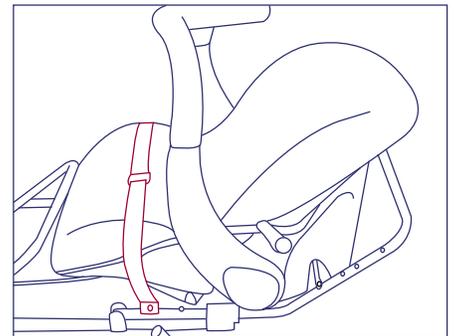


Fig. 3

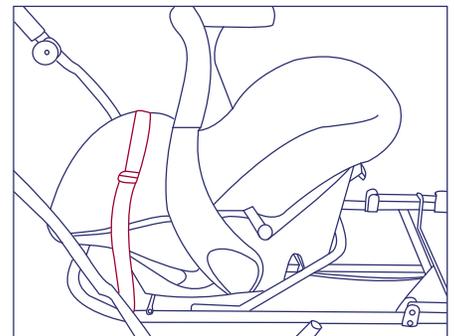


Fig. 4

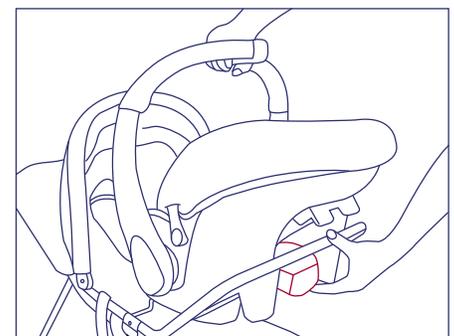


Fig. 5

Evenflo® and Cozy Carry are the trademarks of their owners. They are not associated with Baby Trend and no approval or endorsement is implied.

Installation Instructions for Evenflo® On My Way

The Double Snap-N-Go® will accommodate the Evenflo® On My Way Infant Car Seat. Please follow the following instructions for proper installation of the On My Way.

Front Seat:

1. Remove (unscrew) Crossbars A1, C, B1 and D from the Double Snap-N-Go® frame. Remove the Car Seat Straps from the Double Snap-N-Go® frame. Retain the screws you remove.
2. Attach Crossbar B1 with sleeve to the Double Snap-N-Go® frame using the two holes labeled #4 as shown in figure 1. Use the two screws that you removed in step 1.
3. Attach Crossbar C to the Double Snap-N-Go® frame using the two holes labeled #6 as shown in figure 1. Use the two screws that you removed in step 1.
4. Attach the Car Seat Straps to the Double Snap-N-Go® frame using the two holes labeled 5 as shown in figure 1. Use the two screws that you removed in step 1.

Rear Seat:

1. Remove (unscrew) Crossbars A2, B2, and B1 from the Double Snap-N-Go® frame. Retain the screws you remove.
2. Attach Crossbar B2, so that the bent section faces down, to the Double Snap-N-Go® frame using the two holes labeled #3 as shown in figure 2. Use the two screws that you removed in step 1.

Insertion of the Evenflo® On My Way Infant Car Seat

1. With one hand grasp the car seat handle (in its upright, carrying position) and gently place the seat, so that the baby faces the rear of the Double Snap-N-Go®, onto the Double Snap-N-Go® so that the large groove on the seat bottom, nearest the head-end of the seat, hooks over Crossbar C in the front or crossbar B2 in the rear. Check that the seat locked onto the Crossbar. See Figure 3. **FOR SAFE OPERATION, IT IS VERY IMPORTANT THAT THE SEAT LOCK SECURELY ONTO THE CROSSBAR.**
2. Feed the Car Seat Straps through the auto belt slots on the infant car seat as shown in Figure 4 and snap the two buckles together. The first time you do this, you will need to adjust the length of the strap for a tight fit around the car seat. **FOR SAFE OPERATION, IT IS VERY IMPORTANT THAT THE CAR SEAT STRAP IS ALWAYS TIGHTLY FASTENED OVER THE CAR SEAT.**
3. Test for secure installation by moving the car seat in all directions. The car seat should be securely attached to the Double Snap-N-Go®.

Removal of the Evenflo® On My Way Infant Car Seat

1. Unlock the Car Seat Strap and remove from over the infant car seat.
2. With one hand, grasp the car seat handle (in its upright, carrying position) and with your other hand squeeze the red handle on the back of the car seat and lift the car seat upward from the Double Snap-N-Go® frame. See Figure 5.

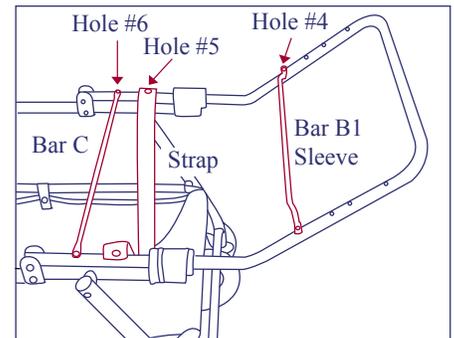


Fig. 1

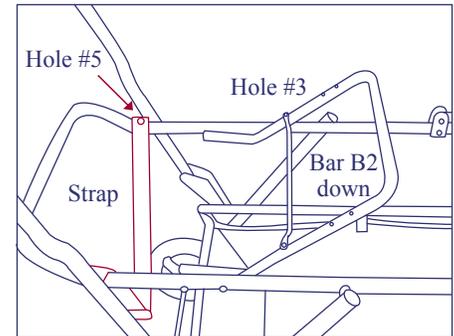


Fig. 2

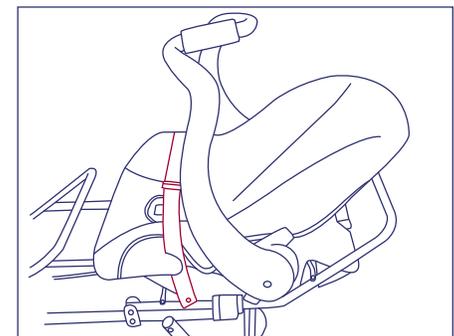


Fig. 3

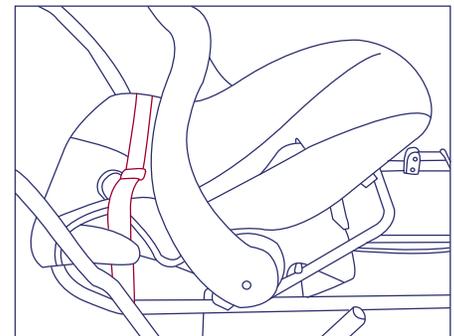


Fig. 4

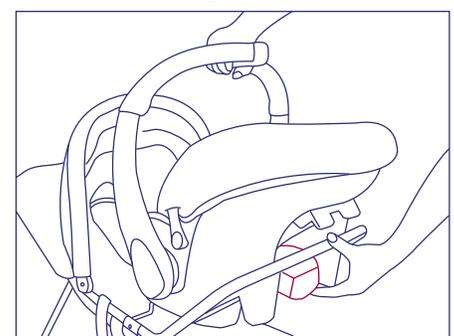


Fig. 5

Evenflo® and On My Way are the trademarks of their owners. They are not associated with Baby Trend and no approval or endorsement is implied.

Installation Instructions for Graco® Snug Ride

The Double Snap-N-Go® will accommodate the Graco® Snug Ride Infant Car Seat. Please follow the following instructions for proper installation of the Snug Ride.

Front Seat:

1. Remove (unscrew) Crossbars B1, and C from the Double Snap-N-Go® frame. Remove the Car Seat Straps from the Double Snap-N-Go® frame. Retain the screws you remove.
2. Attach the Car Seat Straps to the Double Snap-N-Go® frame using the two holes labeled #5 as shown in figure 1. Use the two screws that you removed in step 1.

Rear Seat:

1. Remove (unscrew) Crossbars B2 and B1 from the Double Snap-N-Go® frame. See figure 2.

Insertion of the Graco® Snug Ride Infant Car Seat

1. With one hand grasp the car seat handle (in its upright, carrying position) and gently place the seat, so that the baby faces the rear of the Double Snap-N-Go®, onto the Double Snap-N-Go® so that the large groove on the seat bottom, nearest the head-end of the seat, hooks over Crossbar A1 in the front or crossbar A2 in the rear. Check that the seat locked onto the Crossbar. See Figure 3. **FOR SAFE OPERATION, IT IS VERY IMPORTANT THAT THE SEAT LOCK SECURELY ONTO THE CROSSBAR.**
2. Feed the Car Seat Straps through the auto belt slots on the infant car seat as shown in Figure 4 and snap the two buckles together. The first time you do this, you will need to adjust the length of the strap for a tight fit around the car seat. **FOR SAFE OPERATION, IT IS VERY IMPORTANT THAT THE CAR SEAT STRAP IS ALWAYS TIGHTLY FASTENED OVER THE CAR SEAT.**
3. Test for secure installation by moving the car seat in all directions. The car seat should be securely attached to the Double Snap-N-Go®.

Removal of the Graco® Snug Ride Infant Car Seat

1. Unlock the Car Seat Strap and remove from over the infant car seat.
2. With one hand, grasp the car seat handle (in its upright, carrying position) and with your other hand squeeze the handle on the back of the car seat and lift the car seat upward from the Double Snap-N-Go® frame. See Figure 5.

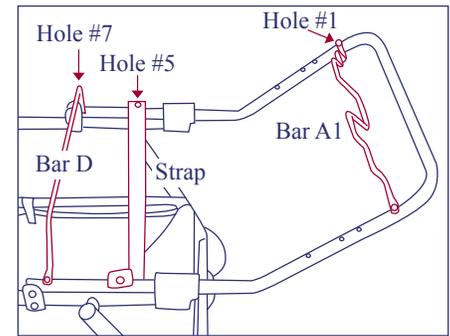


Fig. 1

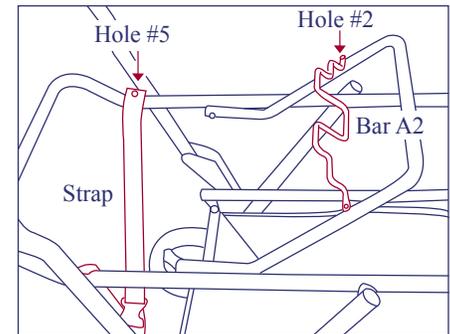


Fig. 2

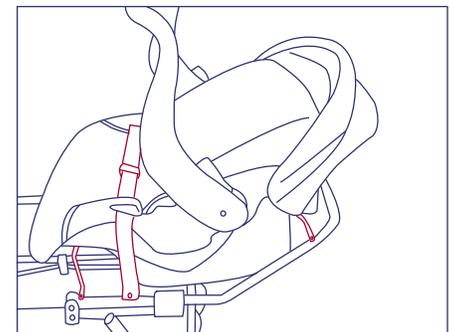


Fig. 3

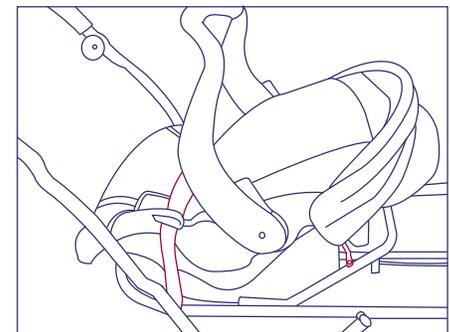


Fig. 4

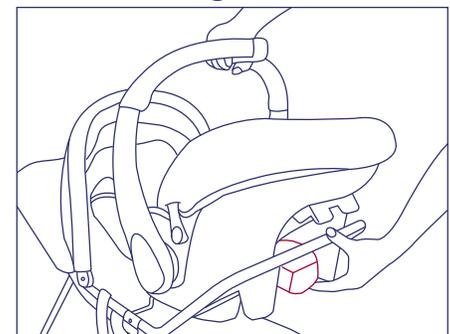


Fig. 5

Graco® and Cozy Carry are the trademarks of their owners. They are not associated with Baby Trend and no approval or endorsement is implied.

Installation Instructions for Peg Perego® Primo Viaggio®

The Double Snap-N-Go® will accommodate the Peg Perego® Primo Viaggio® Infant Car Seat. Please follow these instructions for proper installation of the Primo Viaggio®.

Front Seat:

1. Remove (unscrew) Crossbars A1, B1, and D from the Double Snap-N-Go® frame. Remove the Car Seat Straps from the Double Snap-N-Go® frame. Retain the screws you remove.
2. Attach Crossbar A1 to the Double Snap-N-Go® frame using the two holes labeled #4. Use the two screws that you removed in step 1. Please see figure 1.
3. Attach both Car Seat Straps to the Double Snap-N-Go® frame using the two holes labeled #3. Use the two screws that you removed in step 1. Please see figure 1.

Rear Seat:

1. Remove (unscrew) Crossbars A2, B2, and B1 from the Double Snap-N-Go® frame. Remove the Car Seat Straps from the Double Snap-N-Go® frame. Retain the screws you remove.
2. Attach Crossbar A2 to the Double Snap-N-Go® frame using the two holes labeled #3. Use the two screws that you removed in step 1. Please see figure 2.
3. Attach Crossbar B1, so that the bent section faces down, to the Double Snap-N-Go® frame using the two holes labeled #4. Use the two screws that you removed in step 1. Please see figure 2
4. Attach both Car Seat Straps to the Double Snap-N-Go® frame using the two holes labeled #2. Use the two screws that you removed in step 1. Please see figure 2.

Insertion of the Peg Perego® Primo Viaggio® Infant Car Seat:

1. With one hand grasp the car seat handle (in its upright, carrying position) and with your other hand squeeze the handle on the back of the car seat (see step 8, to remove car seat, of the Primo Viaggio instructions) and gently place the seat, so that the baby faces the rear, onto the Double Snap-N-Go® so that the rear small grooves on the seat bottom hook over Crossbar C for the front or Crossbar B1 for the rear. Release the handle and check that the seat locked onto the bar. See Figure 3. **FOR SAFE OPERATION, IT IS VERY IMPORTANT THAT THE REAR LATCHES OF THE SEAT LOCK SECURELY ONTO THE CROSSBAR.**
2. Feed the Car Seat Straps through the two slots found on the rear of the Peg Perego® Primo Viaggio® Car Seat shell as shown in figure 4. Buckle the two straps together. The first time your do this, you will need to adjust the length of the strap for a tight fit around the car seat. Please see figure 4.
3. Test for secure installation by moving the car seat in all directions. The car seat should be securely attached to the Double Snap-N-Go® .

Removal of the Peg Perego® Primo Viaggio Infant Car Seat

1. Unlock the Car Seat Strap and remove.
2. With one hand, grasp the car seat handle (in its upright, carrying position) and with your other hand squeeze the handle on the back of the car seat (see step 8, to remove car seat, of the Primo Viaggio® instructions) and lift the car seat upward from the Double Snap-N-Go® . See Figure 5.

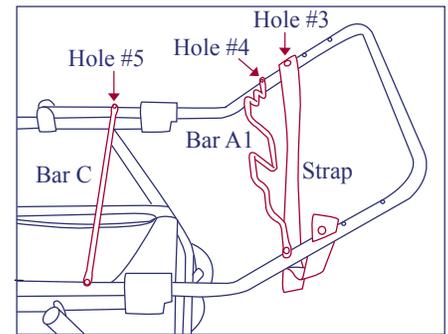


Fig. 1

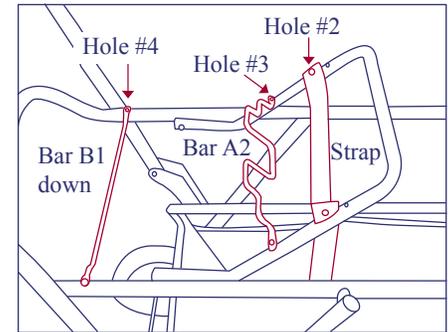


Fig. 2

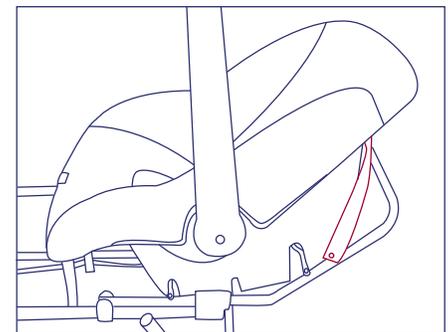


Fig. 3

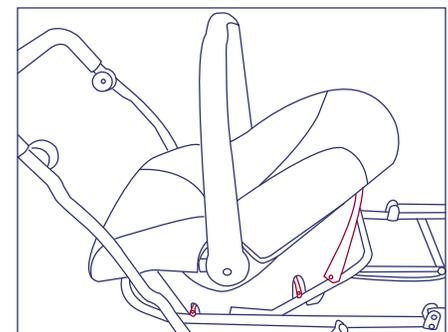


Fig. 4

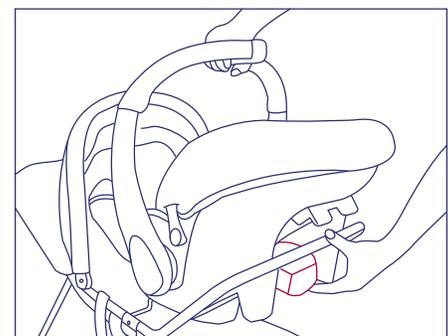


Fig. 5

Peg Perego® and Primo Viaggio® are the trademarks of their owners. They are not associated with Baby Trend and no approval or endorsement is implied.

Installation Instructions for Baby Trend® Latch-Loc®

The Double Snap-N-Go® will accommodate the Latch-Loc® Infant Car Seat. Please follow the following instructions for proper installation of the Latch Loc.

Front Seat:

1. Remove (unscrew) Crossbars A1, B1, and C and D from the Double Snap-N-Go® frame. Remove the Car Seat Straps from the Double Snap-N-Go® frame. Retain the screws you remove.
2. Attach the Car Seat Straps to the Double Snap-N-Go® frame using the two holes labeled #5 as shown in figure 1. Use the two screws that you removed in step 1.
3. Attach Crossbar C, to the Double Snap-N-Go® frame using the two holes labeled #7 as shown in figure 1.

Rear Seat:

1. Remove (unscrew) Crossbars A 2, B2 and B1 from the Double Snap-N-Go® frame. See figure 2.

Insertion of the Latch-Loc® Infant Car Seat

1. With one hand grasp the car seat handle (in its upright, carrying position) and gently place the seat, so that the baby faces the rear of the Double Snap-N-Go®, onto the Double Snap-N-Go® so that the large groove on the seat bottom, nearest the head-end of the seat, hooks over Crossbar BT1 in the front or crossbar BT2 in the rear. Check that the seat locked onto the Crossbar. See Figure 3. **FOR SAFE OPERATION, IT IS VERY IMPORTANT THAT THE SEAT LOCK SECURELY ONTO THE CROSSBAR.**
2. Feed the Car Seat Straps through the auto belt slots on the infant car seat as shown in Figure 4 and snap the two buckles together. The first time your do this, you will need to adjust the length of the strap for a tight fit around the car seat. **FOR SAFE OPERATION, IT IS VERY IMPORTANT THAT THE CAR SEAT STRAP IS ALWAYS TIGHTLY FASTENED OVER THE CAR SEAT.**
3. Test for secure installation by moving the car seat in all directions. The car seat should be securely attached to the Double Snap-N-Go®.

Removal of the Latch-Loc® Infant Car Seat:

1. Unlock the Car Seat Strap and remove from over the infant car seat.
2. With one hand, grasp the car seat handle (in its upright, carrying position) and with your other hand squeeze the handle on the front of the car seat and lift the car seat upward from the Double Snap-N-Go® frame. See Figure 5.

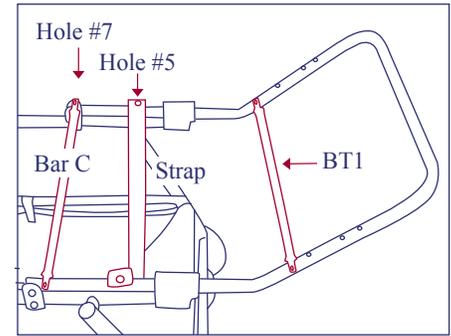


Fig. 1

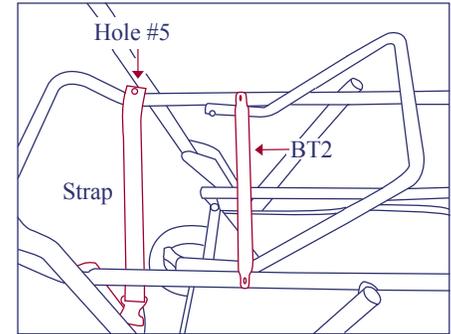


Fig. 2

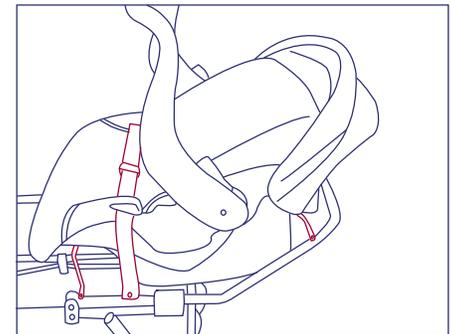


Fig. 3

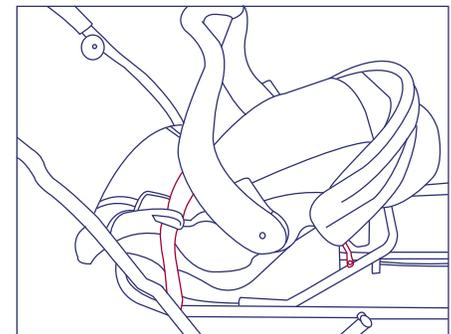


Fig. 4

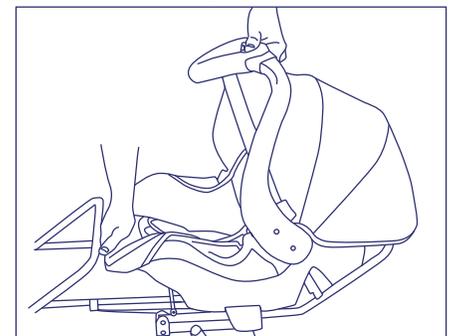


Fig. 5

Baby Trend® and Latch-Loc are the trademarks of their owners. They are not associated with Baby Trend and no approval or endorsement is implied.