




LZ-350 Bracket Typical mounting on IN-SWINGING door

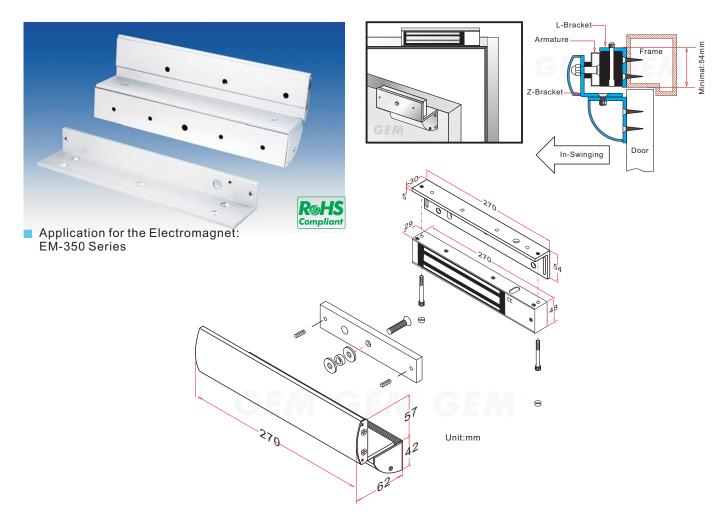

Installation Steps of LZ bracket for In-swinging doors




Find a mounting location on the door frame for the L bracket. Make sure that the door is still closeable.




Close the door. Measure the correct position by bringing the armature plate close to the contact surface of the electromagnetic lock.


Tighten the electromagnetic lock on the L bracket by using the fixing screw.




Turn on the power of EM-Lock, and let the armature plate bonds to the EM-lock. Adjust the position between the Z bracket and the door frame.




Assemble the Z bracket, and make sure that the Z bracket is adjustable.



Once the position is correct, use the screws to permanently mount the Z bracket on the door frame.



Insert the guide pins into the armature plate. Put one rubber washer between armature plate and the Z bracket.



Closing the cover on bracket.



The products are manufactured under an ISO 9001 & QC 080000 Certified Quality Management Program environment back its product quality, performance and commitment to customer satisfaction.

GIANNI INDUSTRIES, INC.

No. 13, Zhong Sing Road, Tu-Cheng Industrial Zone, Tu-Cheng City, Taipei, Taiwan 23678 Tel: 886-2 2267 7986 / Fax: 886-2 2267 9876 E-Mail: info@gianni.com.tw Website: gianni.tw Copyright 2008 Gianni industries, inc. All rights reserved. DM-CA-LZ-350 Ver. C Published on 2008.05.27