

VIRTUOSO ELITE™ WHIRLPOOL

Comfortable two person design with dual back support positions and factory installed grab bar

- 7236E (specify White 020, Bone 021, or Linen 222)**
 - Acrylic with fiberglass reinforcement
 - 2.0 HP self-draining pump/motor with dry run seal
 - Ten multi-directional and flow adjustable jets including:
 - Two high performance Ideal-flow™ Jets
 - Eight interchangeable Flex-jets™
 - Three silent air volume controls
 - Deck-mounted On/Off control
 - Complete factory installed and tested whirlpool system

- 7236EC (specify White 020, Bone 021, or Linen 222)**
 - Same as above with the StayClean™ whirlpool system featuring Antimicrobial AlphaSan®

Nominal Dimensions:
72" x 36" x 21-1/4"
(1829 x 914 x 540mm)

Components Needed:

- Bath Filler*: (specify finish)
- Bath Drain: BATH-DRAIN (specify Chrome 002, Polished Brass 099, or Satin 295)

- Custom Accessories Available:**
- Pulse Jet Kit: PULSE-JET (two per kit, specify White 020, Bone 021, or Linen 222)
- Soft Jet Kit: SOFT-JET (two per kit, specify White 020, Bone 021, or Linen 222)
- Six Foot Apron: 6FT-APRON (specify White 020, Bone 021, or Linen 222)
- E-Z-Install™ Whirlpool Heater - EZHEAT-100
- Tile Bead Kit: TILE-BEAD

* See American Standard Faucet Selector




Compliance Certifications - Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

NOTE: Roughing-in dimensions and product specifications shown on reverse side of page.

NOTE: E-Z-Install™ Whirlpool Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

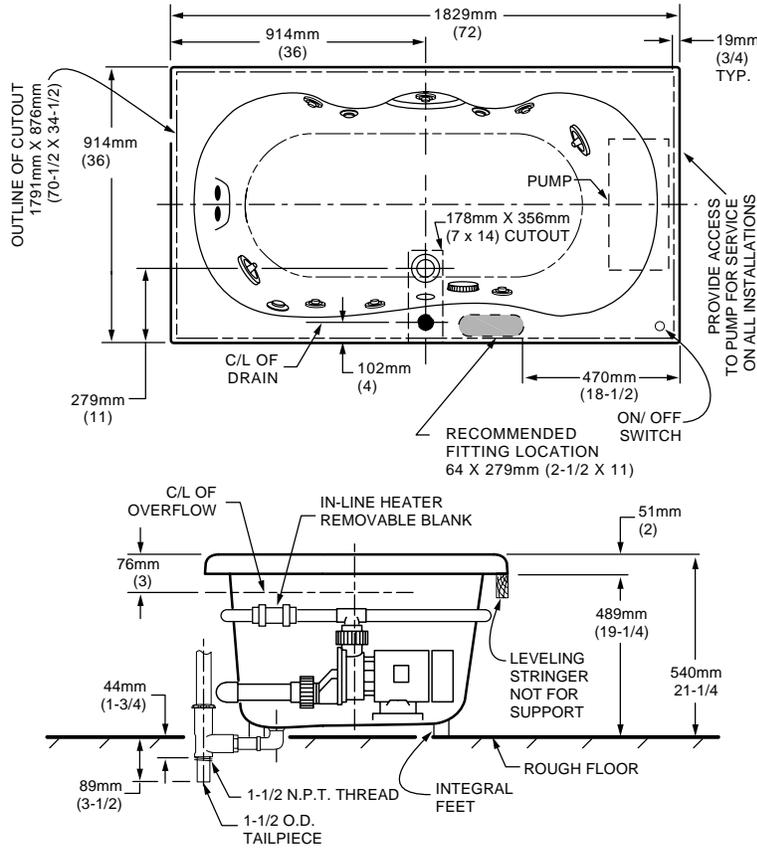

GENERAL SPECIFICATIONS FOR 7236E WHIRLPOOL	
INSTALLED SIZE	72 x 36 x 21-1/4 In. (1829 x 914 x 540mm)
WEIGHT	101 Lbs. (45 Kg.)
WEIGHT w/WATER	751 Lbs. (338 Kg.)
GAL. TO OVERFLOW	78 Gal. (296 L)
WHIRLPOOL MIN. OPERATING VOL.	69 Gal. (262 L)
BATHING WELL AT SUMP	46 x 18 In. (1168 x 457mm)
BATHING WELL AT RIM	66 x 30-1/2 In. (1676 x 775mm)
WATER DEPTH TO OVERFLOW	15-3/4 In. (400mm)
FLOOR LOADING (PROJECTED AREA)	42 Lbs./Sq.Ft. (204 Kgs./Sq.m)
PTS.	25.6
CUBE (FT ³)	49.4
WHIRLPOOL ELECTRICAL SPECIFICATIONS	
PUMP	2.1 HP, 14.4 AMPS, 120V.

- NOTES:**
- BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.
 - REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL, DECK MOUNTED SPOUT AND INTEGRATED BATH FILLER FOR ADDITIONAL INFORMATION.
 - OPTIONAL 3-WALL TILING BEAD KIT No. TILE-BEAD AND APRON No. 6FT-APRON MUST BE ORDERED SEPARATELY.
 - PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.
 - IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.
- IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1
 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.