

SPACE DOME CAMERA




CDR-1202



Features

- 1/3" Sony CCD, 420TVL, 0.5Lux, Digital Signal Processing
- Elegant Appearance, applying in concealing place
- Special designed housing of optics materials, reduce light loss
- Easy installation and adjustment
- Reliable performance, stable quality, reasonable price, wide applications including: banks, hotels, supermarkets, office buildings, hospitals, schools, post offices, government offices, financial departments, and toll booths, among others
- Cameras above are available with both black and white dome and respond to the environment around

Dimensions

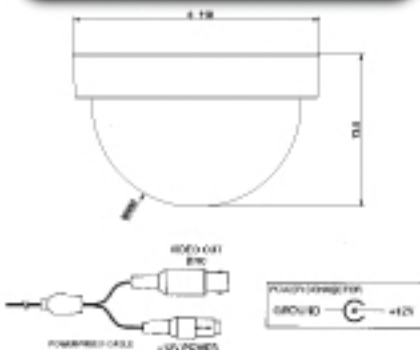

Specifications

Model	CDR-1202
Image Pick up device	1/3" Sony Super HAD CCD
Effective Pixels	PAL: 512(H)×582(V); NTSC: 512(H)×494(V)
Signal system	PAL or NTSC Color system
Horizontal Resolution	420TVLines
S/N Ratio	52dB
Min. Illumination	0.5Lux/F1.2
White Balance	Automatic
Electronic Shutter	1/50-1/100,000sec(PAL), 1/50-1/100,000sec(NTSC)
Lens	3.6mm optional
Gamma Correction	>0.45
Output Signal	1.0Vp-p 75 Ohm, sync negative polarity
AGC/AWB	Automatic
Power Supply	DC 12V ±10%
Operating Temperature	-10 °C ~+50 °C RH95%MAX
Weight	0.7 lbs



®

SVA Group USA Inc.
1316 John Reed Court, City of Industry, CA 91745
Tel: 626-363-9500 | Fax: 626-363-9508
1-888-8-ASK-SVA
<http://www.sva-usa.com>