

Call Peck Road Truck Center At: (877) 605-7623 Or Visit Us On The Web At: www.peckroad.com



EMPLOYEE OF THE YEAR.

When duty calls, the 2005 Ford Chassis Cabs arrive more capable than ever. On F-450/F-550, a new wider-track front end points the way, and its engineering powerfully delivers: The new front suspension and steering systems provide excellent maneuverability and a tighter turning diameter, and an improved frame helps increase front GAWR capacity and supports GCWRs up to 33,000 lbs. New 3-valve engine technology adds even more muscle to the renowned TritonTM gas engines. Improved 4-wheel disc brakes and Ford's exclusive fully integrated Trailer Brake Controller option redefine towing capability.



F-450 Regular Cab

F-550 SuperCab

F-550 Crew Cab


01

Brake Controller option redefine towing capability. 2005 Ford F-350/F-450/F-550 Super Duty 03 Chassis Tighter Turning Diameter New Twin-Coil Monobeam Front Suspension GAWR, GVWR and GCWR Increases 05 **Powertrain** TritonTM 3-Valve Variable Cam Timing Power Stroke® V8 Turbo Diesel TorqShiftTM Available with Gas Engines 07 Intelligent Function First Integrated Trailer Brake Controller Increased Trailer Towing 09 Upfits Increased Rear Axle Capability Improved Brakes and Frame Available Integrated Upfitter Switches Interior FlexFold[™] Convenient Seating/Storage New Instrument-Panel Design Many Available Amenities **Specifications** Standard and Available Equipment Specifications/Configurations F-550 XLT SuperCab _ Dark Toreador Red Metallic

2005 Ford F-350/F-450/F-550 Super Duty

>LOADS OF CAPABILITY.

Ford Super Duty Chassis Cabs have the capacity to handle the big loads, and the confidence to maneuver them. The all-new Twin-Coil Monobeam front suspension on F-350 4x4 and F-450/F-550 is a major contributor to astounding payload, GAWR, GVWR and GCWR capability. While refined engineering makes it easier to transport your loads, a 5.25"-wider front axle and an all-new steering system with increased wheel cuts reduce turning diameter by as much as 13.9' wall-to-wall on F-450/F-550 models. Now Super Duty does more in even tighter working conditions.

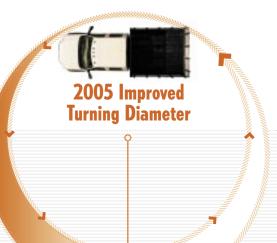

Super In Tight Spots

All-New Steering - Thanks to the new suspension and steering systems, F-450 and F-550 Super Duty Chassis Cabs are easier than ever to maneuver and park. Increased wheel cuts allow for a turning-diameter improvement of up to 12.9' curb-to-curb and 13.9' wall-to-wall.



Massive Capabilities – Super Duty Chassis Cabs offer strength across the board. Load-carrying capacities can reach up to 12,300 lbs.; GVWRs up to 19,000 lbs.; and GCWRs up to 33,000 lbs., when properly equipped.

New Twin-Coil Monobeam Front Suspension — On F-350 4x4 and all F-450/F-550 Super Duty models, this all-new front suspension eliminates inherent interleaf friction and helps reduce axle windup. On F-450/F-550, it also accommodates a larger, 7000-lb.-capacity axle that's 5.25" wider as well.

03 commtruck.ford.com Chassis

>TREMENDOUS FORCE.

Ford Super Duty Chassis Cabs deliver enormous power the moment you step on the accelerator. The vigorous 5.4L TritonTM V8 sets the standard, while the colossal 6.8L TritonTM V10 boasts best-in-class* gas horsepower and torque. And new 3-valve technology ensures that you put your strength to its most efficient use. Equally robust is Chassis Cab's diesel counterpart — the Power Stroke® V8 Turbo Diesel. The highly durable Power Stroke churns out intense low-end torque and has a B10 life design of 250,000 miles. Combined with the 6-speed manual or TorqShiftTM 5-speed automatic transmission, these powerplants offer optimum strength.

*Traditional chassis cab trucks under 22,000 lbs.



6.0L Power Stroke V8 Turbo Diesel

| ENGINE TYPE | Turbo Diesel |
|--------------------|----------------------|
| CONFIGURATION | OHV 32-Valve V8 |
| DISPLACEMENT | 6.0 Liters |
| SAE NET HORSEPOWER | 325 @ 3300 rpm |
| SAE NET TORQUE | 570 lbft. @ 2000 rpm |


5.4L 3-Valve Triton V8

| ENGINE TYPE | Gas V8 |
|--------------------|----------------------|
| CONFIGURATION | SOHC 3-Valve VCT V8 |
| DISPLACEMENT | 5.4 Liters |
| SAE NET HORSEPOWER | 300 @ 5000 rpm |
| SAE NET TORQUE | 365 lbft. @ 3750 rpm |

Productive Power

need to get the work moving.

3-Valve Variable Cam Timing (VCT) — The 5.4L 3-valve Triton V8 engine features innovative variable cam timing and Electronic Throttle Control to deliver the power you



| ENGINE TYPE | Gas V10 |
|--------------------|----------------------|
| CONFIGURATION | SOHC 3-Valve V10 |
| DISPLACEMENT | 6.8 Liters |
| SAE NET HORSEPOWER | 362 @ 4750 rpm |
| SAE NET TORQUE | 457 lbft. @ 3250 rpr |

Ultimate Power Management

TorqShift 5-Speed Automatic Transmission — This remarkable transmission features a selectable tow/haul mode. Its sophisticated electronic controls sense towing and hauling demands and adjust its operation to meet them. When hauling a heavy load or trailer, the tow/haul mode helps reduce gear hunting, improves power delivery, and even uses engine braking to help control vehicle speed when descending hills.


Extra Muscle

Power TakeOff (PTO) — An available transmission-integrated Power TakeOff provision lets you power accessories like dump boxes, plow blades, liftgates, winches, skylifts, air compressors, auxiliary hydraulic pumps and other add-on equipment.

Power On Demand

Stationary Elevated Idle Control (SEIC) — New for 2005 and standard on every Chassis Cab powertrain. This vital feature allows you to elevate the engine idle speed of a stationary vehicle to operate a transmission-mounted PTO, or engine FEAD-mounted clutch pump, air compressor or generator. On the 6.0L Power Stroke V8 Turbo Diesel, it can also be used to help keep the vehicle battery charged under extreme electrical demand, such as when supporting ambulance emergency lighting and life-support equipment.

Powertrain 05

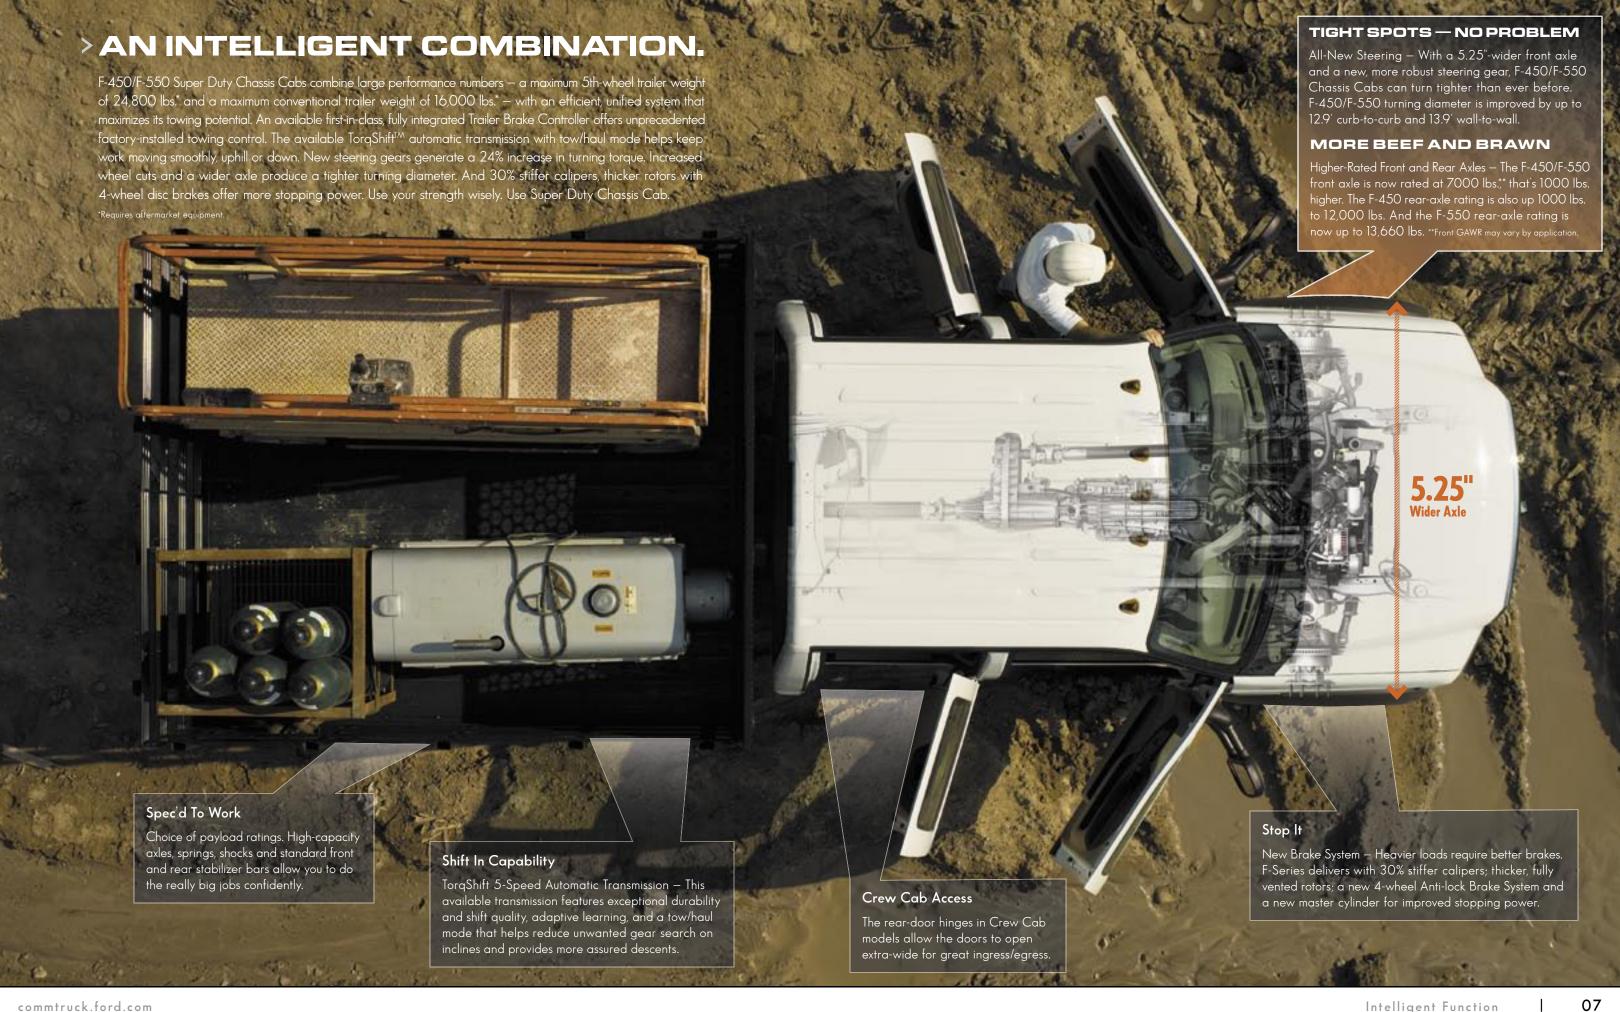

commtruck.ford.com

>THE BUSINESS MODEL.

From dump body to stake bed, and everything in between, Super Duty Chassis Cab is Built Ford Tough to easily upfit to your business needs. It starts underneath with a muscular rear axle and suspension capable of handling a variety of upfitter installations. From there, heavy-duty flat frame rails and improved brakes help contribute to massive GAWRs and GVWRs. Trailer tow mirrors even come standard. And seamless factory-installed options like upfitter switches and an available fully integrated Trailer Brake Controller send your truck out of the dealership ready for work. Just pick your cab and go.



Upfitters' Dream

Upfitter Switches — These available switches facilitate add-on system installations. They provide easy power access and upfit operation integrated with the instrument panel.

Great Clearance

Thanks to a low cab design, F-Series Super Duty is well-suited to over-cab upfits.

The Bottom Line

Super Duty Chassis Cab's incredibly strong frame provides a solid foundation designed to conveniently shoulder aftermarket installations.

Regular Cab

Front Seats — An all-vinyl full bench comes standard on XL. A high-series cloth 40/20/40 split bench is included with XLT models. Lariat includes a split bench with leather-trimmed seats. (F-450 XL shown.)



SuperCak

A fold-up bench comes standard in vinyl on XL, cloth on XLT and premium vinyl on Lariat. There is also a rear-seat-delete option. (F-350 XLT shown.



Crew Cab

Front Seats — A cloth/vinyl weave bench seat comes standard on XL. A 40/20/40 split-bench seat is standard in cloth on XLT and leather-trimmed on Lariat. Rear Seats — A cloth/vinyl weave fold-forward bench is standard on XL. A FlexFoldTM 60/40 split rear bench with fold-flat feature in cloth is standard on XLT and leather-trimmed on Lariat. (F-550 XLT shown.)



Flat Frame

Flat frame rails are designed specifically to accommodate

Fuel Tank Choices

Long-Life Exhaust

Stainless steel construction resist

Proportional Trailer Braking

Integrated Trailer Brake Controller (TBC) – The available TBC is seamlessly integrated and offers trailer braking that is proportional to vehicle brake pressure for more towing confidence. And because the system is factory-installed, it's a value covered by the Ford New Vehicle Limited Warranty.



commtruck.ford.com Upfits 09

> NO CONCESSIONS NECESSARY.

Why compromise when you can have it all? The F-Series Super Duty Chassis Cab interior offers selection, durability, functionality and comfort. Versatile FlexFoldTM rear seating on Crew Cab is capable of several different configurations. Available upfitter switches and Trailer Brake Controller are fully integrated into the new instrument panel. Auxiliary steering-wheel-mounted A/C and audio controls, available with Lariat Luxury Package, help keep your attention on the job. And Super Duty Chassis Cab's long list of available amenities includes: power windows and door locks, power/heated seats, driver lumbar support and tilt wheel with speed control.




XLT SuperCab 4x4 _ Medium Flint Cloth Interior shown with optional equipment



Available Lariat Luxury Package





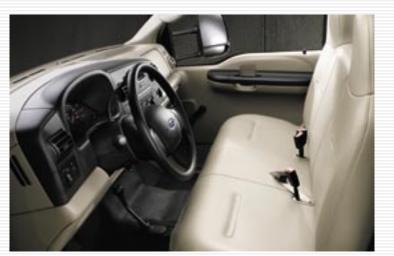

New Information

Redesigned Instrument Panel and Engine Hour Meter — The fresh design includes new information such as an engine hour meter. Thoughtful conveniences are also available, such as a driver's glove compartment, upfitter switches, Trailer Brake Controller and more.

Fold To Your Needs

FlexFold Seating — The Crew Cab 60/40 split rear seat increases the functionality of an already versatile interior. Depending on what you're storing, you can fold either one or both seatbacks down, or the seat bottoms up to form a flat, steel loadfloor.

Tough Material

Vinyl Seating — You need an interior that's as durable as it is comfortable. The F-Series Super Duty Chassis Cab vinyl seating material is Built Ford Tough to withstand the rigors of your daily usage.

commtruck.ford.com

> SPECIFICATIONS

F-350/F-450/F-550 SUPER DUTY

| Safety/Security | |
|---|-----|
| Airbags ¹ — Driver and right-front passenger | |
| Alert chimes — Headlamps-on, key-in-ignition and door ajar | |
| Belt-Minder® safety belt reminder | |
| BlockerBeam® — Front bumper underride protection system | |
| Brake/shift interlock (with automatic transmission) | |
| Child-safety seat top tether anchors | |
| Fuel pump inertia shutoff switch | |
| Height-adjustable safety belts — Front (Regular Cab, XL SuperCab, Crew C | ab |
| Passenger airbag deactivation switch (Regular Cab, SuperCab) | |
| Safety belt energy-management retractors — Front outboard positions | |
| Side-impact door beams | |
| Mechanical | |
| Manual 4-wheel-drive system with manual locking hubs (4x4 models or | ly |
| 5.4L SOHC 3-valve Triton™ V8 engine (F-350 SRW) | |
| 6.8L SOHC 3-valve Triton V10 engine (F-350 DRW/F-450/F-550) | |
| 6-speed manual overdrive transmission (F-350/F-450) | |
| ForqShift™ 5-speed automatic overdrive transmission (F-550) | |
| 100,000-mile tune-up interval² (gas engines) | |
| Battery saver | |
| Fail-safe engine cooling system (gas engines) | |
| -uel tank – 40-gallon capacity (includes auxiliary fuel tap) | |
| Power 4-wheel disc brakes with ABS | |
| Power steering | |
| Stabilizer bars — Front and rear | |
| Stainless steel exhaust system | |
| Steering damper | |
| nterior | |
| Assist and ride handles | |
| Coat hooks – 2 | |
| Cupholders – 2 on instrument panel (2 in rear with SuperCab and | |
| (LT/Lariat Crew Cab) | |
| Dome light (front and rear with Crew Cab) | |
| Flip-open rear quarter windows (SuperCab) | |
| nstrumentation – Engine hour meter, tachometer, trip odometer, voltmet | er |
| (man. trans.), oil pressure, coolant temperature, transmission temperatu | ıre |
| gauge (auto. trans.), air filter minder (diesel only), fuel gauge, indicate | or |
| ights and turbo boost (diesel only) | |
| Power points – 2 on instrument panel (including lighter) | |
| Steering wheel — Black vinyl | |
| Exterior | |
| | |
| Bumper — Front, painted | |

Roof clearance lights Solar-tinted glass Tow hooks – Front (2)

Trailer tow – 7-wire harness (blunt cut) Windshield wipers – Interval

¹Always wear your safety belt and always deactivate the passenger airbag when using a rear-facing child-safety seat with Regular Cab and SuperCab models. Always wear your safety belt and always secure children in the rear seat with Crew Cab models. Passenger airbag may be deleted. ²Under normal driving conditions with routine fluid and filter changes.

F-350/F-450/F-550 SUPER DUTY CHASSIS CAB FEATURES & OPTIONS

| Safety/Security | XL | XLT | Laria |
|--|----|-------------|-------------|
| Advanced Security Group – Includes autolock, autolamp, illuminated entry | _ | 0 | • |
| system, driver's-door keypad and remote keyless entry system with 2 key fobs | | | |
| Mechanical | | | |
| 5.4L SOHC 3-valve Triton V8 engine | • | • | • |
| 6.8L SOHC 3-valve Triton V10 engine | • | • | • |
| 6.0L OHV 32-valve Power Stroke® V8 Turbo Diesel engine | 0 | 0 | 0 |
| 6-speed manual overdrive transmission (optional on F-550) | • | • | • |
| TorqShift 5-speed automatic overdrive transmission | • | • | • |
| Electronic Shift-On-the-Fly 4-wheel-drive system with auto/manual locking | _ | 0 | 0 |
| hubs (F-350 4x4 models only) | | | |
| 18" steel wheels (F-350 SRW) | • | _ | _ |
| 18" chromed steel wheels (F-350 SRW) | _ | | _ |
| 18" forged polished-aluminum wheels (F-350 SRW) | _ | 0 | _ |
| 18" premium polished-aluminum wheels (F-350 SRW) | _ | _ | • |
| 17" steel wheels – 6 (F-350 DRW) | • | • | _ |
| 17" forged polished-aluminum wheels – 4 (F-350 DRW) | _ | 0 | • |
| 19.5" steel wheels – 6 (F-450/F-550) | • | • | 0 |
| 19.5" forged-aluminum wheels – 4 (F-450/F-550) | _ | 0 | • |
| LT275/65R18 all-season BSW tires (F-350 SRW 4x2) | • | • | • |
| LT275/70R18 all-season BSW tires (F-350 SRW 4x4) | • | • | • |
| LT275/65R18 all-season OWL tires (F-350 SRW 4x2) | _ | 0 | 0 |
| LT275/70R18 all-terrain BSW tires (F-350 SRW 4x4) | 0 | 0 | 0 |
| LT275/70R18 all-terrain OWL tires (F-350 SRW 4x4) | _ | 0 | 0 |
| LT245/75R17 all-season BSW tires – 6 (F-350 DRW) | • | • | • |
| LT245/75R17 all-terrain BSW tires – 6 (F-350 DRW) | 0 | 0 | 0 |
| LT245/75R17 all-terrain OWL tires – 4 (F-350 DRW) ³ | | 0 | 0 |
| 225/70R19.5F all-season BSW tires (F-450/F-550) | • | • | • |
| 225/70R19.5F traction BSW tires – 4 rear only (F-450/F-550) | 0 | 0 | 0 |
| 225/70R19.5F max. traction BSW tires – 6 (F-450/F-550 4x4 only) | 0 | 0 | 0 |
| Dual alternators (diesel engine only) | 0 | • | 0 |
| Engine block heater | 0 | 0 | 0 |
| Fuel tank – 19-gallon capacity midship in place of standard | 0 | 0 | 0 |
| (DRW models only); some exclusions | | Ü | |
| Fuel tank – 59-gallon capacity dual tank combination: 40-gallon aft-of-axle | • | • | 0 |
| standard plus 19-gallon midship (DRW models with diesel engine only) | | | |
| Higher-ratio rear axle | 0 | 0 | 0 |
| Integrated Trailer Brake Controller (not available with Trailer Tow Package; | 0 | 0 | 0 |
| deletes Package on Lariat) | 0 | | |
| Jack | 0 | 0 | 0 |
| Limited-slip rear axle | 0 | 0 | 0 |
| Payload Upgrade Package – Increases GVWR for increased payload range | • | 0 | 0 |
| (F-350 SRW and F-550 only) | | | |
| | | | |
| Power TakeOff (PTO) provision – Manual transmission | 0 | 0 | 0 |
| Power TakeOff (PTO) provision – Automatic transmission with | 0 | 0 | 0 |
| 6.8L or 6.0L engine | | | |
| Skid plate – Transfer case (SuperCab and Crew Cab 4x4 models only) | 0 | 0 | 0 |
| | 0 | 0 | 0 |
| Spare tire and wheel – Includes jack | | | |
| | | | |
| Seating | • | _ | _ |
| Seating Front bench seat – HD vinyl (not available with Crew Cab) | • | | |
| Spare tire and wheel — Includes jack Seating Front bench seat — HD vinyl (not available with Crew Cab) Front bench seat — HD cloth/vinyl weave (standard with Crew Cab) Front bench seat — HD cloth | | | |
| Seating Front bench seat – HD vinyl (not available with Crew Cab) Front bench seat – HD cloth/vinyl weave (standard with Crew Cab) Front bench seat – HD cloth | 0 | _ _ _ | _ _ _ |
| Front bench seat – HD vinyl (not available with Crew Cab) Front bench seat – HD cloth/vinyl weave (standard with Crew Cab) Front bench seat – HD cloth Front bench seat – 40/20/40 with armrest, cupholders and storage bin | 0 | | |
| Front bench seat – HD vinyl (not available with Crew Cab) Front bench seat – HD cloth/vinyl weave (standard with Crew Cab) Front bench seat – HD cloth Front bench seat – 40/20/40 with armrest, cupholders and storage bin (XL – HD vinyl, XLT – cloth, Lariat – leather-trimmed) (XL – Fleet only) | 0 | | |
| Front bench seat – HD vinyl (not available with Crew Cab) Front bench seat – HD cloth/vinyl weave (standard with Crew Cab) Front bench seat – HD cloth Front bench seat – 40/20/40 with armrest, cupholders and storage bin | 0 | - - • | • |

[●] Standard ● Select Availability ○ Optional — Not Available

F-350/F-450/F-550 SUPER DUTY

| CHASSIS CAB FEATURES & OPTION | 15 (c | ontinue | d) |
|---|--------------|---------|--------|
| Seating (continued) | ΧL | XLT | Lariat |
| Front captain's chairs with console (XLT – cloth, Lariat – leather trim) | _ | 0 | 0 |
| Rear fold-up bench seat (SuperCab) | • | • | • |
| Rear bench with folding seatback (Crew Cab) | • | _ | _ |
| Rear FlexFold™ 60/40 split-bench seat, fold-flat feature with | _ | • | • |
| solid-steel loadfloor, grocery hooks, dual integrated cupholders | | | |
| and tray, and outboard head restraints (Crew Cab) | | | |
| Rear seat delete (SuperCab) | 0 | _ | _ |
| Heated seats – Driver and front-passenger | _ | _ | 0 |
| Lumbar support – Driver and front-passenger | _ | • | • |
| Power 6-way driver and passenger seats (passenger seat with | _ | 0 | • |
| Crew Cab only) | | | |
| Interior | | | |
| Accessory delay for power features | _ | • | • |
| Air conditioning | 0 | • | • |
| AM/FM stereo with digital clock | • | _ | _ |
| AM/FM stereo with single-CD player and digital clock | _ | • | • |
| AM/FM stereo with single-CD/cassette player and digital clock | | 0 | 0 |
| AM/FM stereo with 6-disc in-dash CD changer and digital clock | | 0 | 0 |
| Floor covering – Black vinyl | • | 0 | |
| Floor covering - Carpet | | • | • |
| Floor mats – Color-coordinated | | • | • |
| Floor mats – Black all-weather | | 0 | 0 |
| Overhead console with sunglasses storage and garage door | | | • |
| opener storage (SuperCab and Crew Cab) | | | • |
| Power-adjustable brake and accelerator pedals (with | | 0 | 0 |
| automatic transmission only) | | | |
| Power door locks | | • | • |
| Power windows with one-touch-down driver's-side feature | | • | • |
| Radio delete | 0 | | |
| Speed control/tilt steering wheel | 0 | • | • |
| Steering wheel – Black leather-wrapped | | | • |
| Storage tray – Behind seat | | • | • |
| Upfitter switches – 4 | 0 | 0 | 0 |
| Visors with passenger mirror | • | • | |
| Visors with illuminated driver and passenger mirrors | _ | | • |
| · • | | | |
| Exterior | | | |
| Bumper – Front, argent painted | • | | |
| Bumper – Front, chrome ⁴ | 0 | • | • |
| Cab steps – Black molded | 0 | 0 | • |
| Cab steps – Black tubular | 0 | | _ |
| Daytime running lamps (Fleet only) | 0 | 0 | 0 |
| | • | | |
| Grille – Argent painted | | • | • |
| Grille – Bright | | | |
| Grille – Bright Headlamps – Sealed-beam halogen | • | _ | |
| Grille – Bright Headlamps – Sealed-beam halogen Headlamps – Dual-beam jewel-effect ⁴ | • | • | • |
| Grille – Bright Headlamps – Sealed-beam halogen Headlamps – Dual-beam jewel-effect ⁴ Light – Underhood service ⁴ | | • | • |
| Grille – Bright Headlamps – Sealed-beam halogen Headlamps – Dual-beam jewel-effect ⁴ Light – Underhood service ⁴ Mirrors – Manual glass, manual telescoping trailer tow with | • | | |
| Grille – Bright Headlamps – Sealed-beam halogen Headlamps – Dual-beam jewel-effect ⁴ Light – Underhood service ⁴ Mirrors – Manual glass, manual telescoping trailer tow with 2-way fold | 0 | _ | - |
| Grille – Bright Headlamps – Sealed-beam halogen Headlamps – Dual-beam jewel-effect ⁴ Light – Underhood service ⁴ Mirrors – Manual glass, manual telescoping trailer tow with 2-way fold Mirrors – Power glass, manual telescoping trailer tow with | 0 | | |
| Grille – Bright Headlamps – Sealed-beam halogen Headlamps – Dual-beam jewel-effect ⁴ Light – Underhood service ⁴ Mirrors – Manual glass, manual telescoping trailer tow with 2-way fold Mirrors – Power glass, manual telescoping trailer tow with 2-way fold (also heated glass, integrated turn signals and | 0 | _ | - |
| Grille – Bright Headlamps – Sealed-beam halogen Headlamps – Dual-beam jewel-effect ⁴ Light – Underhood service ⁴ Mirrors – Manual glass, manual telescoping trailer tow with 2-way fold Mirrors – Power glass, manual telescoping trailer tow with 2-way fold (also heated glass, integrated turn signals and clearance lights) | 0 | _ | - |
| Grille – Bright Headlamps – Sealed-beam halogen Headlamps – Dual-beam jewel-effect ⁴ Light – Underhood service ⁴ Mirrors – Manual glass, manual telescoping trailer tow with 2-way fold Mirrors – Power glass, manual telescoping trailer tow with 2-way fold (also heated glass, integrated turn signals and clearance lights) Privacy glass (rear door windows and rear window) | 0 | • | - |
| Grille – Bright Headlamps – Sealed-beam halogen Headlamps – Dual-beam jewel-effect ⁴ Light – Underhood service ⁴ Mirrors – Manual glass, manual telescoping trailer tow with 2-way fold Mirrors – Power glass, manual telescoping trailer tow with 2-way fold (also heated glass, integrated turn signals and clearance lights) Privacy glass (rear door windows and rear window) Sliding rear window – Manual | 0 | - | • |
| Grille – Bright Headlamps – Sealed-beam halogen Headlamps – Dual-beam jewel-effect ⁴ Light – Underhood service ⁴ Mirrors – Manual glass, manual telescoping trailer tow with 2-way fold Mirrors – Power glass, manual telescoping trailer tow with 2-way fold (also heated glass, integrated turn signals and clearance lights) Privacy glass (rear door windows and rear window) | • • • · · · | • | • |

F-350/F-450/F-550 SUPER DUTY CHASSIS CAB EQUIPMENT PACKAGES

| | XL | XLT | Lariat |
|--|----|-----|--------|
| Ambulance Prep Package ⁵ (requires diesel engine) – Includes air conditioning, dual alternators (combined 260 amps), standard width axle included with SRW, wide-track 4.10 limited-slip axle included with DRW and maximum front spring/GAWR (4850 lbs. – depending on model) | 0 | 0 | 0 |
| Convenience Package – Includes speed control/tilt | 0 | _ | _ |
| steering wheel and air conditioning | | | |
| Heavy-Service Suspension Package ⁶ – Includes 1-up heavy-service front springs (150-lb. upgrade – 4x2; 400-lb. upgrade – 4x4; not available if maximum spring is selected as standard) | 0 | 0 | 0 |
| Extra-Heavy-Service Suspension Package ⁶ – Includes 2-up extra-heavy-service front springs (300-lb. upgrade – 4x2; 800-lb. upgrade – 4x4; not available if maximum spring is selected or standard) | 0 | 0 | 0 |
| High-Capacity Trailer Tow Package (F-450/F-550 with diesel engine and 4.88 axle only) – Includes 28,000 lbs. GCWR with F-450/F-550 6-speed manual transmission, 30,000 lbs. GCWR with F-450 with TorqShift, and 33,000 lbs. GCWR with F-550 with TorqShift | 0 | 0 | 0 |
| Lariat Luxury Package – Includes Electronic Automatic Temperature Control (EATC), auto-dimming rearview mirror, bronze-faced instrumentation cluster, instrumentation pack with enhanced message center, duplicate steering wheel audio/climate controls and woodgrain instrument-panel insert | _ | _ | 0 |
| Snow Plow Prep Package ⁶ – Includes specific spring/GAWR upgrade ranging from 5200-7000 lbs. (depending on model), 140-amp alternator and unique fan clutch with 6.0L diesel (4x4 only on F-350) | 0 | 0 | 0 |
| Trailer Tow Package – Includes trailer brake wiring kit ready for aftermarket upfit (no controller) | 0 | 0 | • |
| XL Décor Group – Includes chrome front bumper, dual-beam jewel-effect headlamps and underhood service light | 0 | _ | _ |

⁵Restrictions and special instructions apply. See your Ford Dealer for information. ⁶Option and other restrictions apply. See your Ford Dealer for information.

F-350/F-450/F-550 SUPER DUTY CHASSIS CAB INTERIOR DIMENSIONS

| ront | Regular Cab | SuperCab | Crew Cab |
|-----------------------|-------------|----------|----------|
| lead room | 41.1" | 41.4" | 41.3" |
| Shoulder room | 68.0" | 68.0" | 68.0" |
| Hip room | 67.4" | 67.4" | 67.4" |
| .eg room | 41.0" | 41.0" | 41.0" |
| /olume (cu. ft.) | 66.3 | 66.8 | 66.6 |
| Rear | | | |
| lead room | _ | 38.2" | 40.8" |
| Shoulder room | _ | 68.0" | 68.0" |
| Hip room | _ | 67.3" | 67.3" |
| .eg room | _ | 32.2" | 41.7" |
| /olume (cu. ft.) | _ | 48.4 | 67.0 |
| otal volume (cu. ft.) | 66.3 | 115.2 | 133.6 |
| | | | |

F-350/F-450/F-550 SUPER DUTY CHASSIS CAB MAXIMUM LOADED TRAILER WEIGHT (LBS.)

| MANUAL TRANS | SMISSI | ON | | | | |
|--|--|---|---|--|--|--|
| REGULAR CAB | Axle | GCWR | F-350 | F-350 | F-350 | F-350 |
| Engine | Ratio | (lbs.) | 4x2 SRW | 4x4 SRW | 4x2 DRW1 | 4x4 DRW1 |
| 5.4L 3-Valve | 3.73 | 15,000 | 8500 | 8100 | 8200 | 7800 |
| Triton™ V8 | 4.10 | 17,000 | 10,500 | 10,100 | _ | _ |
| | | 17,500 | _ | _ | 10,700 | 10,300 |
| 6.8L 3-Valve | 4.10 | 20,000 | 13,400 | 13,000 | | |
| Triton V10 | | 20,500 | _ | _ | 13,600 | 13,200 |
| | 4.30 | 22,500 | _ | _ | 15,600 | 15,200 |
| 6.0L Power Stroke® | 3.73 | 23,000 | 15,900 | 15,400 | | |
| V8 Turbo Diesel | | 23,500 | _ | _ | 16,100 | 15,700 |
| | 4.10 | 23,500 | _ | _ | 16,100 | 15,700 |
| | Axle | GCWR | F-450 | F-450 | F-550 | F-550 |
| Engine | Ratio | (lbs.) | | | | 4x4 DRW |
| 6.8L 3-Valve | 4.88 | 26,000 | 18,400 | 18,100 | 18,300 | 18,000 |
| Triton V10 | 5.38 | 26,000 | 18,400 | 18,100 | 18,300 | 18,000 |
| 6.0L Power Stroke | 4.30 | 26,000 | 17,900 | 17,500 | 10,500 | 10,000 |
| V8 Turbo Diesel | 4.88 | 26,000 | 17,900 | 17,500 | 17,800 | 17.500 |
| vo luibo Diesei | 4.00 | 28,000° | , | , | | , |
| | | 28,000 | 19,900 | 19,500 | 19,800 | 19,500 |
| SUPERCAB | Axle | GCWR | F-350 | F-350 | F-350 | F-350 |
| Engine | Ratio | (lbs.) | 4x2 SRW | 4x4 SRW | 4x2 DRW | 4x4 DRW |
| 5.4L 3-Valve | 3.73 | 15,000 | 8200 | 7700 | _ | _ |
| Triton V8 | 4.10 | 17,000 | 10,200 | 9700 | _ | _ |
| 6.8L 3-Valve | 4.10 | 20,000 | 13,000 | 12,600 | _ | _ |
| Triton V10 | | 20,500 | _ | _ | 13,300 | 12,800 |
| | 4.30 | 22,500 | _ | _ | 15,300 | 14,800 |
| 6.0L Power Stroke | 3.73 | 23,000 | 15,500 | 15,100 | | |
| V8 Turbo Diesel | | 23,500 | _ | _ | 15,700 | 15,300 |
| | 4.10 | 23,500 | _ | _ | 15,700 | 15,300 |
| | Axle | GCWR | F-450 | F-450 | F-550 | F-550 |
| Engine | Ratio | (lbs.) | | | | 4x4 DRW |
| 6.8L 3-Valve | 4.88 | 26.000 | 18,000 | 17,700 | 18,000 | 17,700 |
| | 4.00 | 26,000 | 10,000 | | | |
| | | 26,000 26.000 | , | | | • |
| Triton V10 | 5.38 | 26,000 | 18,000 | 17,700 | 18,000 | 17,700 |
| Triton V10 6.0L Power Stroke | 5.38 4.30 | 26,000 26,000 | 18,000 17,500 | 17,700 17,200 | 18,000 | 17,700 |
| Triton V10 | 5.38 | 26,000 26,000 26,000 | 18,000 17,500 17,500 | 17,700 17,200 17,200 | 18,000 — 17,400 | 17,700 — 17,100 |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel | 5.38 4.30 4.88 | 26,000 26,000 26,000 28,000 ² | 18,000 17,500 17,500 19,500 | 17,700 17,200 17,200 19,200 | 18,000 — 17,400 19,400 | 17,700 — 17,100 19,100 |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB | 5.38 4.30 4.88 | 26,000 26,000 26,000 28,000 ² GCWR | 18,000 17,500 17,500 19,500 F-350 | 17,700 17,200 17,200 19,200 F-350 | 18,000 — 17,400 19,400 F-350 | 17,700 — 17,100 19,100 F-350 |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine | 5.38 4.30 4.88 Axle Ratio | 26,000 26,000 26,000 28,000 ² GCWR (lbs.) | 18,000 17,500 17,500 19,500 F-350 4x2 SRW | 17,700 17,200 17,200 19,200 F-350 4x4 SRW | 18,000 — 17,400 19,400 | 17,700 — 17,100 19,100 |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve | 5.38 4.30 4.88 Axle Ratio 3.73 | 26,000 26,000 26,000 28,000 ² GCWR (lbs.) 15,000 | 18,000 17,500 17,500 19,500 F-350 4x2 SRW 8000 | 17,700 17,200 17,200 19,200 F-350 4x4 SRW 7500 | 18,000 — 17,400 19,400 F-350 | 17,700 — 17,100 19,100 F-350 |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve Triton V8 | 5.38 4.30 4.88 Axle Ratio 3.73 4.10 | 26,000 26,000 26,000 28,000 ² GCWR (Ibs.) 15,000 17,000 | 18,000 17,500 17,500 19,500 F-350 4x2 SRW 8000 10,000 | 17,700 17,200 17,200 19,200 F-350 4x4 SRW 7500 9500 | 18,000 — 17,400 19,400 F-350 | 17,700 — 17,100 19,100 F-350 |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve Triton V8 6.8L 3-Valve | 5.38 4.30 4.88 Axle Ratio 3.73 | 26,000 26,000 26,000 28,000 ² GCWR (lbs.) 15,000 17,000 20,000 | 18,000 17,500 17,500 19,500 F-350 4x2 SRW 8000 | 17,700 17,200 17,200 19,200 F-350 4x4 SRW 7500 | 18,000 — 17,400 19,400 F-350 4x2 DRW — | 17,700 17,100 19,100 F-350 4x4 DRW |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve Triton V8 | 5.38 4.30 4.88 Axle Ratio 3.73 4.10 4.10 | 26,000 26,000 26,000 28,000 ² GCWR (Ibs.) 15,000 17,000 20,000 20,500 | 18,000 17,500 17,500 19,500 F-350 4x2 SRW 8000 10,000 | 17,700 17,200 17,200 19,200 F-350 4x4 SRW 7500 9500 | 18,000 | 17,700 17,100 19,100 F-350 4x4 DRW ———————————————————————————————————— |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve Triton V8 6.8L 3-Valve Triton V10 | 5.38 4.30 4.88 Axle Ratio 3.73 4.10 4.10 | 26,000 26,000 26,000 28,000 ² GCWR (lbs.) 15,000 17,000 20,000 20,500 22,500 | 18,000 17,500 17,500 19,500 F-350 4x2 SRW 8000 10,000 12,800 | 17,700 17,200 17,200 19,200 F-350 4x4 SRW 7500 9500 12,400 | 18,000 — 17,400 19,400 F-350 4x2 DRW — | 17,700 17,100 19,100 F-350 4x4 DRW |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve Triton V8 6.8L 3-Valve | 5.38 4.30 4.88 Axle Ratio 3.73 4.10 4.10 | 26,000 26,000 26,000 28,000 ² GCWR (Ibs.) 15,000 17,000 20,000 20,500 | 18,000 17,500 17,500 19,500 F-350 4x2 SRW 8000 10,000 | 17,700 17,200 17,200 19,200 F-350 4x4 SRW 7500 9500 | 18,000 | 17,700 17,100 19,100 F-350 4x4 DRW ———————————————————————————————————— |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve Triton V8 6.8L 3-Valve Triton V10 | 5.38 4.30 4.88 Axle Ratio 3.73 4.10 4.10 | 26,000 26,000 26,000 28,000 ² GCWR (lbs.) 15,000 17,000 20,000 20,500 22,500 | 18,000 17,500 17,500 19,500 F-350 4x2 SRW 8000 10,000 12,800 | 17,700 17,200 17,200 19,200 F-350 4x4 SRW 7500 9500 12,400 | 18,000 | 17,700 17,100 19,100 F-350 4x4 DRW ———————————————————————————————————— |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve Triton V8 6.8L 3-Valve Triton V10 6.0L Power Stroke | 5.38 4.30 4.88 Axle Ratio 3.73 4.10 4.10 | 26,000 26,000 26,000 28,000 ² GCWR (lbs.) 15,000 17,000 20,000 20,500 22,500 23,000 | 18,000 17,500 17,500 19,500 F-350 4x2 SRW 8000 10,000 12,800 | 17,700 17,200 17,200 19,200 F-350 4x4 SRW 7500 9500 12,400 | 18,000 17,400 19,400 F-350 4x2 DRW 13,100 15,100 | 17,700 17,100 19,100 F-350 4x4 DRW 12,600 14,600 |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve Triton V8 6.8L 3-Valve Triton V10 6.0L Power Stroke | 5.38 4.30 4.88 Axle Ratio 3.73 4.10 4.10 4.30 3.73 | 26,000 26,000 26,000 28,000 ² GCWR (lbs.) 15,000 17,000 20,000 20,500 22,500 23,000 23,500 | 18,000 17,500 17,500 19,500 F-350 4x2 SRW 8000 10,000 12,800 | 17,700 17,200 17,200 19,200 F-350 4x4 SRW 7500 9500 12,400 | 18,000 | 17,700 17,100 19,100 F-350 4x4 DRW 12,600 14,600 15,100 |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve Triton V8 6.8L 3-Valve Triton V10 6.0L Power Stroke V8 Turbo Diesel Engine | 5.38 4.30 4.88 Axle Ratio 3.73 4.10 4.30 3.73 4.10 | 26,000 26,000 26,000 28,000 ² GCWR (Ibs.) 15,000 17,000 20,500 22,500 23,500 23,500 | 18,000 17,500 17,500 19,500 F-350 4x2 SRW 8000 10,000 12,800 ——————————————————————————————————— | 17,700 17,200 17,200 17,200 19,200 F-350 4x4 SRW 7500 9500 12,400 — 14,800 — F-450 | 18,000 | 17,700 17,100 19,100 F-350 4x4 DRW 12,600 14,600 15,100 |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve Triton V8 6.8L 3-Valve Triton V10 6.0L Power Stroke V8 Turbo Diesel Engine | 5.38 4.30 4.88 Axle Ratio 3.73 4.10 4.30 3.73 4.10 Axle Axle | 26,000 26,000 26,000 28,000 ² GCWR (Ibs.) 15,000 17,000 20,500 22,500 22,500 23,500 23,500 GCWR | 18,000 17,500 17,500 19,500 F-350 4x2 SRW 8000 10,000 12,800 ——————————————————————————————————— | 17,700 17,200 17,200 17,200 19,200 F-350 4x4 SRW 7500 9500 12,400 — 14,800 — F-450 | 18,000 17,400 19,400 F-350 4x2 DRW 13,100 15,100 15,500 15,500 F-550 4x2 DRW | 17,700 17,100 19,100 F-350 4x4 DRW |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve Triton V8 6.8L 3-Valve Triton V10 6.0L Power Stroke V8 Turbo Diesel | 5.38 4.30 4.88 Axle Ratio 3.73 4.10 4.30 3.73 4.10 Axle Ratio | 26,000 26,000 26,000 28,000 ² GCWR (Ibs.) 15,000 17,000 20,500 22,500 23,500 23,500 GCWR (Ibs.) | 18,000 17,500 17,500 19,500 F-350 4x2 SRW 8000 10,000 12,800 — 15,300 — F-450 4x2 DRW | 17,700 17,200 17,200 19,200 F-350 4x4 SRW 7500 9500 12,400 — 14,800 — F-450 4x4 DRW | 18,000 | 17,700 17,100 19,100 F-350 4x4 DRW |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve Triton V8 6.8L 3-Valve Triton V10 6.0L Power Stroke V8 Turbo Diesel Engine 6.8L 3-Valve | 5.38 4.30 4.88 Axle Ratio 3.73 4.10 4.30 3.73 4.10 Axle Ratio 4.88 | 26,000 26,000 26,000 28,000 ² (Ibs.) 15,000 17,000 20,500 22,500 23,500 23,500 GCWR (Ibs.) 26,000 26,000 | 18,000 17,500 17,500 19,500 F-350 4x2 SRW 8000 10,000 12,800 — 15,300 — F-450 4x2 DRW 17,800 | 17,700 17,200 17,200 17,200 19,200 F-350 4x4 SRW 7500 9500 12,400 — 14,800 — F-450 4x4 DRW 17,500 | 18,000 | 17,700 17,100 19,100 F-350 4x4 DRW |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve Triton V8 6.8L 3-Valve Triton V10 6.0L Power Stroke V8 Turbo Diesel Engine 6.8L 3-Valve Triton V10 6.0L Power Stroke OR Turbo Diesel | 5.38 4.30 4.88 Axle Ratio 3.73 4.10 4.30 3.73 4.10 Axle Ratio 4.30 5.38 4.30 | 26,000 26,000 26,000 28,000 ² (Ibs.) 15,000 17,000 20,500 22,500 23,500 23,500 GCWR (Ibs.) 26,000 26,000 | 18,000 17,500 17,500 19,500 19,500 F-350 4x2 SRW 8000 10,000 12,800 — — — — — — — — — — — — — — — — — — | 17,700 17,200 17,200 19,200 F-350 4x4 SRW 7500 9500 12,400 — — — — — — — — — — — — — — — — — — | 18,000 | 17,700 17,100 19,100 F-350 4x4 DRW |
| Triton V10 6.0L Power Stroke V8 Turbo Diesel CREW CAB Engine 5.4L 3-Valve Triton V8 6.8L 3-Valve Triton V10 6.0L Power Stroke V8 Turbo Diesel Engine 6.8L 3-Valve Triton V10 | 5.38 4.30 4.88 Axle Ratio 3.73 4.10 4.30 3.73 4.10 Axle Ratio 4.88 5.38 | 26,000 26,000 26,000 28,000 ² (Ibs.) 15,000 17,000 20,500 22,500 23,500 23,500 GCWR (Ibs.) 26,000 26,000 | 18,000 17,500 17,500 19,500 F-350 4x2 SRW 8000 10,000 12,800 — — — — — — — — — — — — — — — — — — | 17,700 17,200 17,200 19,200 F-350 4x4 SRW 7500 9500 12,400 — 14,800 — F-450 4x4 DRW 17,500 17,500 | 18,000 | 17,700 17,100 19,100 F-350 4x4 DRW |

¹F-350 DRW/F-450/F-550 weights shown are for 141" wheelbase Regular Cab or 176" wheelbase Crew Cab models. For 165," 189," 200" and 201" wheelbase models, weights may be somewhat less (usually not more than 200 lbs. or 400 lbs. with 201" wheelbase).

2Available with High-Capacity Trailer Tow Package only.

Note: 5th-wheel trailer weights shown. See your Ford Dealer for conventional trailer weights.

Note: Trailer weights shown assume 1000 lbs. second-unit body weight. Be sure combined weight of vehicle and trailer does not exceed listed GCWR. Trailer kingpin weight should be 15-25% of total loaded trailer weight. Make sure that the vehicle poyload (reduced by option weight) will accommodate trailer kingpin weight and the weight of passengers and cargo added to the towing vehicle. The addition of trailer kingpin weight, and the weight of passengers and cargo cannot cause vehicle weights to exceed the rear GAWR (Gross Axle Weight Rating) or GVWR (Gross Vehicle Weight Rating). These ratings can be found on the vehicle's Safety Compliance Certification Label.

| AUTOMATIC TR REGULAR CAB Engine | Axle Ratio | GCWR (lbs.) | F-350 4x2 SRW | F-350 4x4 SRW | F-350 4x2 DRW | F-350 4x4 DRW |
|--|---|---|---|--|--|--|
| 5.4L 3-Valve | 3.73 | 16,000 | 9500 | 9100 | | |
| Triton V8 | 4.10 | 16,500 | 11,500 | 11,100 | 9700 | 9300 |
| | 4.10 | 18,000 18,500 | 11,500 | 11,100 | 11,700 | 11,300 |
| 6.8L 3-Valve | 4.10 | 21,000 | 14,500 | 14,000 | — | - |
| Triton V10 | | 21,500 | _ | _ | 14,700 | 14,200 |
| | 4.30 | 23,000 | _ | _ | 16,200 | 15,700 |
| 6.0L Power Stroke | 3.73 | 23,000 | 15,900 | 15,500 | _ | _ |
| V8 Turbo Diesel | | 23,500 | _ | _ | 16,200 | 15,700 |
| | 4.10 | 23,500 | | | 16,200 | 15,700 |
| E., | Axle | GCWR | F-450 4x2 DRW ¹ | F-450 4x4 DRW | F-550 4x2 DRW | F-550 1 4x4 DRW |
| Engine 6.8L 3-Valve | Ratio 4.88 | (lbs.) 26,000 | 18,400 | 18,100 | 18,400 | 18,100 |
| Triton V10 | 5.38 | 26,000 | 18,400 | 18,100 | 18,400 | 18,100 |
| 6.0L Power Stroke | 4.30 | 26,000 | 17,900 | 17,600 | - | |
| V8 Turbo Diesel | 4.88 | 26,000 | 17,900 | 17,600 | 17,800 | 17,500 |
| | | 30,000 ² | 21,900 | 21,600 | _ | _ |
| | | 33,000² | | | 24,800 | 24,500 |
| SUPERCAB | Axle | GCWR | F-350 | F-350 | F-350 | F-350 |
| Engine | Ratio | (lbs.) | 4x2 SRW | 4x4 SRW | 4x2 DRW | 4x4 DRW |
| 5.4L 3-Valve | 3.73 | 16,000 | 9100 | 8700 | _ | _ |
| Triton V8 | | 18,000 | 11,100 | 10,700 | | |
| 6.8L 3-Valve | 4.10 | 21,000 | 14,100 | 13,600 | | |
| Triton V10 | 4.20 | 21,500 | _ | _ | 14,300 15,800 | 13,800 15,300 |
| 6.0L Power Stroke | 4.30 3.73 | 23,000 | 15,600 | 15,100 | 15,800 | 15,300 |
| V8 Turbo Diesel | 3.73 | 23,500 | 15,000 | 15,100 | 15,800 | 15,300 |
| VO TUIDO DIOSOI | 4.10 | 23,500 | _ | _ | 15,800 | 15,300 |
| | Axle | GCWR | F-450 | F-450 | F-550 | F-550 |
| Engine | Ratio | (lbs.) | | 4x4 DRW | 4x2 DRW | 4x4 DRW |
| 6.8L 3-Valve | 4.88 | 26,000 | 18,000 | 17,700 | 18,000 | 17,700 |
| Triton V10 | 5.38 | 26,000 | 18,000 | 17,700 | 18,000 | 17,700 |
| 6.0L Power Stroke | 4.30 | 26,000 | 17,500 | 17,200 | 17.500 | |
| V8 Turbo Diesel | 4.88 | 26,000 30,000 ² | 17,500 21,500 | 17,200 21,200 | 17,500 | 17,200 |
| | | 33,000° | 21,300 | 21,200 | 24,500 | 24,200 |
| | | - | | | | |
| CREW CAB Engine | Axle Ratio | GCWR (lbs.) | F-350 4x2 SRW | F-350 4x4 SRW | F-350 4x2 DRW | F-350 4x4 DRW |
| 5.4L 3-Valve | 3.73 | 16,000 | 8900 | 8500 | _ | _ |
| Triton V8 | 4.10 | 18,000 | 10,900 | 10,500 | _ | _ |
| 6.8L 3-Valve | 4.10 | 21,000 | 13,900 | 13,400 | _ | _ |
| Triton V10 | | 21,500 | _ | _ | 14,100 | 13,600 |
| | 4.30 | 23,000 | | | 15,600 | 15,100 |
| | 7.00 | | | 1/1000 | | _ |
| | 3.73 | 23,000 | 15,400 | 14,900 | | 15 100 |
| | 3.73 | 23,500 | 15,400 — | 14,900 — | 15,600 | 15,100 |
| | 3.73 4.10 | 23,500 23,500 | | | 15,600 | 15,100 |
| V8 Turbo Diesel | 3.73 4.10 Axle | 23,500 23,500 GCWR | - F-450 | - F-450 | 15,600 F-550 | 15,100 F-550 |
| V8 Turbo Diesel Engine | 3.73 4.10 | 23,500 23,500 | | F-450 | 15,600 F-550 | 15,100 F-550 1 4x4 DRW |
| V8 Turbo Diesel Engine 6.8L 3-Valve | 3.73 4.10 Axle Ratio | 23,500 23,500 GCWR (lbs.) | F-450 4x2 DRW | F-450 4x4 DRW | 15,600 F-550 4x2 DRW | 15,100 F-550 |
| V8 Turbo Diesel Engine 6.8L 3-Valve Triton V10 | 3.73 4.10 Axle Ratio 4.88 | 23,500 23,500 GCWR (lbs.) 26,000 | F-450 4x2 DRW ¹ 17,800 | F-450 4x4 DRW | 15,600 F-550 4x2 DRW 17,800 | 15,100 F-550 4x4 DRW 17,500 |
| V8 Turbo Diesel Engine 6.8L 3-Valve Triton V10 6.0L Power Stroke | 3.73 4.10 Axle Ratio 4.88 5.38 | 23,500 23,500 GCWR (Ibs.) 26,000 26,000 26,000 | F-450 4x2 DRW ¹ 17,800 17,800 | F-450 4x4 DRW 17,500 17,500 17,000 17,000 | 15,600 F-550 4x2 DRW 17,800 | 15,100 F-550 4x4 DRW 17,500 |
| 6.0L Power Stroke V8 Turbo Diesel Engine 6.8L 3-Valve Triton V10 6.0L Power Stroke V8 Turbo Diesel | 3.73 4.10 Axle Ratio 4.88 5.38 4.30 | 23,500 23,500 GCWR (Ibs.) 26,000 26,000 26,000 | F-450 4x2 DRW ¹ 17,800 17,800 | F-450 4x4 DRW 17,500 17,500 | 15,600 F-550 4x2 DRW 17,800 17,800 | 15,100 F-550 1 4x4 DRW 17,500 17,500 |

F-350/F-450/F-550 SUPER DUTY CHASSIS CAB

| REGULAR CAB | F-350 SRW | F-350 DRW | F-350 DRW | F-450 DRW | F-450 DRW | F-450 DRW | F-450 DRW | F-550 DRW | F-550 DRW | F-550 DRW | F-55C DRW |
|-------------------------------------|--------------|--------------|--------------|-------------------|---------------|--------------|--------------|--------------|--------------------|--------------|-----------------|
| Wheelbase (in.) | 140.8 | 140.8 | 164.8 | 140.8 | 164.8 | 188.8 | 200.8 | 140.8 | 164.8 | 188.8 | 200.8 |
| Cab-to-axle (in.) | 60 | 60 | 84 | 60 | 84 | 108 | 120 | 60 | 84 | 108 | 120 |
| Max. GVWR (lbs. | | | | | | | | | | | |
| 4x2 | | | | | | | | | 19,000 | | |
| 4x4 | | 13,000 | 13,000 | 16,000 | 16,000 | 16,000 | 16,000 | 17,950 | 19,000 | 17,950 | 19,00 |
| Max. payload (lbs | | 7200 | 7000 | 0500 | 0400 | 0200 | 0100 | 11 500 | 10 200 | 11 200 | 10.00 |
| 4x2 4x4 | 4800 4600 | 7300 6900 | 7200 6800 | 9500 9200 | 9400 9100 | 9300 9000 | 9100 8800 | | 12,300 12,000 | | 12,00 |
| 4x4 Overall length (in.) | | 225.6 | 249.6 | 225.6 | 249.6 | 273.6 | 285.6 | 225.6 | 249.6 | 273.6 | 285.6 |
| Top of cab to gro | | | | 220.0 | 240.0 | 270.0 | 200.0 | 220.0 | 240.0 | 270.0 | 200.0 |
| 4x2 | 76.9 | 77.1 | 76.9 | 80.6 | 80.5 | 80.5 | 80.2 | 81.7 | 81.4 | 81.4 | 81.1 |
| 4x4 | 81.6 | 80.0 | 80.2 | 80.7 | 80.5 | 80.0 | 80.0 | 81.7 | 81.2 | 81.1 | 80.7 |
| Top of frame to g | round at | end of fi | rame – E | mpty (ir | 1.) | | | | | | |
| 4x2 | 32.7 | 33.1 | 32.8 | 32.3 | 32.3 | 32.2 | 32.2 | 32.2 | 32.2 | 32.2 | 32.2 |
| 4x4 | 34.5 | 34.9 | 34.6 | 32.4 | 32.4 | 32.3 | 32.3 | 32.3 | 32.3 | 32.2 | 32.2 |
| Width between | 34.1 | 34.1 | 34.1 | 34.2 | 34.2 | 34.2 | 34.2 | 34.2 | 34.2 | 34.2 | 34.2 |
| frame rails (in.) | | | | | | | | | | | |
| Axle clearance (i | | 0.7 | 0.7 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 |
| 4x2 | 8.8 | 8.7 | 8.7 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 |
| 4x4 Front tread width | 9.3 | 8.7 | 8.7 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 | 8.0 |
| 4x2 | (111.) | 68.9 | 68.9 | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 |
| 4x4 | 68.3 | 69.0 | 69.0 | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 | 74.8 |
| Rear tire outside | | | 00.0 | 7 1.0 | 7 1.0 | 7 1.0 | 7 1.0 | 7 1.0 | 7 1.0 | 7 1.0 | 7 1.0 |
| 4x2 | 79.5 | 92.2 | 92.2 | 93.6 | 93.6 | 93.6 | 93.6 | 93.6 | 93.6 | 93.6 | 93.6 |
| 4x4 | 79.5 | 92.2 | 92.2 | 93.6 | 93.6 | 93.6 | 93.6 | 93.6 | 93.6 | 93.6 | 93.6 |
| SUPERCAB | | | F-35 | o srw | F-35 | 50 DRW | / F-4 | 150 DR | W F- | 550 DI | RW |
| Wheelbase (in.) | | | | 31.8 | | 161.8 | | 161.8 | | 161.8 | |
| Cab-to-axle (in.) | | | (| 30 | | 60 | | 60 | | 60 | |
| Max. GVWR (lbs. | | | |)/11,400 | | 3,000 | | 16,000 | | 17,950 | |
| Max. payload (lb | | 4x4 | | 700 | | 00/6400 | 91 | 00/880 | 0 11, | ,100/10, | |
| Overall length (in | | | | 16.6 | | 246.6 | | 246.6 | | 246.6 | |
| Top of cab to gro | una – Ei | mpty (in. | | 7.4 | | 77 / | | 00 E | | 01.5 | |
| 4x2 4x4 | | | | 7.4 1.5 | | 77.4 80.2 | | 80.5 80.5 | | 81.5 81.3 | |
| Top of frame to g | round at | end of f | | | | 00.2 | | 00.0 | | 01.0 | |
| 4x2 | iouna a | ond or n | | 2.3 | • | 32.8 | | 32.3 | | 32.3 | |
| 4x4 | | | | 4.2 | | 34.6 | | 32.3 | | 32.3 | |
| Width between fr | ame rail | s (in.) | | 4.1 | | 34.1 | | 34.2 | | 34.2 | |
| Axle clearance (i | | | 8.8 | 3/9.3 | | 8.7 | | 8.1 | | 8.1 | |
| Front tread width | (in.) 4x | 2/4x4 | 6 | 8.3 | 68 | .9/69.0 | | 74.8 | | 74.8 | |
| Rear tire outside | width (ir | 1.) | 7 | 9.5 | | 92.2 | | 93.6 | | 93.6 | |
| | | F-350 | | -350 | F-4 | | F-450 | | -550 | | 550 |
| CREW CAB | | SRW | | DRW | DR | | DRW | | DRW | | RW |
| Wheelbase (in.) | | 176.2 | | 176.2 | 176 | | 200.2 | l | 76.2 | | 00.2 |
| Cab-to-axle (in.) | | 60 | | 60 | 16.0 | | 84 | 1. | 7.050 | | 84 ,950 |
| Max. GVWR (lbs. Max. payload (lb | | 1,200/11 | | 13,000 00/6200 | 16,0 8900/ | | 16,000 | | 7,950 10/10,600 | | |
| 4x2/4x4 | 13.) | 4700/40 | 00 00 | 00/0200 | 0300/ | 0000 0 | 000/030 | 0 10,30 | 10,10,000 | 10,000 | <i>II</i> 10,30 |
| Overall length (in | 1) | 261.0 |) | 261.0 | 261 | 0 | 285.0 | 2 | 261.0 | 28 | 35.0 |
| Top of cab to gro | | | | | | | 200.0 | | | | |
| 4x2 | | 77.9 | | 77.9 | 80 | .8 | 80.8 | | 81.4 | 8 | 1.4 |
| 4x4 | | 81.8 | | 80.8 | 80 | .9 | 80.9 | | 81.3 | 8 | 1.3 |
| Top of frame to g | round at | end of fi | rame – E | mpty (in | • | | | | | | |
| 4x2 | | 32.1 | | 32.6 | 32 | | 32.1 | | 32.2 | | 2.1 |
| 4x4 | | 34.1 | | 34.4 | 32. | | 32.2 | | 32.2 | | 2.2 |
| Width between frai | | | ^ | 34.1 | 34 | | 34.2 | | 34.2 | | 4.2 |
| Axle clearance (in. | | + 8.8/9. | 3 | 8.7 | 8.0 | U | 8.0 | | 8.0 | 8 | 3.0 |
| Front tread width | (In.) | 68.3 | 60 | 3.9/69.0 | 74 | 0 | 7/ 0 | | 7/ 0 | 7 | 1 Q |
| | | 00.3 | 50 | 0.8016.0 | 74. | .O | 74.8 | | 74.8 | /4 | 4.8 |
| 4x2/4x4 Rear tire outside | width (ir | | | 92.2 | 93 | 6 | 93.6 | (| 93.6 | O. | 3.6 |

F-350/F-450/F-550 SUPER DUTY CHASSIS CAB SPECIFICATIONS

| POWER Model | TRAINS Engine | 4x4 Transfer Case Manual | 6-Speed Manual | TorqShift™ 5-Speed Automatic |
|--------------------|--------------------------------------|-----------------------------|-------------------|------------------------------------|
| F-350 ³ | 5.4L 3-Valve Triton SEFI V8 | 2-speed | • | 0 |
| F-350 ³ | 6.8L 3-Valve Triton SEFI V10 | 2-speed | 0 | 0 |
| F-350 | 6.0L Power Stroke V8 Turbo Diesel | 2-speed | 0 | 0 |
| F-450 | 6.8L 3-Valve Triton SEFI V10 | 2-speed | • | 0 |
| F-450 | 6.0L Power Stroke V8 Turbo Diesel | 2-speed | 0 | 0 |
| F-550 | 6.8L 3-Valve Triton SEFI V10 | 2-speed | 0 | • |
| F-550 | 6.0L Power Stroke V8 Turbo Diesel | 2-speed | 0 | 0 |

See your Ford Dealer for powertrain availability in California Emissions States.

BRAKES Type

| rront: | |
|-----------------------|---|
| Rotor diameter | 13.66" (F-350); 14.53" (F-450/F-550) |
| Lining area (sq. in.) | 34.9 (F-350); 55.6 (F-450/F-550) |
| Rear: | |
| Rotor diameter | 13.39" (F-350); 15.35" (F-450/F-550) |
| Lining area (sq. in.) | 38.2 (F-350); 55.6 (F-450/F-550) |
| FUEL CAPACITY | |
| Location/capacity | - Aft-of-rear-axle/40-gallon (standard) |
| | - Midship/19-gallon (optional in place of |
| | 40-gallon tank on DRW models; not available |

on 188.8"/200.2" wheelbase with gas engines) Midship/19-gallon (optional in addition to 40-gallon tank on DRW models with diesel

4-wheel disc (standard); 4-wheel ABS (standard)

engine; total 59-gallon capacity)

| STEERING | |
|---------------|---|
| Туре | Haltenberger linkage (4x2); cross-tie linkage (4x4) |
| Assist | Power |
| Overall ratio | 20.16:1 (F-350 4x2); 20.38:1 (F-350 4x4); |
| | 17.8:1 average (F-450/F-550) |

| SUSPENSION - FRONT | | | |
|------------------------|---|--|--|
| Туре | Twin-I-Beam (F-350 4x2); Twin-Coil Monobeam | | |
| | solid axle (F-450/F-550 4x2, all 4x4s) | | |
| Axle (rating @ ground) | 4850 lbs. (F-350 4x2); 6000 lbs. (F-350 4x4); | | |
| | 7000 lbs. (F-450/F-550) | | |
| Springs | Coil | | |
| Shock absorbers | 1 3/8" gas type | | |
| Stabilizer bar | Standard | | |
| SUSPENSION - REAR | | | |
| Туре | Solid axle | | |
| | | | |

| Type | Solid axle |
|------------------------|---|
| Axle (rating @ ground) | 7280 lbs. (F-350 SRW); 9750 lbs. (F-350 DRW); |
| | 12,000 lbs. (F-450); 13,660 lbs. (F-550) |
| Springs | Leaf |
| Shock absorbers | 1 3/8" gas type |
| Stabilizer bar | Standard |
| WHEELS | |
| T | 041 (-4 |

| Type | Steel (standard); aluminum (optional) |
|----------------------|---|
| Size | 17" DRW, 18" SRW (F-350); 19.5" (F-450/F-550) |
| Studs | 8 (F-350); 10 (F-450/F-550) |
| Bolt circle diameter | 6.7" (F-350 SRW); 7.87" (F-350 DRW); |
| | 8.85" (F-450/F-550) |

15 commtruck.ford.com Specifications

F-350/F-450/F-550 SUPER DUTY CHASSIS CAB **POWERTRAIN SPECIFICATIONS**

| Туре | 5.4L 3-Valve Triton TM V8 SOHC | 6.8L 3-Valve Triton V10 SOHC | 6.0L Power Stroke* V8 Turbo Diesel OHV (32-valve) |
|------------------------|---|------------------------------------|---|
| Fuel injection | Sequential Electronic | Sequential Electronic | Electro-hydraulic w/ |
| | | | Generation 2 fuel injection |
| Engine control system | Electronic | Electronic | Electronic |
| Induction system | Specially tuned | Specially tuned | Electronic Variable Response Turbocharger (EVRT™), |
| | | | intercooler |
| Battery | 12-volt; | 12-volt; | Dual 12-volt; |
| | 750-cca/78-amp | 750-cca/78-amp | 750-cca/78-amp |
| Alternator | 130-amp* | 130-amp* | 130-amp;* optional dual |
| | | | 260 amps (120/140 combined) |
| Cooling system | Pressurized series flow | Pressurized series flow | Pressurized series flow |
| Cylinders | 8 | 10 | 8 |
| Cylinder head material | Aluminum | Aluminum | Cast iron |
| Block material | Cast iron | Cast iron | Cast iron |
| Valve operation | Hydraulic roller | Hydraulic roller | Push rod/rocker arms |
| Camshaft drive | Variable cam timing | Silent chain | Gear |
| Bore | 3.55" | 3.55" | 3.74" |
| Stroke | 4.16" | 4.16" | 4.13" |
| Compression ratio | 9.8:1 | 9.2:1 | 18.0:1 |
| Horsepower (hp @ rpm) | 300 @ 5000 | 362 @ 4750 | 325 @ 3300 |
| Torque (lbft. @ rpm) | 365 @ 3750 | 457 @ 3250 | 570 @ 2000 |
| Recommended fuel | Unleaded | Unleaded | Diesel |

^{*}Cold performance at 80°F produces 130 amps. Actual output is temperature dependent.

BUSINESS PREFERRED NETWORK

Each of the select dealerships in our Business Preferred Network (BPN) is committed to providing quality commercial-oriented products and service, as well as special financing and billing arrangements, to businesses that rely on Ford products. As a BPN customer, your business vehicles receive priority service at your BPN dealership, to help get your vehicle back on the road quickly.





FINANCIAL SERVICES

Our commercial purchase plans offer attractive rates, negotiable terms and business-friendly options, while CommercialeasePlusSM and CommercialeasePlusSM offer a variety of package options to meet your leasing needs. Contact us at 1-877-234-FMCC (3622) or visit our Web site at fordcredit.com.



COLOR & TRIM

| | | Tan |
|---|---|--------------------------------|
| | | Medium Flint |
| | | XL/XLT/Lariat |
| | • | Oxford White |
| • | | Arizona Beige Metallic |
| • | • | Red |
| • | • | Dark Toreador Red Metallic |
| • | • | Dark Green Satin Metallic |
| • | • | Medium Wedgewood Blue Metallic |
| • | • | True Blue Metallic |
| | • | Silver Metallic |
| | • | Dark Shadow Grey Metallic |
| • | | Dark Stone Metallic |
| • | • | Black |



Tan Cloth

Tan Cloth/Vinyl Weave

Tan Premium Cloth

Tan Leather


















EXTERIOR COLORS







Arizona Beige Metallic















Dark Stone Metallic



Black

EXTENDED For a purchase or lease, the Ford Extended Service Plan (ESP) gives you Ford SERVICE PLAN "Peace-of-Mind" protection designed to cover key vehicle components and protect you from the cost of unexpected repairs. Ask your dealer for an ESP backed by Ford Motor Company and honored at all Ford dealerships.

New Vehicle Limited Warranty

Under this warranty, you receive bumper-to-bumper coverage for 3 years/36,000 miles with no deductible. You also receive corrosion perforation coverage for 5 years with unlimited mileage and no deductible. Ask your Ford Dealer for a copy of the warranty.

17 Specifications commtruck.ford.com

