

LittleMax



SIZE MATTERS!

...YOUR EYES WON'T BELIEVE YOUR EARS!



**SIZE
MATTERS!**

LittleMax 1

Room always matters in the Pro-Audio business, which is especially true when it comes to transportation. Here, the lack of space can easily turn into a serious problem.

By providing all the necessary electronics and without compromising a truly superb sound, DYNACORD's powered mixers – the PowerMates – are the ideal solution for any space related or handling problems.

The new LittleMax systems add to this concept by offering excellent sound quality at an ultra-compact size.



THE SYSTEM COMPONENTS

The LittleMax1 system sets new standards in technical achievement for the 2 x 300-watts-class. Therefore, the LittleMax1 perfectly suits the PowerMate 600.



LM 8-2

The top-cabinet LM 8-2 is equipped with an 8" woofer and a powerful horn-driver combination. For smaller sound reinforcement purposes, it can also be used without a sub woofer making it a stand alone full range system. Also the enclosure is slanted on one side, which allows the cabinet to be used as a monitor speaker.



LM 10-1

The LM 10-1 10" sub woofer's low-frequency response and unparalleled dynamic range is truly amazing. So far, nobody would have anticipated these features from a system of such compact dimensions. When used together, the LM 8-2 and the LM 10-1 are simply operated parallel, without additional electronics. The system-pack includes Speakon cables and stand poles.

LittleMax2



2 X LM 10-2

2 X LM12-1

4 X SPEAKON SYSTEM CABLES

2 X SPEAKER STAND POLES

The performance of the Little Max2 system convinces even the strongest critics of compact loudspeaker systems. With regard to sound quality, sound pressure level, coverage, and dispersion, the LittleMax systems exceed all expectations.

Speakon loudspeaker cables and stand poles are supplied with both systems.

LittleMax – two solutions from DYNACORD for improved sound with less problems in handling the gear ...

Being the ideal complement to the PowerMates 1000 and 1600, the LittleMax2 system is a true multi-talent in sound reinforcement applications offering a power handling capacity of 2 x 500 watts, which is plenty even for events with an audience of 300 people and more.



LM 10-2

The LM 10-2 full range cabinet employs a 10" woofer and an Electro-Voice DH2010A/HPT94 HF-horn/driver combination. Also the enclosure is slanted on one side, which allows the cabinet to be used as a monitor speaker.



LM 12-1

The LM 12-1 sub woofer is equipped with an Electro-Voice DL12SX, offering a power handling capacity of 300 watts. All system components are protected against thermal overload.

LittleMax 1

- 2 x LM8-2 8" full range cabinets
- 2 x LM10-1 10" sub woofers
- 2 x PSS 404 Speakon system cables 4 m
- 2 x PSS 408 Speakon system cables 8 m
- 2 x PCL 880 speaker stand poles

LittleMax 2

- 2 x LM10-2 10" full range cabinets
- 2 x LM12-1 12" sub woofers
- 2 x PSS 404 Speakon system cables 4 m
- 2 x PSS 408 Speakon system cables 8 m
- 2 x PCL 880 speaker stand poles



LM10-1



LM8-2



LM12-1




LM10-2

Technical Specifications

Type:	LM8-2	LM10-2	LM10-1	LM12-1
Design:	2-Way	2-Way	Subwoofer	Subwoofer
Components:	LO: 1 x 8" Dynacord 357794	1 x 10" EV DH2010A	1 x 10" Dynacord 357793	1 x 12" EV DL12SX
	HI: Dynacord HFT3008	HPT94 Horn	-	-
Nominal power rating RMS:	150 W	200 W	200 W	300 W
Program power capacity:	300 W	400 W	400 W	600 W
Frequency response (-10 dB):	80 Hz-18 kHz	80 Hz-20 kHz	80 Hz-250 Hz	70 Hz - 280 Hz
Nominal SPL (1W/1m):	95 dB	97 dB	97 dB	98 dB
Max. SPL*:	120 dB	123 dB	123 dB	126 dB
Impedance:	8 Ω	8 Ω	8 Ω	8 Ω
Crossover frequencies:	7 kHz	7 kHz	150 Hz	150 Hz
Dimensions:				
Width:	250 mm	297 mm	297 mm	357 mm
Height:	425 mm	457 mm	425 mm	495 mm
Depth:	280 mm	280 mm	280 mm	280 mm
Weight:	11.0 kg	14.0 kg	13.5 kg	17.0 kg

* calculated with program power

Frequency Response
LittleMax 1

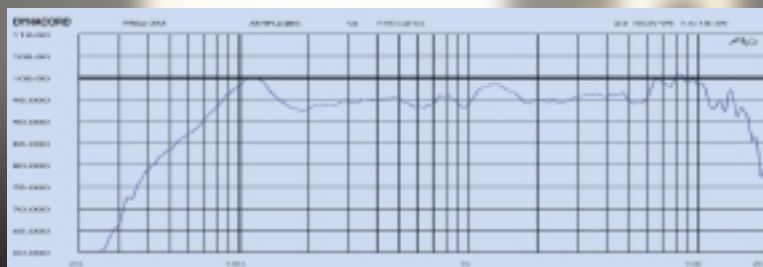

Frequency Response
LittleMax 2

