


# Rim Owners Manual



**Model Number:**

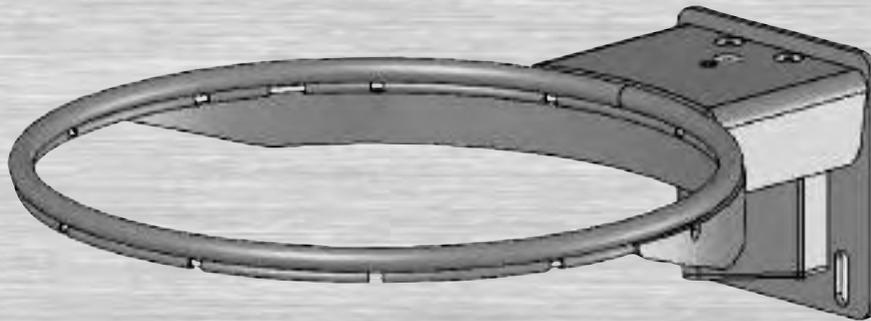

**! WARNING!**

READ AND UNDERSTAND  
OPERATOR'S MANUAL  
BEFORE USING THIS UNIT.

FAILURE TO FOLLOW  
OPERATING INSTRUCTIONS  
COULD RESULT IN INJURY  
OR DAMAGE TO PROPERTY.

Customer Service Center  
• 200 American Avenue • Jefferson, IA 50129  
[www.spalding.com](http://www.spalding.com) • [www.basketballproducts.com](http://www.basketballproducts.com) • [www.hydra-rib.com](http://www.hydra-rib.com)

## REQUIRED TOOLS AND MATERIALS:



- (2) Stepladders 8 ft. (2.4 m)



- (1) Allen Wrench (5/16")
- (1) Allen Wrench (1/4")



- (1) Carpenter's Level




- (1) Phillips-Head Screwdriver



- (2 each) 9/16" Wrenches and/or Socket Wrenches and Sockets




- (Deep-Well Sockets 9/16" are Recommended).

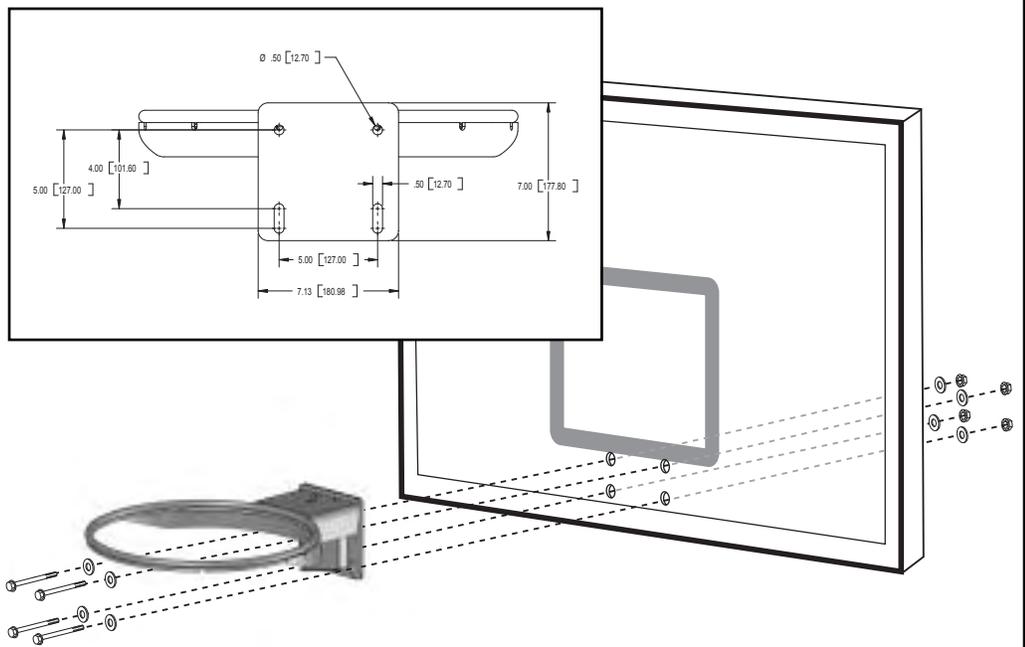


## TO ADJUST TENSION

Remove the rim cover from the rim and make adjustments as shown.

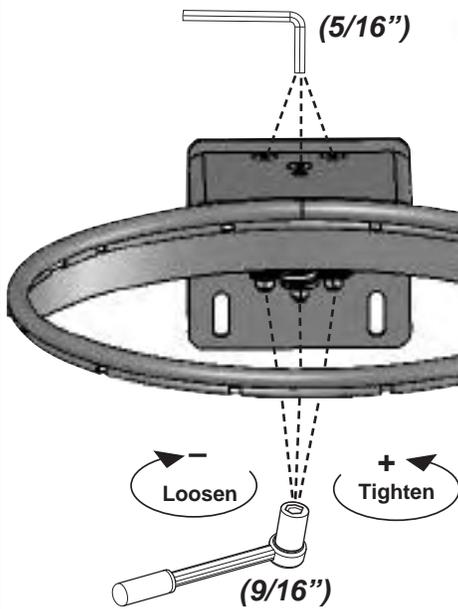

## TO LEVEL RIM

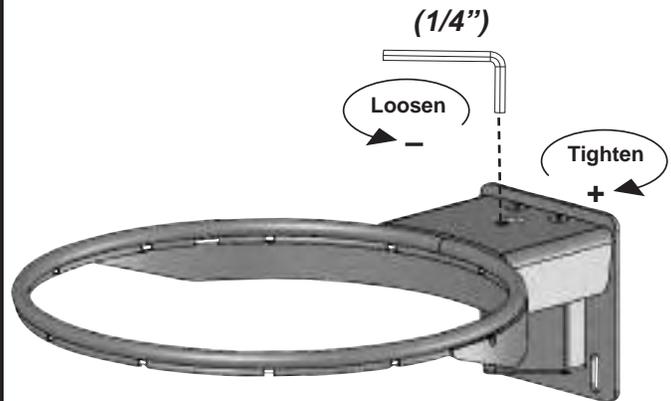

## INSTALL NET

- Remove nylon net-holder from the rim.
- Reinstall while inserting all net loops into slots along ring as shown.

