

AirKing[®]

Ventilation Products

SPECIFICATIONS

AKF100LS

EXHAUST FANS

100 CFM/1.5 SONES @ 0.10" WG.
HVI CERTIFIED 120 Volts, 0.85 amps, 60 Hz.

- **Grill**

White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 11" x 13³/₄". Moonstone glass lens.

- **Blower Wheel**

Balanced polymeric dual inlet blower wheel 5¹/₄" dia. x 2²⁷/₃₂" depth, 30 paddles, secured in place via press fit.

- **Motor**

Enclosed 4 pole electronically balanced permanently split capacitor motor (PSC); life time lubricated, suitable for continuous operation. Motor bearings - ball. Rated 115/120 volts, 60 Hz, 0.35 amps.

- **Fan Housing**

23 gauge galvanized steel housing. Overall dimensions 10⁷/₈" x 9³/₈" x 7⁷/₈".

- **Duct Collar**


4" round, zinc plated metal collar adapter. 4" spring loaded aluminum backdraft damper.

- **Ventilating Area**

For bathrooms up to 100 sq. ft. For other rooms up to 125 sq. ft.

- **Electrical Connections**

1/2" electrical knockouts provided. Easy wiring access via either internal or external wiring compartment cover.

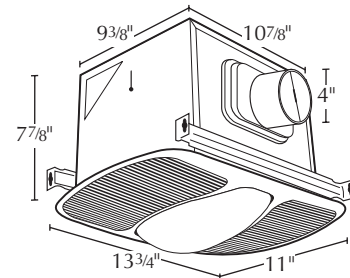

CUL/HVI

Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.

- **Lighting**

Electronic Quick Start Ballast – rated 26 Watt – Use Triple 4 pin PL lamp. Maximum 26 Watt.

- **Unit Mounting**

The housing will mount in ceilings with at least 8" of clearance and through drywall thickness up to 3/4", with a rough-in opening of 11¹/₈" x 9⁵/₈". Rated for ceilings insulated to R-40. The housing will mount either between 16" or 24" on center joists, using the 4 supplied housing mounting rails. The housing mounting rails can be adapted for overhead mounting (hardware not provided).

- **Single Pack Shipping Info**

Box Dim Box Dim: 14¹/₈" x 11⁵/₈" x 12"
 UPC: 0-8316221000-5
 Shipping Weight: 11.5 lbs.

PERFORMANCE

	Static Pressure (inches of w.g.)								HVI Sones @ .1 SP	Fan Speed RPM	Power Watts
	0	0.05	0.1	0.125	0.15	0.2	0.25	0.3			
Air Flow - CFM	104	102	100	99	98	95	90	71	1.5	1106	29

PROJECT							ARCHITECT				
LOCATION							ENGINEER				
CONTRACTOR							SUBMITTED BY			DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS		



U.S.: 820 Lincoln Drive
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada: 110 Glidden Road
 Brampton, Ontario L6T 2J3
 Tel: (905) 456-2033
 Fax: (905) 456-1015