

# COOPER LIGHTING - METALUX®



## BI/BIU SERIES

2', 3' or 4'  
1 or 2 Lamps


### STEEL WALL BRACKET

- Equipped with energy saving ballasts/complies with federal energy efficiency standards
- Low profile design
- Die formed, steel housing
- Baked white enamel finish
- Down or combination up/downlight
- Injection molded diffuser/end plate
- Refractor slides forward for easy installation and maintenance
- Easy wiring access
- Convenience outlet and switching available, see Options page
- UL/CUL Listed. Suitable for damp locations.

### DESCRIPTION

The BI Series meets the need for a very low brightness wall bracket. This specification grade wall bracket with an injection molded refractor produces effective up, down or combination lighting. This energy efficient luminaire offers up lighting, multi-level switching and convenience outlets as options. These design features ensure that the BI Series will provide ease of use and comfort. The BI Series features specification efficiency in a low profile wall bracket. The Series is an excellent choice for dressing rooms, lavatories, hospital and nursing homes, stairways and task lighting.


### DIMENSIONS

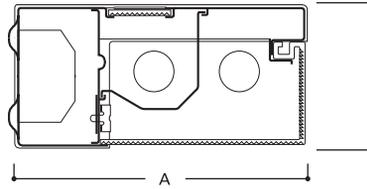

NOMINAL LENGTH	A	B
2', 3', 4'	7-1/2" (190mm)	3-1/2" (89mm)

### ORDERING INFORMATION

SAMPLE NUMBER: BI-232-120V-EB81-U

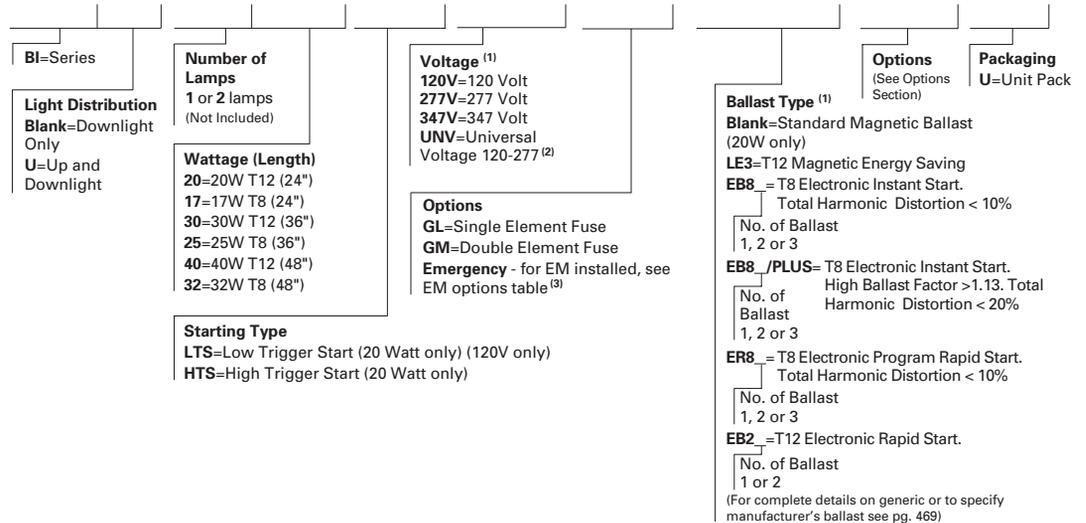

NOTES: (1)Products also available in non-US voltages and frequencies for international markets. (2)Not available when specifying emergencies, voltage must be specific. (3)Non available for 2' version.

For complete product data, reference the Fluorescent Specification binder. Specifications & dimensions subject to change without notice. Consult your Cooper Lighting Representative for availability and ordering information.