

DESCRIPTION

LIGHT FIXTURE:

- Corrosion resistant finish
Satin nickel finish (Model 742SNNT)
Painted white finish (Model 742WHNT)
Oil-rubbed bronze finish (Model 742RBNT)
- Frosted melon glass shade
- Close mount design
- Uses two 60 Watt maximum, type A, medium base bulbs. Bulbs not included.
- Vent openings in fixture base for exhaust fan
- Light fixture assembly is plug-in and removable

BLOWER:

- Plug-in permanently lubricated motor
- Polymeric blower wheel

HOUSING:

- Rugged, 26-gage galvanized steel construction
- Sturdy key-holed mounting brackets for quick, accurate installation
- Tapered, polymeric duct fitting with built-in backdraft damper for easy, positive duct connection and no metallic clatter

NOTE: For installation in ceilings up to 12/12 pitch.


U.L. Listed for use in insulated ceilings (Type I.C.)

Use supply wiring rated for at least 90° C



Decorative Light / Fans

**MODELS 742SNNT
742WHNT
742RBNT**

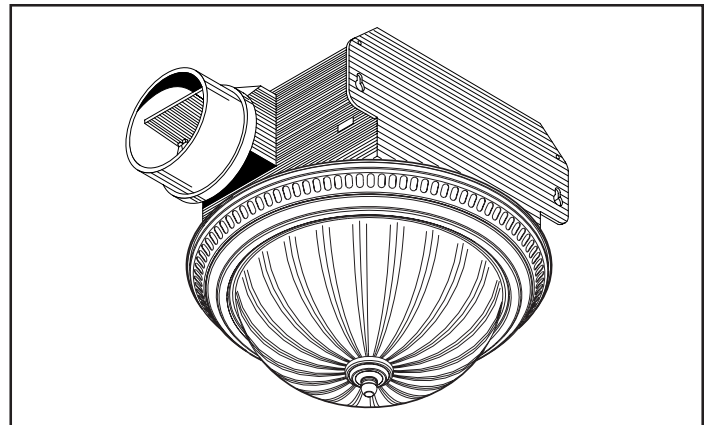


SPECIFICATIONS

VOLTS	AMPS	CFM	SONES	DUCT
120	1.6	70	2.0	4" Round



HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers.

Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

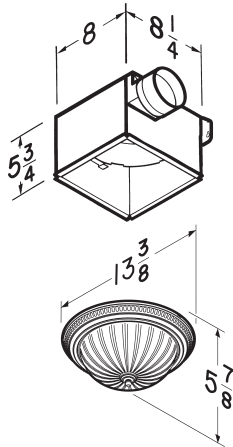

INSTALLATION

Complete installation instructions are included with each Decorative Light / Fan.

ARCHITECT'S SPECIFICATION

- Decorative Light / Fan shall be NuTone Model 742SNNT (742WHNT), (742RBNT) as manufactured by NuTone according to specifications listed:
- Unit shall have galvanized steel housing with dual integral mounting brackets. It shall be ducted to a roof or wall cap.
- Blower assembly shall be removable and have a permanently lubricated motor.
- Light fixture assembly shall be plug-in, removable and include a frosted melon glass shade and a corrosion-resistant base with satin nickel (Model 742SNNT), or painted white (Model 742WHNT) finish, or oil-rubbed bronze finish (Model 742RBNT).
- Lamps shall be two 60 Watt maximum, type A, medium base, incandescent.
- Air delivery to be no less than 70 cfm and sound level no greater than 2.0 sones. Air and sound ratings shall be certified by HVI.
- Unit shall be U.L. Listed for use in insulated ceilings (Type I.C.)

NuTone, Inc., 4820 Red Bank Road, Cincinnati, OH 45227 (1-888-543-8687)

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date