

# COOPER LIGHTING - SURE-LITES®

Catalog #		Type
Project		
Comments		Date
Prepared by		

## SPECIFICATION FEATURES

### CU1R

#### Electrical

- 6V DC Input Voltage

### CU1R

#### Construction

- Matches CU1 Series emergency lighting units
- For use with CU1HD emergency lighting unit or 6V DC Class 2 circuit
- Clear acrylic dome provides distortion free lighting
- Available with polycarbonate dome - add PCL suffix to Catalog Number
- Lamp adjusts 180° vertically and 180° horizontally with 358° rotation
- Serrated washer and locking collar provide positive lamp aiming
- Mounting plate provided for wall or ceiling mounting
- Use with WG-8 Wire Guard

### CU1R

#### Code Compliance

- CSA Certified
- UL Listed
- Life Safety NFPA 101

### CU1R

#### Warranty

- Unit: 1-year

### CU1R

#### Lamp Data

- 6 Volt Incandescent Wedge Base
- Consult factory for other lamp types (See Technical Information Section)



## CU-1-R SERIES

ROUND SPECIALTY  
REMOTES  
CSA Certified  
Emergency Lighting

## ORDERING INFORMATION

### CU1R Series

Catalog No.	Finish	Lamp Type	Volts	Watts	Lamp No.	Isofootcandle Diagram No.
CU1R	White	Incandescent Wedge Base	6	5.4	029-121	12
CU1RB	Black	Incandescent Wedge Base	6	5.4	029-121	12

Alternate Lamps: Consult Cooper Lighting Representative  
Other Finishes Available: Cooper Lighting Representative

TOTALLY PREDICTABLE  
**RELIABILITY**

### ENERGY DATA

Power Consumption is equal to lamp wattage.

PHOTOMETRICS

Horizontal Distribution

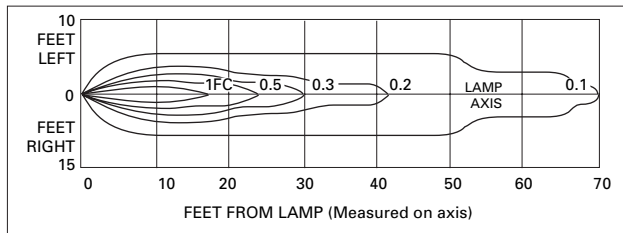


Diagram No. 12 Lamp No. 029-121 @ 75 Initial Lumens

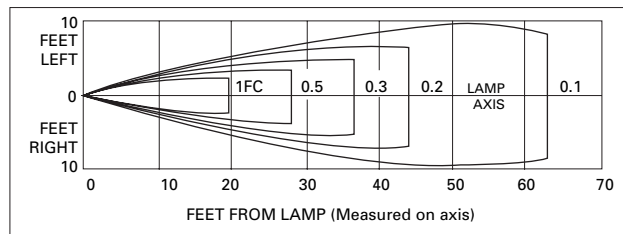


Diagram No. 3 Lamp No. 029-03 @ 108 Initial Lumens

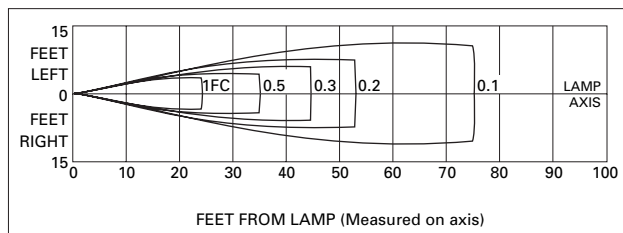


Diagram No. 6 Lamp No. 029-16 @ 155 Initial Lumens

Vertical Distribution

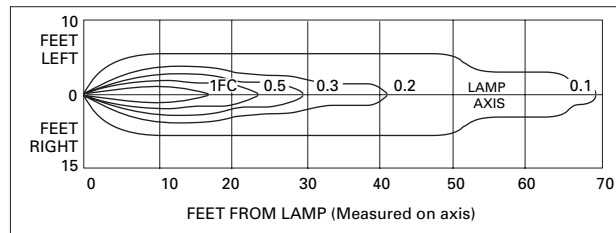


Diagram No. 12 Lamp No. 029-121

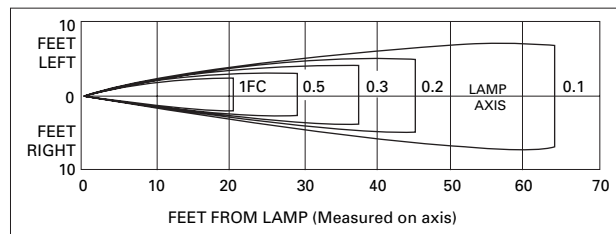


Diagram No. 3 Lamp No. 029-03

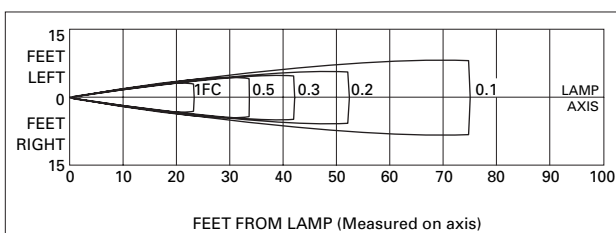


Diagram No. 6 Lamp No. 029-16