

ENFORCER[®]

VIDEO


RS-232 to RS-485 Converter

EVA-RS1

Range: 3/4 Mile (1,200 Meters)


Features:

- ▶ 9-pin DB-9 female connector for RS-232 to 2-wire removable Terminal Block for RS-485.
- ▶ Two wire, differential signals, half duplex.
- ▶ No external power supply required. Port powered.
- ▶ Auto-switching baud rate, speed up to 115,200 baud (115.2 kbps) over a distance of 1200 meters.
- ▶ Up to 32 devices may be connected together in RS-485 multipoint operation.
- ▶ No software needed. Automatic send data control.
- ▶ Removable terminal block for ease of installation and trouble shooting.

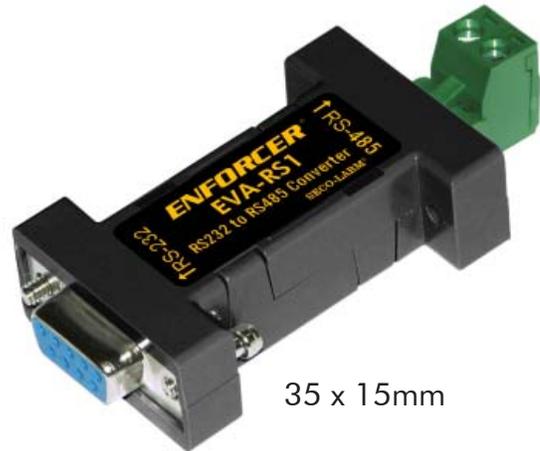


35 x 15mm

Sample Installation:

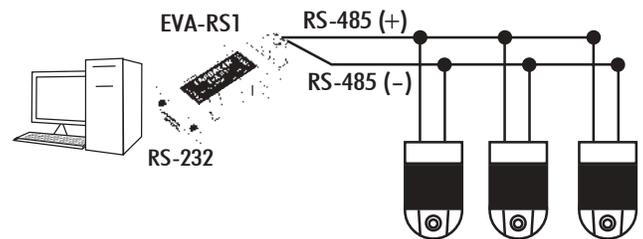

Dimensions:

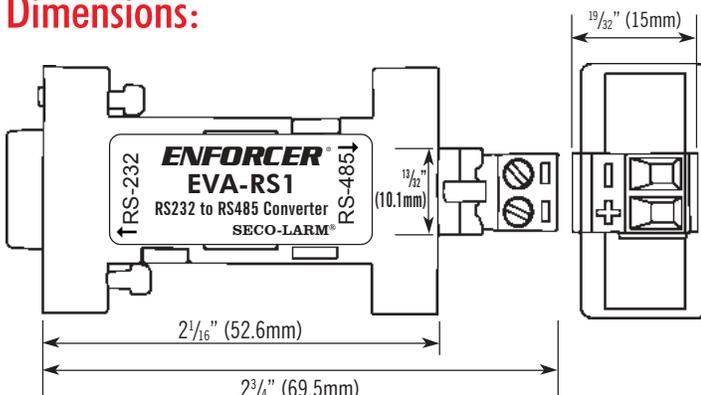

Specifications:

Input	RS-232, DB9
Output	RS-485, Removable terminal block
Current consumption	10mA (max)
Transmission range	3,700 ft. / 1200 meters
Connector	32
Power	No power required, port powered
Storage temperature	-22° ~ 158°F (-30° ~ 70°C)
Operating temperature	14° ~ 113°F (-10° ~ 45°C)
Dimensions - W x H x D mm	2 7/8 x 1 5/16 x 5 7/8" (73x33x17mm)

Balunsf.pmd

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM[®] U.S.A., Inc.,
Tel: 1-949-261-2999 (California & International)

16842 Millikan Avenue, Irvine, CA 92606
Fax: 1-949-261-7326

Tel: 1-800-662-0800 (Domestic U.S. & Canada)
Email: info@seco-larm.com Website: www.seco-larm.com