


JF-DVF-HID-I

Vandal Resistant Color Video Door Station
With Built in HID *iClass*™ Smart Card Reader

- INSTRUCTIONS-

The JF-DVF-HID-I is a JF-series color video door station and an HID *iClass*™ Card Reader, built onto the same stainless steel faceplate. The card reader provides electronic access to a building through a separate Access Control System, which is not supplied by Aiphone.

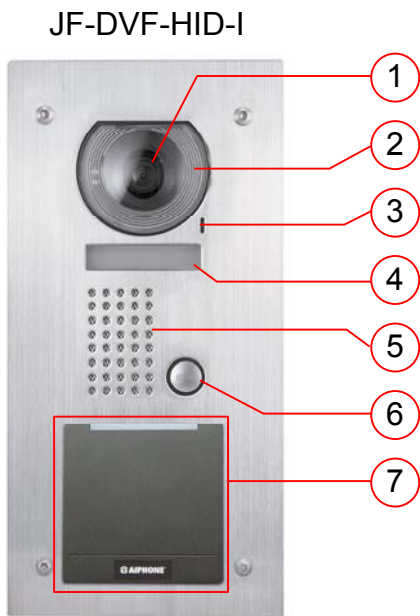


NAMES & FUNCTIONS:

- | | |
|-----------------|------------------|
| 1. Camera | 5. Speaker |
| 2. LED Light | 6. Call button |
| 3. Microphone | 7. iClass Reader |
| 4. Name Placard | |

FEATURES:

- All-in-one solution-Communication product & card reader
- If a card is missing or malfunctioning, audio/video communication can provide user verification
- Standard Wiegand output to access panel
- Convenience of installing combined components

PACKAGE CONTENTS:

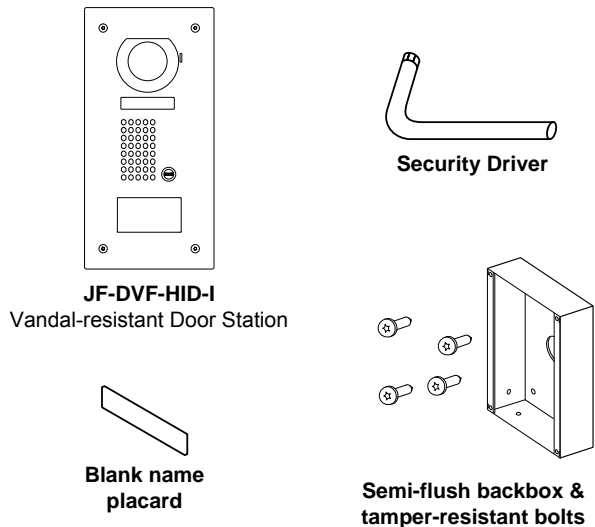


OPTIONAL ACCESSORIES:

- **SBX-DVF-P** - Surface-mount stainless steel backbox
- **SBX-LSP** - Stainless steel security lock box

INSTALLATION:

1. For flush mounting, cut hole in wall and use supplied back box.
Box dimensions are 4-1/2"W x 10-3/8"H x 1-3/4"D.
2. For surface mounting, use the SBX-DVF-P surface mount box.
This box can mount to a standard 1-gang box or to any flat surface.

WIRING DIAGRAM:

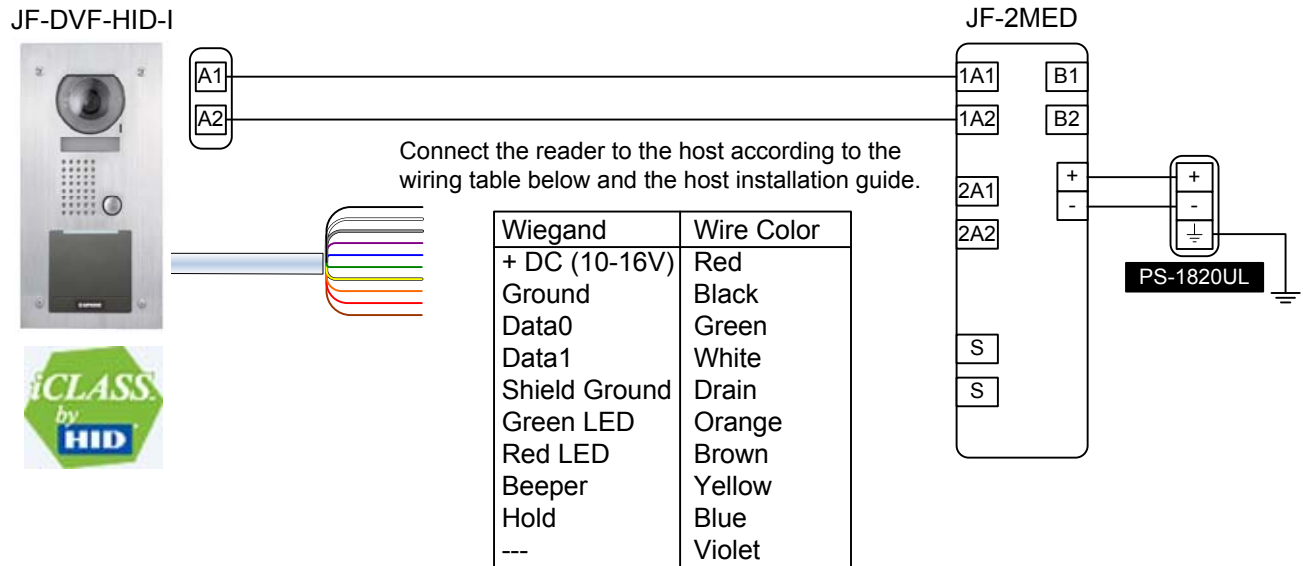

TESTING AND OPERATION:

- When power is applied to the *iClass*[™] reader, the LED will turn RED while the beeper beeps simultaneously 3 times. (The last tone is a higher frequency). The LED will then flash once after the last tone. This indicates that the microcontroller is operating properly.
- Present an *iClass* ID card to the reader (Hold the card directly in front of reader). The LED will momentarily turn green while the beeper beeps once, indicating that the card was read successfully.

SPECIFICATIONS:

CARD READER:

Power Source: 10 ~ 16V DC (linear recommended)
 Current Requirements: 80mA (Avg); 300mA (peak)
 @ 12V DC
 Transmit Frequency: 13.56 MHz
 Terminations: Color-coded pre-wired pigtails
 Wiring Distance: 500'
 Operating Temperature: -10°~60°C / 14°~140°F
 Operating Humidity: 5-95% relative humidity
 non-condensing

CAMERA:

Camera unit: CCD Camera
 Scanning line: 525 lines
 Min. illumination: 5 Lux at 1' or less
 Terminations: Screw terminals
 Wiring Distance: 330' w/871802 wire
 980' w/JBW-BA & 851602 wire
 Dimensions (camera): 5-3/4" W x 11-5/8" H x 1-5/16" D
 With SBX-DVF-P: 5-15/16" W x 11-3/4" H x 2-13/16" D (Top)
 1-15/16" D (Bottom)

FCC WARNING:

This device complies with Part 15 of the FCC rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference that may cause undesired operation.
 - For proper regulatory compliance, the drain wire should be disconnected at the power supply end of the cable.
 - Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
 - The Reader is intended to be powered from a limited power source output of a previously certified power supply.

Aiphone Communication Systems
 1700 130th Ave. N.E.
 Bellevue, WA 98005
 (425) 455-0510
 FAX (425) 455-0071

TOLL FREE TECHNICAL SUPPORT:
 (800) 692-0200
 E-MAIL: tech@aihone.com

Page 2
 JF-DVF-HID-I Instr.
 0810JD