

Bush Hog® TOUGH 3209 Series Rotary Cutters

BUSH HOG® TOUGH FEATURES

TOUGH 10 Gauge Deck Construction


TOUGH 7 Gauge Strongbacks

TOUGH 1/4 Inch Sidebands

TOUGH Rubber Cushioned Axle Arms

TOUGH 5 Year Gearbox Limited Warranty

TOUGH Powder Coat Paint

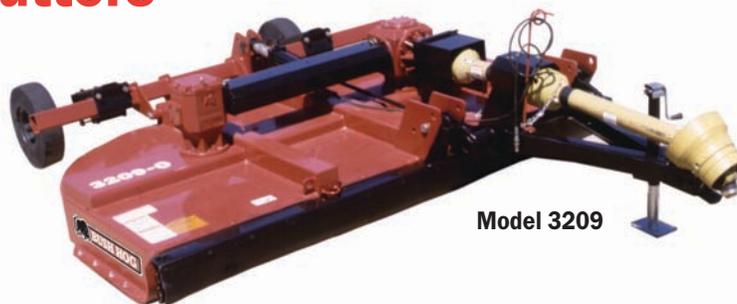

MODELS	3209	3209 Offset
Cutting Width	9 ft	9 ft
Cutting Capacity	2 1/2 inch diameter	2 1/2 inch diameter
Offset Beyond Tractor Center Line (Offset Models Only)	N/A	6 ft 9 inches
Dimensions (width x length)	9 ft 7 inches x 9 ft 9 inches (Lift)	9 ft 7 inches x 9 ft 9 inches (Lift)
Transport Width	9 ft 5 inches	9 ft 5 inches
Type Hitch	3-Pt. Category II & III Standard and Quick Hitch, Cat. II & III Semi-Mount and Center Pull (self leveling)	3-Pt. Category II & III Semi-Mount and Pull Type (self leveling)
Cutting Height	2 to 13 inches	2 to 13 inches
Deck Thickness	10 gauge	10 gauge
Side Bands	1/4 x 10 inches	1/4 x 10 inches
Minimum Tractor HP	50 PTO (Lift), 40 PTO (Pull / Semi)	45 PTO (Semi), 40 PTO (Pull)
Driveline	ASAE Cat. 5 (540 RPM - Lift, Pull and Semi-Mount), ASAE Cat. 4	ASAE Cat. 5 (540 RPM - Pull and Semi-Mount)
Cross Shaft	ASAE Cat. 4 Rubber Element	ASAE Cat. 5 Rubber Element
Gearbox HP	(3) 205 Center, 190 Outboards	(2) 205 Main, 190 Outboard
Tractor PTO Speed	540 RPM	540 RPM
Driveline Protection	4 Plate PTO Slip Clutch	4 Plate PTO Slip Clutch
Height Adjustment	Manual or Hydraulic	Manual or Hydraulic
Blade Holder(s)	Round	Round
Blades	1/2 x 4 inches - Uplift	1/2 x 4 inches - Uplift
Blade Tip Speed	15,176 FPM	15,176 FPM
Tires	Laminated, Pneumatic, Aircraft	Laminated, Pneumatic, Aircraft
Axles	Choice of Single or Dual Axles for Pull Models	
Deflectors	Front Belting, Rear Band, Optional Chains	Front Belting, Rear Band, Optional Chains
Safety Tow Chain	Standard for Pull Models	Standard for Pull Models
Approximate Weight (Pull with Single Axle)	2594 lbs	2497 lbs
Options	Chain Shielding, Third Tailwheel for Lift or Semi-Mount Models	
Warranty	1 year limited warranty with a 5 year gearbox limited warranty	

FEATURES

- High blade tip speeds • Deep sidebands

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE