

EP719

# The Ultra Bright Powerhouse




## Brilliant Performance, Brilliant Price

The Optoma EP719 is an award-winning, versatile and portable multimedia projector. From the boardroom to the classroom, the EP719 features 2000 lumens, sharp resolution and great contrast for a variety of environments. Designed for today's demanding multimedia needs, this robust DLP® digital projector lets your presentations shine.

- Native 1024 x 768 XGA resolution displays sharp images
- 2000 lumens for bright pictures in a wide range of environments
- 2500:1 contrast ratio for superior image quality and crisp details
- SXGA+ (1400 x 1050) resolution and HDTV compatibility
- Advanced connectivity including DVI-I w/HDCP, component, composite and S-video inputs
- Lightweight at only 4.4 pounds

## Cutting-edge DLP® Technology

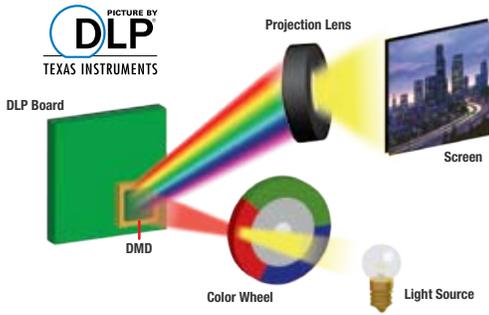

## Enhanced Ventilation System



## Remote Control



## I/O Ports



## Specifications

<b>Display Technology:</b>	0.55" DDR DLP® Technology by Texas Instruments
<b>Resolution:</b>	Native XGA (1024 x 768)
<b>Maximum Resolution:</b>	PC: SXGA+ (1400 x 1050) Resize
<b>Brightness (Typical):</b>	2000 Lumens
<b>Contrast Ratio (Full On/Full Off):</b>	2500:1
<b>Lamp Life (STD/ECO):</b>	2,000 Hours/3,000 Hours
<b>Throw Ratio (Distance/Width):</b>	1.93-2.13:1
<b>Image Size (Diagonal):</b>	24.6" to 300" (0.6 to 7.62 m)
<b>Noise Level (STD/ECO):</b>	32dB/28dB
<b>Remote Control:</b>	IR Remote Control w/Mouse
<b>HDTV Compatibility:</b>	720p, 1080i
<b>Monitor Loop Through:</b>	D-Sub 15 VGA Output (Functional in Both Normal and Standby Modes)
<b>Lamp Type:</b>	200W UHP
<b>Projection Distance:</b>	3.9' to 32.8' (1.2 to 10 m)
<b>Computer Compatibility:</b>	XGA, SVGA, VGA, VESA, PC & Macintosh Compatible, SXGA + Resized
<b>Video Compatibility:</b>	NTSC/PAL/SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i)
<b>Aspect Ratio:</b>	4:3 Native, 16:9 Compatible
<b>Projection Lens:</b>	F = 2.7-3.0, f = 21.83 - 23.81 mm, 1.2:1 Manual Zoom and Focus
<b>Audio:</b>	One 2-Watt Speaker
<b>Keystone Correction:</b>	+/- 15° Vertical
<b>Horizontal Scan Rate:</b>	15 to 100 kHz
<b>Vertical Refresh Rate:</b>	56 to 85 Hz
<b>Power Supply:</b>	AC Input 100 - 240 V, Auto-Switching Power Supply
<b>Power Consumption:</b>	265 Watts (Maximum), <15 Watts (Standby Power)
<b>Operating Temperature:</b>	41-95° F (5-35° C) (80% Humidity), Adjustable Fan Speed for High Altitude Application
<b>Displayable Colors:</b>	16.7 Million
<b>Projection Method:</b>	Front, Rear, Ceiling Mount, Table Top
<b>Uniformity:</b>	85%
<b>User Controls:</b>	Complete On Screen Menu Adjustments in 11 Languages
<b>I/O Connectors:</b>	DVI-I w/ HDCP, D-Sub 15, VGA for Monitor Loop Through, S-Video, Composite Video, Audio Mini-Jack, RS-232
<b>Standard Accessories:</b>	AC Power Cord, VGA to VGA, Composite Video, Remote Control, Batteries for Remote, Lens Cap, Quick Start Guide, Warranty Card and User's Manual
<b>Optional Accessories:</b>	Ceiling Mount, VGA to Component, S-Video Cable, Audio Out Adapter, Gold Service Warranty and GrayWolf™ Series Screens
<b>Weight:</b>	4.4 lbs (2.0 kg)
<b>Dimensions (W x H x D):</b>	9" x 3.7" x 8.26" (230 x 95 x 210 mm)
<b>Warranty:</b>	2 Years Limited Parts and Labor, 90 Days Lamp
<b>UPC:</b>	796435 11 607 1



Available from:

