MODEL H7528
RESAW FENCE FOR
G0531/G0566/G0568/G0569
INSTRUCTION SHEET

Introduction

The Model H7528 Resaw Fence upgrades the standard fence that came with the G0566/G0568. Installing the resaw fence on your old fence requires that you drill a hole in your old fence.

Inventory (**Figure 1**)

A. Resaw Fence 1
B. Adjustment Handle 1
C. Flat Washer 8mm 1
D. Moving Plate.. 1
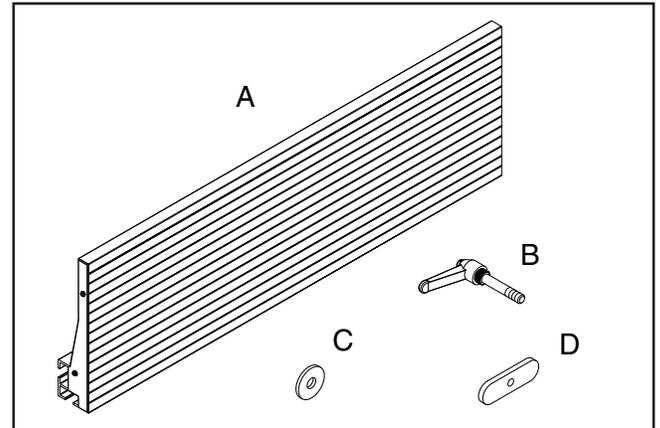
Drilling the Hole

Before starting, you should have a pencil, a measuring tape, a center punch, a hammer, a 3/8" drill bit, and access to a drill press (a hand drill will also work, but results may vary).

To drill the hole in your fence:

1. Measure the center-point of the hole (see **Figure 2**) and pencil it in on the face of the fence.

2. Use the center punch and hammer to indent the center-point on your penciled mark.

3. Observe all safety precautions given for your drilling method (refer to your Owner's Manual), and drill the hole completely through your fence.
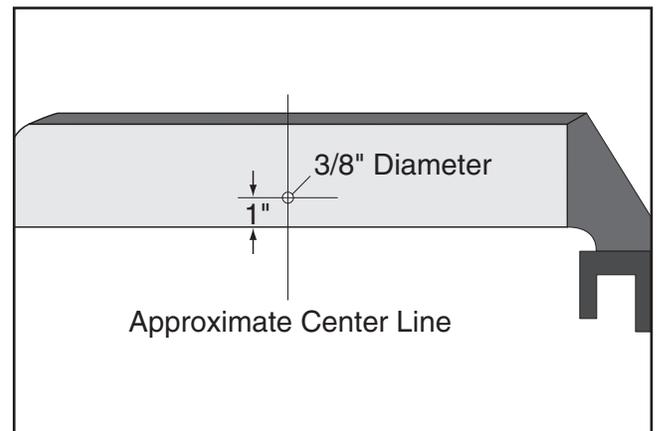
Assembling Fence

1. Insert the adjustment handle with washer through the hole in the fence and attach the moving plate on the other side of the fence (**Figure 3**).

2. Slide the resaw fence over the moving plate, center it with your original fence, and lock it in position with the adjustment handle.

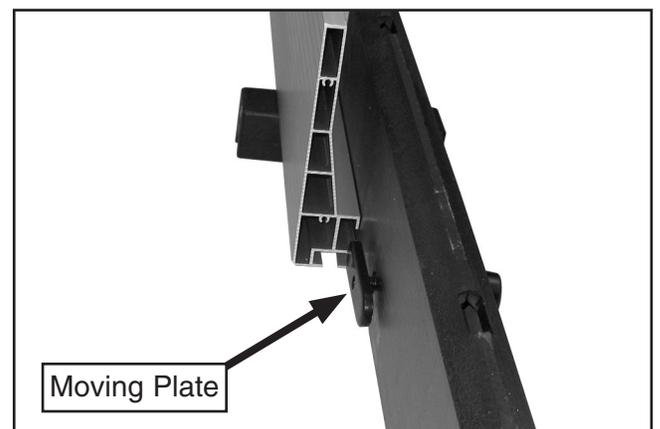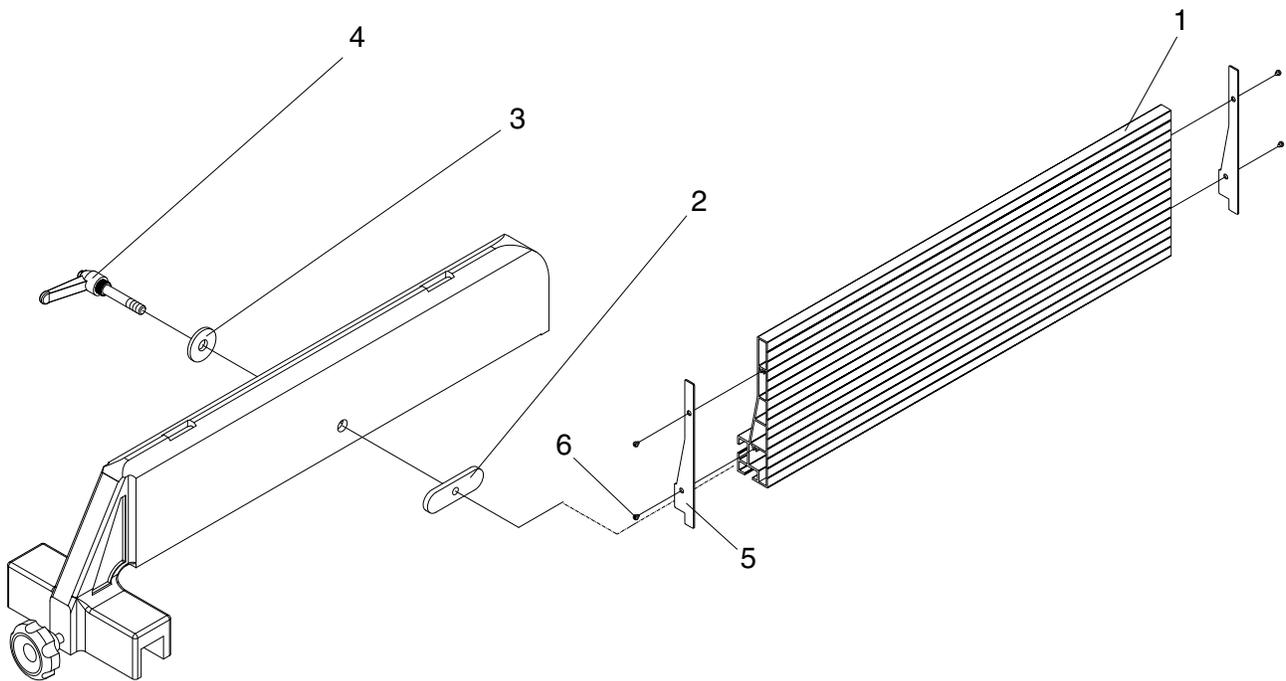3. Mount the fence assembly on the bandsaw.

Figure 1. Model H7528 inventory.

3/8" Diameter

1"

Approximate Center Line

Figure 2. Diagram for drilling the hole.

Moving Plate

Figure 3. Installing resaw fence.

H7528 Parts Breakdown and List

REF	PART #	DESCRIPTION	QTY
1	PH7528001	FENCE (AL) 505MM	1
2	PH7528002	MOVING PLATE	1
3	PW01M	FLAT WASHER 8MM	1
4	PH7528004	LOCK KNOB M8-1.25 X 44	1
5	PH7528005	END COVER 148 X 22 X 1	2
6	PHTEK3M	TAP SCREW M3.5 X 8	4

For replacement parts, call 1-800-523-4777. For help, call Technical Support at 1-570-546-9663 or email tech-support@grizzly.com.