


## Remarkably Bright, Versatile and Impressive

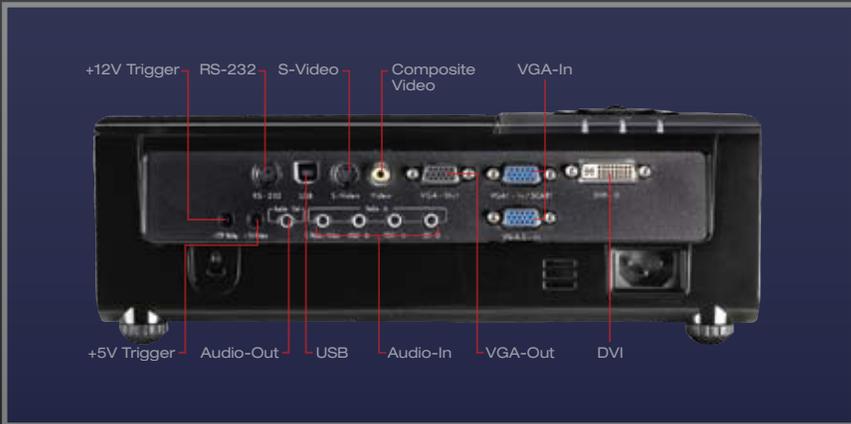

### TX761 FEATURES

- Bright at 3200 lumens with a 2200:1 contrast ratio
- Extensive connectivity options: Two VGA-in, DVI w/HDCP, composite video, s-video, RS-232, USB, VGA-out, four audio-in and one audio-out
- DLP® chipset to ensure images don't fade or degrade over time
- Latest color processing technologies for remarkable picture quality
- Weighs 6.3 pounds and features a new top-loading lamp replacement form factor
- Presentation-friendly remote control with laser pointer

Delivering amazing picture quality in a stylish, feature-rich form factor, the Optoma TX761 digital projector is just plain impressive. The TX761 offers extensive connectivity, user-friendly functionality and the latest color processing technologies for image quality that redefines extraordinary.

# TX761 | Multimedia Projector

## Projection Distance/Image Size

Projection Distance (Feet)	Maximum Diagonal (Inches)	Minimum Diagonal (Inches)
6	46.2	41.9
8	61.5	55.8
10	76.9	69.8
12	92.3	83.7
14	108.0	97.7
16	123.0	112.0
18	138.0	126.0

## Control Panel



## Optional Accessories

Lamp:	BL-FU220C
Mount:	BM-1015N
Remote:	BR-3036L
VGA Cable (1.8m):	BC-VGVGXX02
VGA to Component Cable (5m):	BC-VGCRXX05
Power Cord (1m):	BC-PUPIXY01
Power Cord (11m):	BC-PUPIXY11
S-Video Cable (5m):	BC-SVSVXX05
Composite Cable (5m):	BC-COCOXX05
VGA to Component Adaptor:	BC-VGCRXY00
DVI Cable (5m):	BC-DIDIXX05
DVI to HDMI Adapter:	BC-DIHMXY00
Carrying Case:	BK-4018

## Specifications

Display Technology:	Single 0.55" DDR DLP® Technology by Texas Instruments
Resolution:	Native XGA (1024 x 768)
Maximum Resolution:	SXGA+ (1400 x 1050)
Brightness (Typical):	3200 Lumens
Contrast Ratio:	2200:1 (Full On/Full Off)
Lamp Type:	220W
Lamp Life (Bright/STD):	Estimated at 3000/4000 Hours
Throw Ratio:	1.95-2.15:1 (Distance/Width)
Image Size (Diagonal):	34.59" to 304" (0.88 to 7.72m)
Projection Distance:	3.9' to 32.8' (1.2 to 10 m)
Noise Level (Bright/STD):	34dB/29dB
Remote Control:	Fully Featured Remote Control w/Mouse and Laser pointer
Monitor Loop Through:	D-Sub 15 VGA Output (Functional in Both Normal and Standby Modes)
Computer Compatibility:	VGA, SVGA, XGA, SXGA+ Resized, VESA, PC and Macintosh Compatible
Video Compatibility:	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i)
Aspect Ratio:	4:3 Native, 16:9 Compatible
Projection Lens:	F = 2.41 -2.55, f = 21.79 -23.99 mm, 1.10x Manual Zoom and Focus
Offset:	115%
User Controls:	Complete On Screen Menu Adjustments in 21 Languages
Audio:	One 2-Watt Speaker
Keystone Correction:	± 16° Vertical
Vertical Refresh Rate:	47 to 85 Hz
Horizontal Scan Rate:	31.5 to 100 kHz
Power Supply:	AC Input 100-240V, Auto-Switching
Power Consumption:	305 Watts (Maximum), <10 Watts (Standby)
Weight:	6.3 lbs (2.9 kg)
Dimensions (W x H x D):	11.51" x 3.73" x 8.66" (295 x 95.7 x 222 mm)
Operating Temperature:	41-95° F (5-35° C) (80% Humidity), Adjustable Fan Speed for High Altitude Application
Displayable Colors:	16.7 Million
Projection Method:	Front, Rear, Ceiling Mount, Table Top
Uniformity:	85%
Security:	One Kensington® Lock Port
I/O Connectors:	DVI-D w/HDCP, Two VGA-In, VGA-Out, S-Video, Composite Video, Four Audio-In, Audio-Out, USB, +12V Trigger, RS-232, +5V Trigger
Standard Accessories:	AC Power Cord, VGA to VGA Cable, USB Cable, Remote Control, Batteries for Remote, Carrying Case, Quick Start Guide, Warranty Card and User's Manual
Optional Accessories:	Ceiling Mount, VGA to Component Cable, S-Video Cable, Composite Video Cable, DVI to DVI Cable, DVI to HDMI Cable, Audio-Out Adapter and Panoview™ Series Screens
Warranty:	3 Years Optoma Express Replacement Service, 1 Year on Lamp
UPC:	796435 11 143 4

[www.OptomaUSA.com](http://www.OptomaUSA.com)

