

SHIBAURA


SUBCOMPACT TRACTOR

SX21
SX24

Featuring
Super Durability
& Functionality



SX21 & 24—the Right Combination of Strength, Power, Versatility, Agility, and Comfort

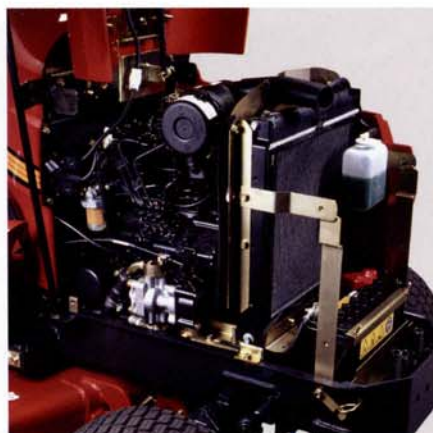

Great Accessibility for Easy Maintenance



Operator-Friendly Instrument Panel, Levers, and Pedals



Category I Three Point Hitch & Fixed Drawbar

SPECIFICATIONS (**)

TRACTOR MODEL		SX21	SX24
Drive			4WD
Transmission Type			HST
ENGINE (DIESEL)			
Model	hp(kW)	S753	S773
Engine Gross Power (*)		21(15.7)	24(17.9)
No. of Cylinders			3
Total Displacement	cc	954	1005
Rated Speed	rpm		3000
Battery	V-A		12-40
Alternator	A		40
Fuel Tank Capacity	litre		29.5
PTO - REAR : Standard, MID : Standard			
Rear PTO (at rated E. 3000rpm)			540
Mid PTO (at rated E. 3000rpm)			2185
PTO Selector Lever			3-Mode (Mid/Mid & Rear/Rear)
HYDRAULIC			
Position Control			Standard
Max. Lifting Capacity (@24 behind LP) (*)	kg		318
Draft Control			N/A
3-Point Hitch — Category-1 & Fixed Drawbar			Standard
TRAVELING SYSTEM			
Steering			Power Steering
Brake			Wet Disk
STANDARD TIRE SIZE			
Bar Type		(F)18×8.50-8 (R)26×12.00-12	
Turf Type (Option)		(F)18×8.5-8 (R)26×12.00-12	
Agricultural Type (Option)		(F)4.00-9 (R)7-14	
TRAVELING SPEED			
Forward (*)	km/h	8.1-16.6	
Reverse (*)	km/h	5.4-11.1	
DIMENSIONS			
Overall Length (W/3P)	mm	2493	
Overall Width (Bar tires)	mm	1175	
Overall Height (W/ROPS) (Bar tires)	mm	2288	
Wheelbase (Bar tires)	mm	1400	
Min. ground clearance (Bar tires)	mm	230	
Tread Setting — Front/Rear (Bar tires)	mm	940/870	
Weight (W/ROPS) (Bar tires)	kg	694	696

(*) Manufacturer's estimation

(**) The specifications are subject to change without notice

 **SHIBAURA**

Ishikawajima-Shibaura Machinery Co.,Ltd.

Head Office : Harmony -Tower 11F