



OWNER'S MANUAL

Model: 7960DTL

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference; and
- (2) This device must accept any interference received, including interference that may cause undesired operation.


Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

Introduction

Congratulations on your purchase of the Silencer 7960DTL Digital Tap Entry System.

The primary function of this system is to provide emergency entry into your vehicle if you accidentally lock the keys inside. This system will also provide a means to enter your vehicle without the use of keys. You then can purposely lock your keys inside the vehicle and they will be secure. Read and follow the enclosed operation procedures to operate and program your Digital Tap Entry System.

Tap- Sensor Controls

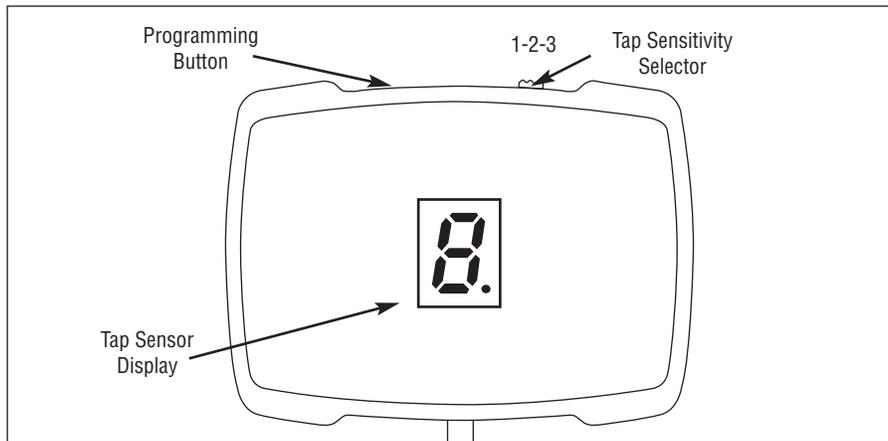

Sensitivity Selector

The sensitivity selector will adjust the tap force required to wake up and operate the tap sensor. Persons with bigger fingers may require less sensitivity while persons with smaller fingers or long fingernails may require more sensitivity. This is a user adjustable switch with (3) positions.

Position 1 = Low Sensitivity setting

Position 2 = Medium Sensitivity Setting
(Default Factory Setting)

Position 3 = High Sensitivity Setting

Tap-Sensor Display

Once you wake up the tap sensor, this is the area that will display the digits required to "tap-select" the code.

Programming Button

The programming button is used for programming the user code and to recall the user code.

Additional Information

- The 7960DTL is functional when the ignition key is on or off. If you accidentally lock the keys in your vehicle while it is running, you can still use the Digital Tap Entry System to unlock your doors and re-gain entry into your vehicle.

- The following unsuccessful code entry attempts will lock the tap sensor out for 1 minute:

If your code is 3 digits, 3 unsuccessful attempts,

If your code is 4 digits, 4 unsuccessful attempts,

If your code is 5 digits, 5 unsuccessful attempts.

Note: Cycling the ignition key on-off will reduce this time.

- The tap code must be a minimum of 3 digits or a maximum of 5 digits.

- The Digital Tap Entry System will only retain (1) user code.

Program a User Code

To Program the User Code, Repeat the Following Steps:

1. All vehicle security systems must be in disarmed mode prior to tap-code programming.
2. Decide what your new user code will be before starting the programming sequence. The user code must be a minimum of (3) digits and a maximum of (5) digits.
Note: Default user code is 11111.
3. Set the ignition key from the "Off" position to On - Off - On (Ignition is on).
4. Press and release the black rubber button on the tap sensor (3) times.
5. In an area close to the tap sensor, tap the vehicle glass (2) times. The tap sensor will flash "0" - "0" and then start to display digits from 1-5.
6. Tap on the glass (1) time when the first digit of your unlock code is shown. The digit will flash twice to confirm that it has been selected. The tap sensor will start to display numbers from 1 to 5 again. Tap on the glass (1) time for each remaining digit of your user code.
7. When you are done "tap-selecting" your user code, set the ignition key to the Off position. The tap sensor will flash "0" - "0" and then display the new code you have entered. The tap sensor will repeat the "0" - "0" flash and display the new code a second time.

To Unlock Your Vehicle

1. Tap on the vehicles windshield near the location of the tap sensor 2 times. The tap sensor will display "0" - "0" and then will start to display numbers from 1 to 5, pausing for 1 second between each number.
2. Tap on the glass 1-time when the first digit of your unlock code is shown. The digit will flash twice to confirm that it has been selected.
3. The tap sensor will start to display numbers from 1 to 5 again. Tap on the glass 1- time for each remaining digit of your user code.
4. When the correct code has been "tap-selected", the display will show "C" and the doors will unlock.
5. If a mistake was made in the digit selection process, the display will show "E" and start displaying numbers from 1 to 5 again. Repeat steps 2-3.
6. The following unsuccessful code entry attempts will lock the tap sensor out for 1 minute:
If your code is 3 digits, 3 unsuccessful attempts,
If your code is 4 digits, 4 unsuccessful attempts,
If your code is 5 digits, 5 unsuccessful attempts.
Note: Cycling the ignition key on-off will reduce this time.

Recalling the Programmed Tap Code

- In the event you forgot your tap code, repeat the following procedure to recall the programmed tap-code:
1. Set the ignition key from the "Off" position to On - Off - On (Ignition is on).
 2. Press and release the black rubber button on the tap sensor (6) times.
 3. The tap sensor will display the current tap-code starting with "0" - "0". The code will be displayed twice.

Warranty



3 Year Warranty

Your new **Silencer® Security Systems** is warranted to be free of defects for 3 years. **Silencer®** or its authorized agents will within 3 years from the date of sale to you, repair or replace said product or any part thereof, at the option of the **Silencer®** or its authorized agents, if said product or part is found defective in materials or workmanship, when properly connected and operating on the correct power requirements designated for the specific product. This warranty and **Silencer®** or its authorized agents obligations hereunder do not apply where the product was; damaged while in the possession of the consumer, subjected to unreasonable or unintended use, not reasonably maintained, or serviced by anyone other than **Silencer®** or its authorized agents, or where the warning seal on the product is broken or the power and/or plugs are detached from the unit. This warranty does not cover the cabinet appearance items or accessories used in connection with this product, or any damage to the products resulting from improper installation, alteration, accident, misuse, abuse or acts of nature. **Silencer® OR ITS AUTHORIZED AGENTS SHALL NOT BE LIABLE TO ANYONE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES OR CLAIMS EXCEPT THOSE ACCORDED BY LAW. NO EXPRESSED WARRANTY OR IMPLIED WARRANTY IS GIVEN EXCEPT THOSE SET FORTH HEREIN. NO IMPLIED WARRANTY SHALL EXTEND BEYOND 3 YEARS FROM THE DATE OF SALE.** Some states do not allow limitations on how long an implied warranty lasts, and some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusion may not apply to you. This warranty gives you specific legal rights, and you may have other rights that vary from state to state. Defective merchandise should be returned to the original point of purchase or secondly, to 1111 W. Victoria Street, Compton CA 90220. Return Authorization must be obtained before sending, or merchandise may be refused. All claims concerning your **Silencer® Security System** should be referred to your selling dealer. If you are away from the vicinity of the selling dealer please call (800) 340-3200.