

# Makita®

# 6-1/2" PLUNGE CIRCULAR SAW

**PRECISION ACCURATE CUTTING DELIVERS A SPLINTER-FREE MIRROR FINISH**

Electronic Speed Control Maintains Constant Speed Under Load for Smooth Cutting

Variable Speed Dial Control (2,000 - 5,200 RPM) for Optimum Performance in a Variety of Materials

Built-in Current Limiter Helps Prevent Motor Burnout

Powerful 12 AMP Motor for Continuous Operation

Electronic Soft Start Feature for Smooth Start-Ups

Large Cutting Capacity (2-3/16" at 90° and 1-9/16" at 45°)



**Model  
SP6000K**

## CONVENIENCE




Close-to-wall cutting;  
only 11/16" away from wall

## PRECISION



Depth stopper for splinter-free cutting  
enables to easily cut a preliminary  
groove at a depth of 1/16"

## ACCURACY

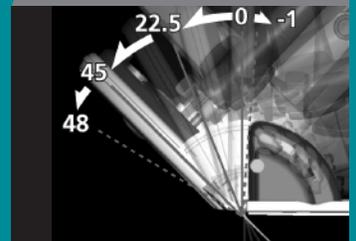

Positive Stopper  
22.5°



Lever for fine adjustment  
between 45° - 48°

Release lever for bevel angle (-1°)

Straight or bevel cutting; blade enters  
material on the same cutting line

# PERFECT CUTTING

# 6-1/2" PLUNGE CIRCULAR SAW

## Model SP6000K

### ADDITIONAL FEATURES & BENEFITS

- Easy to set depth adjustment with large scale
  - Smooth and convenient plunge release lever for operator comfort
  - Bevel capability (-1° to 48°) with positive stops at 22.5° and 45°
  - Magnesium components deliver a well balanced and lightweight saw at only 9.1 lbs.
  - Dual front and rear bevel supports provide additional rigidity for precise and accurate bevel cuts
  - Precise bevel cutting as the position of the blade enters the material on the same cutting line whether cutting straight or bevel
  - Close to the wall cutting (11/16") for expanded cutting applications
  - Locking lever holds the blade in position so that the wrench can be inserted through the hole in the blade case for easier blade installation
  - Blade wrench attaches to the saw for fast and convenient blade changes
  - Electric brake for improved productivity
  - Built-in depth stop allows a preliminary cut of 1/16" to be performed before the entire material is cut through for clean and splinter-free cutting
  - Rubberized handles for added comfort
  - Large 1-7/16" rear dust port directs material away from the operator and easily connects to a vacuum system
  - Includes a premium 48 tooth carbide-tipped blade
- ### FEATURES WITH OPTIONAL GUIDE RAIL
- Optional guide rail system interacts with the saw base to provide smooth perfect dead-on straight or bevel cutting
  - Tool-less cam adjustments on the saw base enable fine tuning to the guide rail minimizing play for more precise cutting
  - Slide lever built into the saw base locks the saw to the guide rail to help support the saw while making bevel cuts
  - Saw base is attachable to other guide rail systems in the market

### STANDARD EQUIPMENT

- Carbide-Tipped Blade - 48T (B-07353)
- Hex Blade Wrench (783203-8)
- Plastic Tool Case

### SPECIFICATIONS

Blade diameter	6-1/2"
Arbor	13/16"
Max cutting capacities:	90° 2-3/16" 45° 1-9/16"
No load speed	2,000 - 5,200 RPM
Watts out	1,300
AMPS (120V)	12
Overall length	13-3/8"
Net weight	9.1 lbs.
Shipping weight	16.2 lbs.
UPC	088381-078443

Makita offers a wide variety of CIRCULAR SAW accessories. For a complete listing, please refer to the Makita General Catalog, or visit our website at [makitatools.com](http://makitatools.com), or call 1-800-4MAKITA.

All specifications subject to change without prior notice. All models and accessories subject to stock on hand.  
NTF-0808-400 MA-0803-08 For more information, call 1-800-4MAKITA or visit [makitatools.com](http://makitatools.com)



### EASY BLADE CHANGES




Locking lever holds the blade in position to be replaced



Wrench is inserted through a hole in the blade case



Blade wrench attaches to the saw for convenience

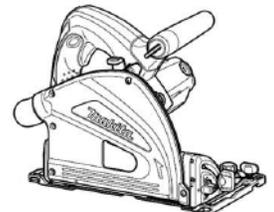

Model SP6000K



### OPTIONAL ACCESSORIES


- Guide Rail: (117") (194367-7)  
(54") (194368-5)



- Clamp Set (194385-5)



- Guide Rule (165447-6)

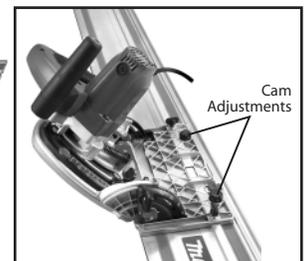

Cam adjustments minimize play for precise cutting



Makita U.S.A., 14930 Northam St., La Mirada, CA 90638