


HCFC-Free Ultra-Low Temperature Freezer

MDF-U4186S

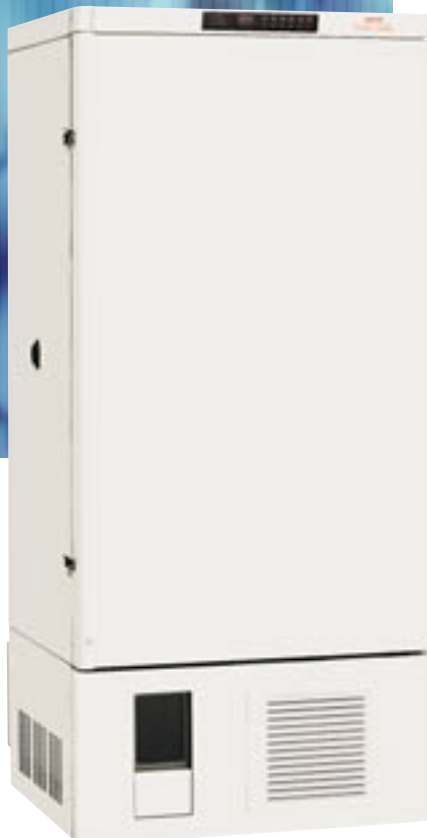

MDF-U4186S

Temperature
(Ambient temp. 30°C)

-86°C

Effective capacity

382 Liter / 13.5 cu.ft.

192 pcs.

2" inventory boxes

Medium capacity Ultra-Low Freezer with robust cooling performance


- Safe operation with advanced refrigeration system
- Improved accessibility
- Quiet operation
- Enhanced security
- The inner doors are removable for cleaning and defrosting
- Can hold up to 192 pcs. of 2-inch boxes or 144 pcs. of 3-inch boxes

MDF-U4186S

Features

EVOLUTIONARY DESIGN

- The newly developed refrigeration system and the freezer structure offer a quiet experimental environment.
- The newly developed back cover combined with new aerodynamically designed and placed components in the refrigeration compartment provide superior air flow, making it possible to drastically reduce the stress to the freezer and contributing to excellent durability.

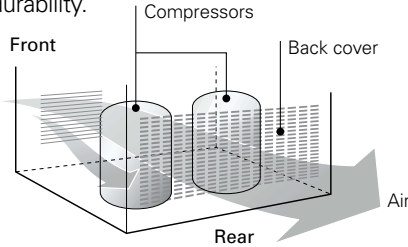

- Two independent and insulated inner doors prevent cold air leakage.

ACCESSIBILITY

- The condenser filter is situated at the bottom right side of the front panel to make filter removal and cleaning easier.




SAFETY

- The backup battery sounds an alarm in the event of power failure or AC interruption or abnormality.
- Provides both an audible and visual temperature alarm when the temperature goes up more than +10°C/+15°C from the set point.
- Alarm ring back function ensures that buzzer will resume operation, should alarm conditions continue after it is silenced.
- Microprocessor-controlled filter-clog check function protects the refrigeration circuit.
- Control panel with digital display for easy operation.




Control panel

Performance Data

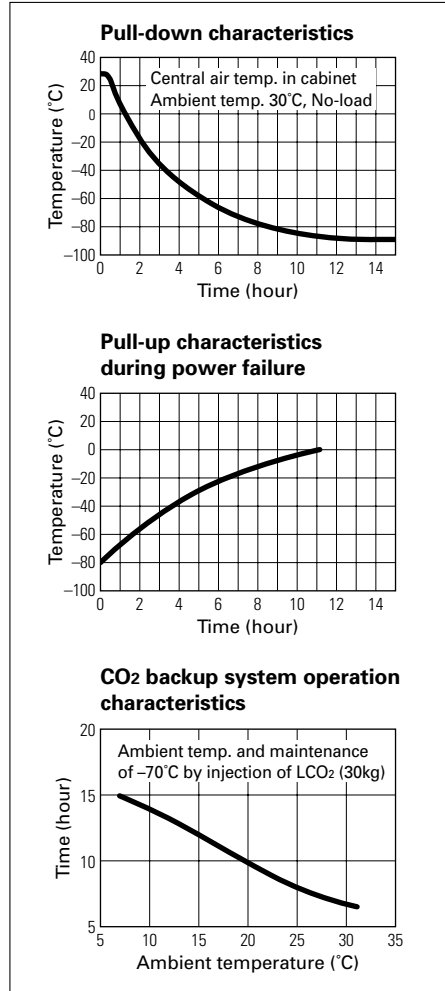

Dimensions

[Unit: mm (inch)]

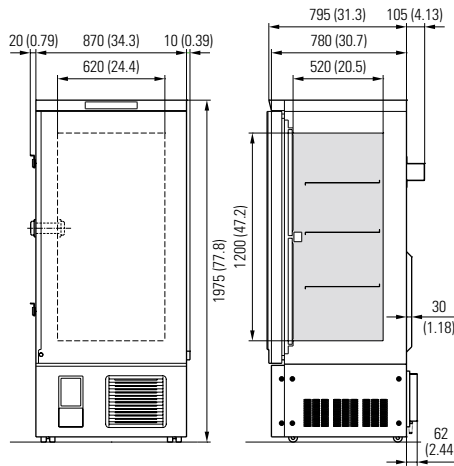

Specifications

Model	MDF-U4186S
Temperature range	-20°C to -86°C (1°C increment)
Maximum cooling performance	-86°C (Ambient temperature 30°C)
Exterior dimensions (W x D x H)	870 x 780 x 1975 mm (34.2" x 30.7" x 77.8")
Interior dimensions (W x D x H)	620 x 515 x 1200 mm (24.4" x 20.3" x 47.2")
Net weight	Approx. 281 kg (619 lbs.)
Effective capacity	382 L (13.5 cu.ft.)
Shelf	Stainless steel, Adjustable, 3 shelves
Access port	40 mm diameter, 1 location (left side)
Compressor	Hermetic type, Output: 1100 W (high stage side), 1100 W (low stage side)
Refrigerant	HFC refrigerant
Alarm	High temperature, Power failure, Filter check, Part replacement notification
Remote alarm contact	Allowable contact capacity: DC 30V, 2A
Accessories	1 set of keys, 1 scraper

*Cooling performance is indicated by the temperature reached at the center of the freezer (at ambient temperature of 30°C with no load).




In order to use the freezer at a stable temperature for a long time, it is recommended that the temperature be set to at least 5°C higher than the indicated lowest temperature. In addition, depending on the usage conditions, it may not be possible to reach the indicated lowest temperature.

Caution:

SANYO guarantees the product under certain warranty conditions. SANYO in no way shall be responsible for any loss of content or damage to content.

- Appearance and specifications are subject to change without notice.

Options

		
IR-212U	MDF-48SC	LCO ₂ backup system CVK-UB2
Inventory rack: IR-212U (for 2-inch box)	Storage rack: MDF-48SC (3 drawers)	LN ₂ backup system CVK-UBN2
IR-309U (for 3-inch box)		
Rack Capacity		
IR-212U	16	
IR-309U	16	
MDF-48SC	8	
		Strip chart recorder MTR-85H

SANYO DAQ (Data Acquisition) system

MTR-480
MTR-2000

SANYO Electric Co., Ltd., Biomedical Division, Gunma is certified for:

Quality management system: ISO9001 / Medical devices quality management system: ISO13485 / Environmental management system: ISO14001

RoHS (European Restriction of Hazardous Substances directives) compliant

Distributed by:

SANYO

SANYO Electric Co., Ltd.
Biomedical Division
<http://www.sanyo.co.jp/cm/g/biomedical>

©2008 SANYO Printed in Japan 2008.12 MA
SHR143