




# OHP-3000M

## Overhead Projector

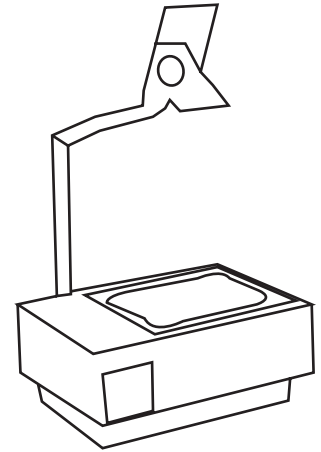

**OHP-3000M**

### KEY FEATURES: Model OHP-3000M

- Safety Interlock: Internal switches cut power when lamp house cover is removed or when unit is folded down.
- Fuse: 10A for 110 - 120V, 5A for 220 - 240V.
- Magnification: 2.8X to 10X.

### SPECIFICATIONS: Model OHP-3000M

Type	Transmissive console projector	Mirror	Dichroic surface high reflection type
ANSI Lumens	5000	Stage Aperture	285 mm x 285 mm
Projection Lamp	575 W Metal Halide	Power Switch	On/Off rocker type
Estimated Lamp Life	800 hrs.	Cooling System	Fan cooled
Lens Type	275 ~ 320 mm 3 element	Weight	7.9 kg.
Condenser System	Glare-free Acrylic fresnel	Power Requirements	110-240V, 50/60 Hz, 550VA
Projection Heads	Folding	Power Consumption	480 W Approx.
Construction	Stamped	Power Cord	3 m, 3-prong (grounded) attached
Dimensions (HxWxD)	718 mm x 360 mm x 450 mm	Safety Compliance	cUL Listed
		Warranty - Unit	3 Years (Parts & Labor to Correct Defects)

**Prices and Specifications subject to change without notice. ©2001 Eiki International, Inc. 2/13/2003**

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com  
 In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: canada@eiki.com  
 Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: <http://www.eiki.com>