


Through Hole Power Inductors


THXR1290 Type

Features


- RoHS compliant.
- High current through hole type.
- Magnetically shielded, suitable for high density mounting.
- High energy storage and low DCR.
- Ideal for power source circuits, DC-DC converter, DC-AC inverters inductor application.
- In addition to the standard versions shown here, customized inductors are available to meet your exact requirements.

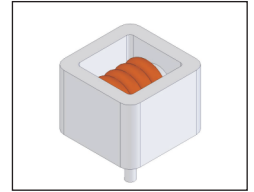

Mechanical Dimension:

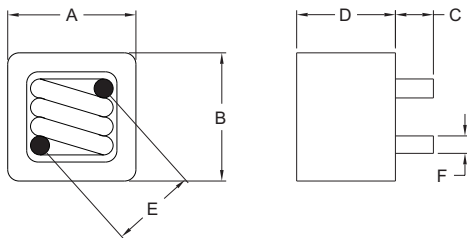


RECOMMENDED PAD PATTERNS



UNIT : mm/inch
 A = 11.90 / 0.469 Max.
 B = 11.90 / 0.469 Max.
 C = 3.50 ± 0.5 / 0.138 ± 0.020
 D = 9.00 / 0.354 Max.
 E = 9.48 ± 0.5 / 0.373 ± 0.020

Electrical Characteristics : At 25°C: 100KHz, 1V

PART NO.	L^1 (μ H)	I_{sat}^2 (A \sqrt{dc})	I_{rms}^3 (A \sqrt{dc})	DCR ($m\Omega$) $\pm 8\%$	F ± 0.1 (mm/inch)	F ± 0.1 (mm/inch)
THXR1290-R47	0.47	45.00	24.00	0.76	1.5 / 0.059	1.8 / 0.071
THXR1290-0R6	0.60	26.00	20.00	0.76	1.5 / 0.059	1.8 / 0.071
THXR1290-0R8	0.80	24.00	12.00	1.20	1.3 / 0.051	1.6 / 0.063
THXR1290-1R0	1.00	18.00	11.00	1.20	1.3 / 0.051	1.6 / 0.063
THXR1290-1R5	1.50	13.00	11.00	1.70	1.2 / 0.047	1.5 / 0.059
THXR1290-2R0	2.00	10.00	9.00	2.70	1.00 / 0.039	1.30 / 0.051
THXR1290-3R3	3.30	8.00	8.00	5.30	0.80 / 0.032	1.10 / 0.043

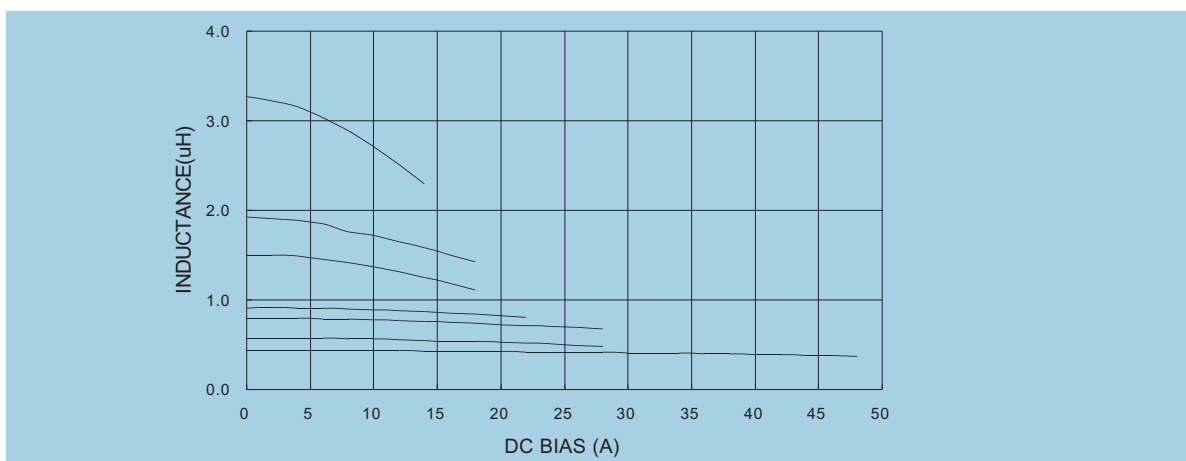

1. L_0 is the initial inductance and the tolerance is $\pm 20\%$.
2. I_{sat} is the DC current which cause the inductance drop approximately 20% of its nominal inductance without current.
3. I_{rms} is the DC current which cause the surface temperature of the part increase approximately 45°C.
4. Operating temperature : -20°C to 105°C (including self-temperature rise).



DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEISAN INDUSTRIAL ZONE, TAOYUAN SHIEN, 333, TAIWAN, R.O.C.

TEL: 886-3-3591968; FAX: 886-3-3591991

<http://www.deltawww.com>