

TX775

# The Sleek & Complete Solution



## Robust, Bright and Designed for Performance


With 3500 lumens, a 2300:1 contrast ratio and sleek new design, the Optoma TX775 offers the ultimate solution for presentations. The TX775 features a new form factor that can integrate easily into installations or conference room settings. Its built-in audio means the Optoma TX775 provides a complete multimedia experience for demanding video applications.

- Bright **3500 ANSI lumens** with a **2300:1 contrast ratio**
- New form factor allows for easy replacement of lamp
- Native **XGA (1024 x 768)** with support up to **SXGA+ (1400 x 1050)**
- Designed to integrate cleanly into installations or conference room settings
- **Fully featured remote control** with laser and mouse controls
- **Recessed focus and zoom** controls prevent accidental adjustments


Optoma

[www.OptomaUSA.com](http://www.OptomaUSA.com)


### Advanced DLP® Technology

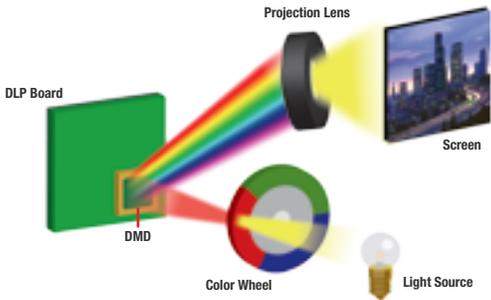

### Remote Control

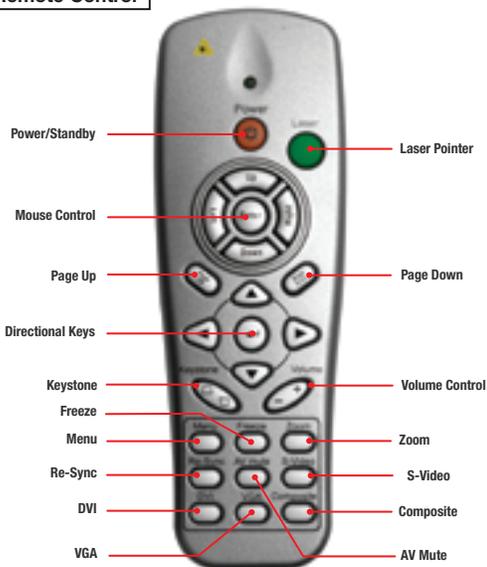

### I/O Ports

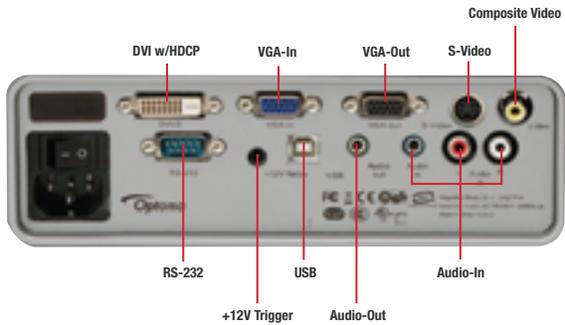

## Specifications

<b>Display Technology:</b>	Single 0.7" DDR DLP® Technology by Texas Instruments
<b>Resolution:</b>	XGA (1024 x 768)
<b>Maximum Resolution:</b>	SXGA+ (1400 x 1050)
<b>Brightness (Typical):</b>	3500 Lumens
<b>Contrast Ratio:</b>	2300:1 (Full On/Full Off)
<b>Lamp Life (STD/ECO):</b>	2000/3000 Hours
<b>Lamp Type:</b>	230W SHP
<b>Throw Ratio:</b>	1.8-2.1:1 (Distance/Width)
<b>Image Size (Diagonal):</b>	27.5" to 306" (0.7 to 7.8 m)
<b>Noise Level (STD/ECO):</b>	33dB/31dB
<b>Remote Control:</b>	Fully Featured IR Remote w/ Laser Pointer and Mouse
<b>Monitor Loop Through:</b>	D-Sub 15 VGA Output (Functional in Both Normal and Standby Modes)
<b>Projection Distance:</b>	3.2' to 32.8' (.08 to .83m)
<b>Computer Compatibility:</b>	XGA, SVGA, VGA, SXGA+ Resized, VESA, PC and Macintosh Compatible
<b>Video Compatibility:</b>	NTSC, PAL, SECAM, EDTV (480p), HDTV (576i/p, 720p, 1080i)
<b>Aspect Ratio:</b>	4:3 Native, 5:4 & 16:9 Compatible
<b>Projection Lens:</b>	F=2.6~2.81, f=26.01~29.84mm, 1.15:1 Manual Zoom and Focus
<b>Audio:</b>	One Internal 2-Watt Speaker
<b>Weight:</b>	7.3 lbs (3.3 kg)
<b>Dimensions (W x H x D):</b>	11.81" x 3.46" x 9.61" (300 x 100.5 x 244 mm)
<b>Keystone Correction:</b>	± 15° Vertical
<b>Horizontal Scan Rate:</b>	31 to 90 kHz
<b>Vertical Refresh Rate:</b>	50 to 85 Hz
<b>Power Supply:</b>	AC Input 100 - 240V, 50-60Hz
<b>Power Consumption:</b>	295 Watts, <5W Standby Power
<b>Operating Temperature:</b>	Operating: 5 to 35°C, 80% Humidity (Max) Storage: -20 to 60°C, 80% Humidity (Max)
<b>Displayable Colors:</b>	16.7 Million, 256 Shades of Gray
<b>Projection Method:</b>	Front, Rear, Ceiling Mount, Table Top
<b>Uniformity:</b>	85%
<b>Security:</b>	One Kensington® Lock Port
<b>User Controls:</b>	Advanced Adjustability Options through the On-Screen Display
<b>I/O Connectors:</b>	VGA-In, DVI w/HDCP, Composite Video, S-Video, Two Audio-In (RCA & Mini-Din), USB, RS-232, VGA-Out, Audio-Out, +12V Trigger
<b>Standard Accessories:</b>	AC Power Cord, VGA to VGA Cable, RS-232 Cable, Composite Video Cable, Remote Control, Batteries for Remote, CD-ROM User's Manual, Quick Start Guide, Warranty Card, Lens Cap and Carrying Case
<b>Optional Accessories:</b>	Bering Ceiling Mount, DVI to HDMI Adapter, DVI to HDMI Cable, DVI Cable and GrayWolfII™ Series Screens
<b>Warranty:</b>	3 Years Optoma Express Replacement Service, 1 Year on Lamp
<b>UPC:</b>	796435 11 126 7

Available from:

