

- U.S. DOE Compliant for Water and Energy Standards
- ADA Compliant
- Ultra High Efficient With High Speed Extract and Low Water Consumption

## MULTI-HOUSING Manual Control


Commercial  
Front Load Washer

Rear Control


**Speed Queen®**



ENERGY STAR® Qualified

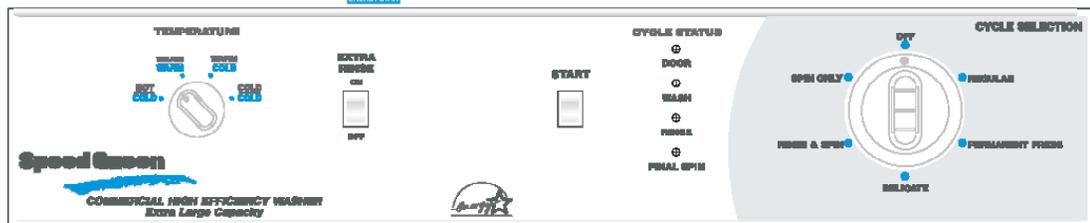

LTSAOAWN

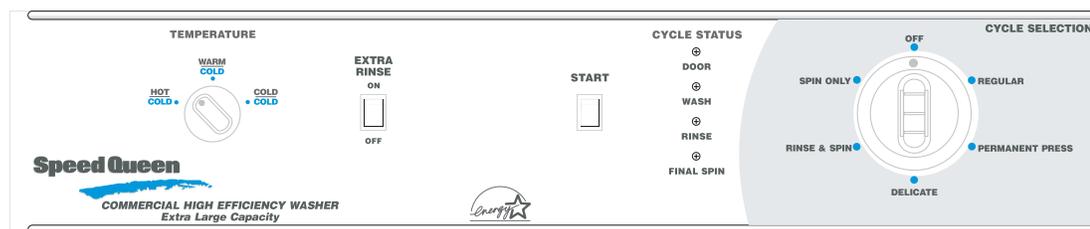

LFNAORSP11TW01

## RELIABLE COMMERCIAL PRODUCTS

Large Door Opening  
With Stainless Steel Hinge



Multi-Compartment  
Supply Dispenser



- Durable Stainless Steel Washtub
- High Speed Extract of 1000 RPM Spins Clothes Out Drier
- Energy Efficient Wash Cycles
- Door Swing 180°

# MANUAL FRONT LOAD WASHER SPECIFICATIONS

| REAR CONTROL  | L TSAOAWN       | LFNAORSP111TW01 |
|---|-----------------|-----------------|
| Activation  | Manual          | Manual          |
| <b>Appearance</b>   |                 |                 |
| Color   | White           | White           |
| Control Panel Selection   | Rear            | Rear            |
| <b>Water and Energy Info</b>  |                 |                 |
| Modified Energy Factor "MEF"<br>ft <sup>3</sup> /kWh/cycle (Liters/kWh/cycle) | 2.04 (57.77)    | 2.24 (63.44)    |
| Water Factor "WF" - gal/ft <sup>3</sup> (Liters/Liter/cycle)                  | 4.9 (0.65)      | 4.5 (0.6)       |
| Water Consumption - gal (Liter)   | 13.9 (52.6)     | 12.8 (48.4)     |
| Average Hot Water - gal (Liter)   | 1.74 (6.6)      | 1.59 (6.0)      |
| <b>Technical Info</b>   |                 |                 |
| Weight - lb (kg)  | 230 (105)       | 230 (105)       |
| Shipping Weight - lb (kg)   | 250 (113)       | 250 (113)       |
| Electrical Requirements   | 120/60/1 15 amp | 120/60/1 15 amp |
| Overall Dimensions - WxDxH in (mm): 26 7/8" (683) x 28" (711) x 43" (1092)    |                 |                 |
| Stainless Steel Basket Volume - cu. ft. (liters)                              | 2.84 (80)       | 2.84 (80)       |
| Wash Temp - Hot/Cold, Warm/Cold, Cold/Cold                                    |                 |                 |
| Motor   | 1 HP 750 W      | 1 HP 750 W      |
| Water Pressure psi (Bar) Pressure Fill 20 to 120 psi                          | 1.4/8.3         | 1.4/8.3         |
| Spin Speeds - RPM   | 500, 650, 1000  | 500, 650, 1000  |
| Drain   | Pump            | Pump            |
| <b>Performance/Features</b>   |                 |                 |
| Extra-Large Capacity  |                 |                 |
| Freestanding Front Load Washer  |                 |                 |
| Agency Approval   | cULus           | cULus           |

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO9001:2008.

