

NEW

ELMO

EV-4450AF

VISUAL PRESENTER



The Visual Presenter incorporates the latest in high technology & user friendly control level and the most convenient way of use.

- 18x optical powered zoom with Auto focus/iris
- Digital image magnification and scrolling
- Max. 420x310mm (16.5x12.2") wide shooting area
- More than 470 TV lines high resolution & better than 48dB S/N
- Built-in baselight for transparency/slide film viewing
- Twin upper lighting unit for even and bright illumination
- Operation via front panel, wireless remote control (supplied), mouse (supplied) or RS-232C terminal
- Audio input/output and microphone input
- Auto/push-set white balance control
- Nega/posi, color/B&W conversion
- Internal/external sync
- OSD (on screen display) control
- Flat stage body with foldable camera arm and carrying handle

All these in one model - ELMO EV-4450AF

ELMO


Visualizing technology since 1921

VISUAL PRESENTER EV-4450AF

SPECIFICATIONS

Image pick-up device	1/3" IT CCD 480,000 pixels
Resolution (Horizontal)	More than 470TV lines
S/N ratio	More than 48dB
Lens : Zooming	18x zoom
: F No	2.1-2.4
: f (mm)	4.7-84.6
Close-up lens	Built-in (one-touch flip on-off)
Shooting area (VxH)	420x310mm - 26x20mm (16.5"x12.2"-1.0"x0.8")
Head rotation (front-rear)	Built-in (245°)
Iris	Auto (with level adjustment)
Zooming	Powered
Electronic zooming	Provided
Focusing	Auto focus/Powered focus
White balance	Auto/Push-set
Nega./Posi. conversion	Provided
Color/B&W selection	Provided
Edge enhancement	Provided
Enlargement of the image	Yes (Image from internal camera only)
Scroll	Yes (Image from internal camera only)
On screen display	Provided
Sync. system	Internal/External (Horizontal & Vertical)
Input selection	Internal/AV1/AV2
Composite video output	2 (One each of BNC & RCA connectors)
S-Video output	1 (Mini DIN 4 pin connector)
Audio output	Stereo (RCA connectors)
Microphone input	Provided
Composite video input	x2
S-Video input	x2
Audio input	x2 (stereo)
Upper lighting unit	Built-in (6W x2)
Baselight	Built-in
Wireless (IR) remote control	Supplied
Mouse control	Supplied
Communication	RS-232C
Flat stage	Provided
Carrying handle	Built-in
Weight	10 kgs (22.1lbs)
Power source	AC100-240V 50Hz
Power consumption	0.4A-0.3A

PROFILE

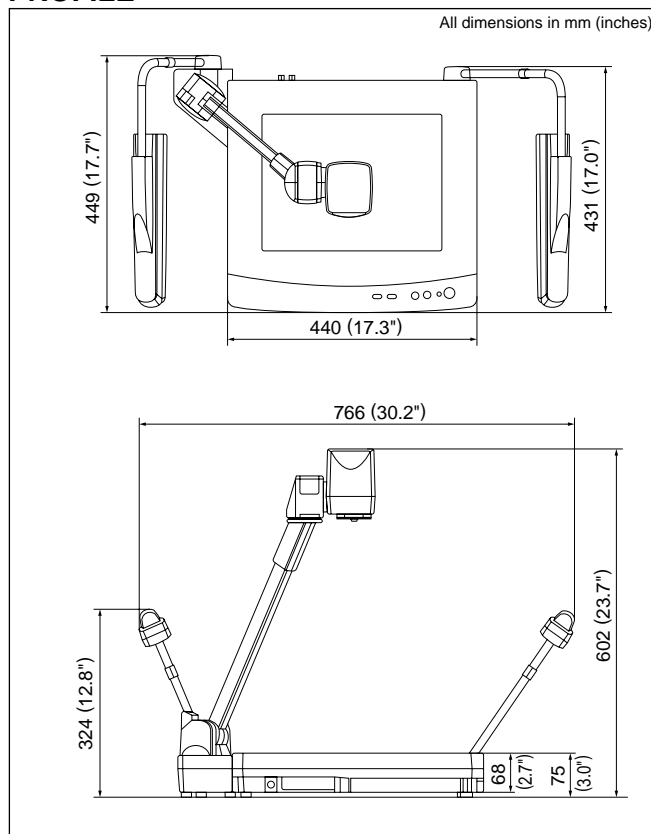

Note : Dimensions and weight are approximate.
Design and specifications are subject to change without prior notice.

ELMO ELMO CO., LTD.

Additional technical information is available from any of the following subsidiary companies;

ELMO (Europe) G.m.b.H.
Neanderstr 18,
40233 Düsseldorf, Germany
Tel. 0211-376051-53 Fax. 0211-376630
E-mail:elmo@elmo.co.jp
Web:http://www.elmo.de

ELMO Mfg. Corp.
1478 Old Country Road,
Plainview, NY 11803-5034, U.S.A.
Tel. 516-501-1400 Fax. 516-501-0429
E-mail:elmo@elmousa.com
Web:http://www.elmousa.com

ELMO Canada Mfg. Corp.
44 West Drive, Brampton,
Ontario, L6T 3T6, Canada
Tel. 905-453-7880 Fax. 905-453-2391
E-mail:info@elmocanada.com
Web:http://www.elmocanada.com

6-14, Meizen-cho, Mizuho-ku,
Nagoya, 467-8567, Japan
E-Mail:foreign-div@elmo.co.jp