


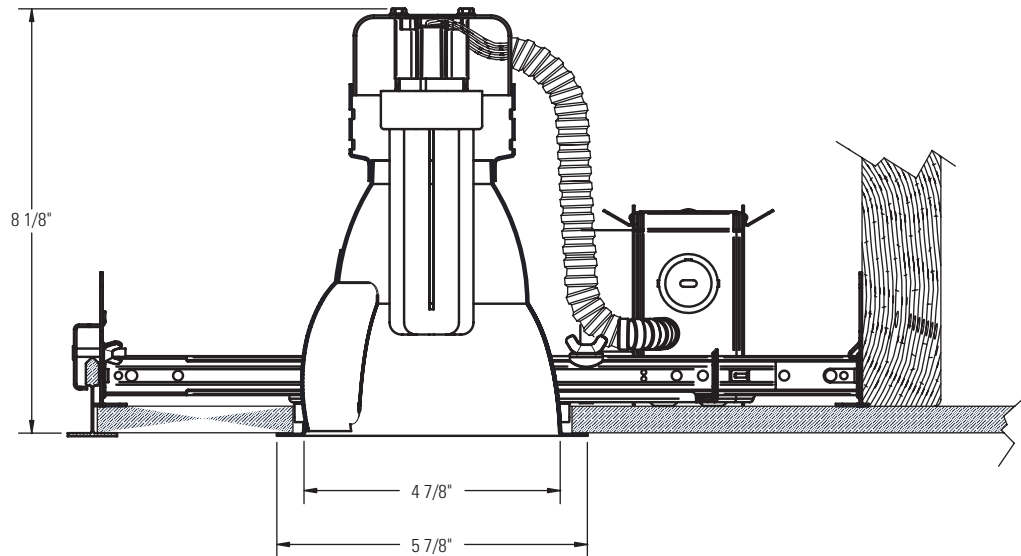

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe™ Compact Fluorescent Performance Series Reflector Trims		Compatible Uniframe™ Frame-In Kits (See Individual Frame-In Kit Specification Sheets)		
Catalog No.	Description	Catalog No.	Installation Type	Lamping
1001CLSW 1001CDSW 1001WHSW	5" Vertical Single Wall Wash – Specular Clear 5" Vertical Single Wall Wash – Clear Diffuse 5" Vertical Single Wall Wash – Matte White	1001F13U	Uniframe™ Non-IC 120/277v	13w Quad/Triple
		1001F18U	Uniframe™ Non-IC 120/277v	18w Triple
		1001FR18U	Uniframe™ Non-IC Remodeler 120/277v	
		1001F18UEM	Uniframe™ Non-IC Emergency 120/277v	
		1001F26U	Uniframe™ Non-IC 120/277v	26w Triple
		1001FR26U	Uniframe™ Non-IC Remodeler 120/277v	
		1001F26UEM	Uniframe™ Non-IC Emergency 120/277v	
		1001FD26L1	Uniframe™ Non-IC Lutron Dimming 120v	26w Triple
		1001FD26L2	Uniframe™ Non-IC Lutron Dimming 277v	
		1001FD26MX1	Uniframe™ Non-IC Advance Mark10 Dimming 120v	26w Triple
		1001FD26MX2	Uniframe™ Non-IC Advance Mark10 Dimming 277v	
		1001FD13M7U	Uniframe™ Non-IC Advance Mark7 Dimming 120/277v	13w Triple
		1001FD18M7U	Uniframe™ Non-IC Advance Mark7 Dimming 120/277v	18w Triple
		1001FD26M7U	Uniframe™ Non-IC Advance Mark7 Dimming 120/277v	26w Triple

Features

- Reflector:** Formed aluminum. Matte White flange.
- Finishes:** CL = Specular Clear (Iridescent Free coating)
CD = Clear Diffuse
WH = Matte White Paint
- Wall Wash Kick Reflector:** Formed aluminum. Clear finish.
- Performance Data:** 60° Cutoff angle.
See attached photometric reports for distribution and efficiency data.
Go to www.lighttolier.com for .IES files.

Labels

cULus Listed. Suitable for Damp Locations. I.B.E.W.

Job Information

Type:

Job Name:

Cat. No.:


Lamp(s):

Notes:



Lighting Data

Footcandles On Wall: Multiple Units

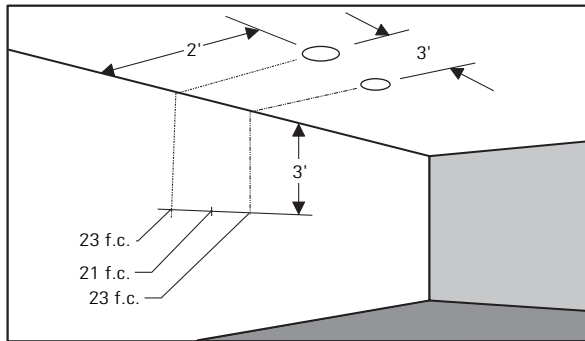

EXAMPLE: 26w with multiple clear reflector units located 2' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 23 f.c. beneath units and 21 f.c. between units.

26w Triple Tube Lamp

2' From Wall-2' On Center

Distance From Ceiling in Feet	1'	2'	3'	4'	5'	6'	7'	8'	9'
1'	24	23	24						
2'	35	34	35						
3'	32	33	32						
4'	25	25	25						
5'	18	19	18						
6'	13	13	13						
7'	10	10	10						
8'	7	7	7						
9'	6	6	6						

2' From Wall-3' On Center

Distance From Ceiling in Feet	1'	2'	3'	4'	5'	6'	7'	8'	9'
1'	19	13	19						
2'	26	23	26						
3'	23	21	23						
4'	17	17	17						
5'	13	13	13						
6'	9	10	9						
7'	7	7	7						
8'	6	6	6						
9'	4	4	4						

18w Quad Tube Lamp

2' From Wall-2' On Center

Distance From Ceiling in Feet	1'	2'	3'	4'	5'	6'	7'	8'	9'
1'	33	30	33						
2'	48	46	48						
3'	38	38	38						
4'	28	28	28						
5'	20	20	20						
6'	15	15	15						
7'	12	12	12						
8'	10	10	10						
9'	8	8	8						

2' From Wall-3' On Center

Distance From Ceiling in Feet	1'	2'	3'	4'	5'	6'	7'	8'	9'
1'	22	16	27						
2'	36	27	36						
3'	26	25	26						
4'	19	19	19						
5'	14	14	14						
6'	11	11	11						
7'	9	9	9						
8'	7	7	7						
9'	6	6	6						

Footcandle values are initial, rounded off and based on minimum of six units.

Job Information

Type:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • D0808