

Expert Line Managed Industrial Switch with M-Ring Function 16x 10/100 Base-TX, 2x 10/100/1000Base-T (100/1000 Base-X SFP Ports) - User Manual

General

Ethernet is an international standard that has been proven in millions of applications worldwide, ensuring the compatibility of components from various vendors. The IP protocol has already left the in-house environment and is using also in harsh environments (industrial solutions). What is more the integration of the industrial network with the data network is easily done without protocol conversion.

The new Managed Expert Line Industrial Switches meet the high reliability requirements demanded by industrial applications. Using fiber port can extend the connection distance that increases the network elasticity and performance. The devices are very compact and include:

- 8 Port Gigabit Ethernet switches
- 10 Port Gigabit Ethernet switches
- 18 Port Gigabit Ethernet switches

For particularly demanding uses, the industrial switches are designed in a suitably robust construction with an integrated clamping device for direct assembly on 35 mm DIN rails.

This new Expert Line Switches are providing also extensive management function and offering the possibility to build fiber optic m-rings for redundancy. The ultra-fast protection mechanism provides short reaction time for missing critical and fail sensitive applications.



Gigabit Ethernet Switch

The contents of this manual are based on the table below listing firmware version, software kernel version, and hardware version. If the switch functions are different from the description of the manual, please contact the local sale dealer for more information.

Firmware Version	V1.10
Kernel Version	V2.10
Hardware Version	-----

FCC Warning

This Equipment has been tested and found to comply with the limits for a Class-A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy. It may cause harmful interference to radio communications if the equipment is not installed and used in accordance with the instructions. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient Increase the separation between the equipment and receiver.
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CE Mark Warning

This is a Class-A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Introduction

The 16 10/100TX + 2 10/100/1000T/Mini-GBIC Combo w/ M-Ring L2 Managed Industrial Switch is a cost-effective solution and meets the high reliability requirements demanded by industrial applications. Using fiber port can extend the connection distance that increases the network elasticity and performance.

Hardware features

Standard	<p>IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3z Gigabit fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree/ IEEE802.1w Rapid Spanning Tree IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE 802.1x User Authentication (Radius) IEEE802.1ab LLDP</p>
Switch Architecture	<p>Back-plane (Switching Fabric): 5.6Gbps Packet throughput ability(Full-Duplex): 8.3Mpps @64bytes</p>
Transfer Rate	<p>14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Fiber Ethernet port</p>
Packet Buffer	1Mbits
MAC Address	8K MAC address table
Flash ROM	4Mbytes
DRAM	32Mbytes
Connector	<p>10/100TX: 16 x RJ-45 10/100/1000T/ Mini-GBIC Combo: 2 x RJ-45 + 2 x 100/1000 SFP sockets RS-232 connector: RJ-45 type</p>
Network Cable	<p>10Base-T: 2-pair UTP/STP Cat. 3, 4, 5/ 5E cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/ 5E cable EIA/TIA-568 100-ohm (100m) 1000Base-TX: 2-pair UTP/STP Cat. 5/ 5E cable EIA/TIA-568 100-ohm (100m)</p>
Optical Fiber	<p>Multi-mode: 50/125um~62.5/125um Single mode: 9/125um Available distance: 2km (Multi-mode)/30km (Single-mode) Wavelength: 1310nm (Multi-mode/Single-mode)</p>
Protocol	CSMA/CD
LED	<p>Per unit: Power (Green), Power 1 (Green), Power 2 (Green), Fault (Red), Master (Green) 16 10/100TX : Link/Activity (Green), Full duplex/Collision (Amber) Giga Copper: Link/Activity (Green), Speed (1000Mbps Green) SFP: Link/Activity (Green)</p>
Power Supply	DC 12~48V (Source Input should be lower than 240W), Redundant power with polarity reverse protect function and removable terminal block
Power Consumption	11.5 Watts (max)

Operating Humidity	5% to 95% (Non-condensing)
Operating Temperature	Standard: -10°C ~ 60°C Wide Operating Temperature: -40°C ~ 75°C
Storage Temperature	-40°C ~ 85°C
Case Dimension	IP-30, 69mm (W) x 132mm (D) x 176mm (H)
Fan Number	0
Installation	DIN rail and wall mount ear
EMI	FCC Class A, CE EN61000-4-2 (ESD), CE EN61000-4-3 (RS), CE EN-61000-4-4 (EFT), CE EN61000-4-5 (Surge), CE EN61000-4-6 (CS), CE EN61000-4-8, CE EN61000-4-11, CE EN61000-4-12, CE EN61000-6-2, CE EN61000-6-4
Safety	UL, cUL, CE/EN60950-1
Stability Testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)

Software features

Management	SNMP v1 v2c, v3/ Web/Telnet/CLI/NS-View
SNMP MIB	RFC 1215 Trap, RFC1213 MIBII, RFC 1157 SNMP MIB, RFC 1493 Bridge MIB, RFC 2674 VLAN MIB, RFC 1643 , RFC 1757, RSTP MIB, Private MIB
VLAN	Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096.) GVRP (256 Groups)
Port Trunk with LACP	LACP Port Trunk: 4 Trunk groups/Maximum 4 trunk members
LLDP**	Supports LLDP allowing switch to advertise its identification and capability on the LAN
Spanning tree	IEEE802.1d spanning tree IEEE802.1w rapid spanning tree.
M-Ring	Supports M-ring, Dual Homing, Couple Ring and Central Ring Topology Provides redundant backup feature and the recovery time below 20ms
Quality of Service	The quality of service determined by port, Tag and IPv4 Type of service, IPv4/IPv6 Different Service
Class of Service	Supports IEEE802.1p class of service, per port provides 4 priority queues
Port Security	Supports 100 entries of MAC address for static MAC and another 100 for MAC filter

Port Mirror	Supports 3 mirroring types: "RX, TX and Both packet".
IGMP	Supports IGMP snooping v1,v2 256 multicast groups and IGMP query Supports multicast filter
IP Security	Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder.
Login Security	Supports IEEE802.1X Authentication/RADIUS
Bandwidth Control	Supports ingress packet filter and egress packet limit The egress rate control supports all of packet type and the limit rates are 100K~250Mbps Ingress filter packet type combination rules are Broadcast/Multicast/Unknown Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all of packet. The packet filter rate can be set from 100k to 250Mbps
Flow Control	Supports Flow Control for Full-duplex and Back Pressure for Half-duplex
System Log	Supports System log record and remote system log server
SMTP	Supports SMTP Server and 6 e-mail accounts for receiving event alert
Relay Alarm	Provides one relay output for port breakdown, power fail Alarm Relay current carry ability: 1A @ DC24V
SNMP Trap	Up to 3 Trap stations Cold start, Port link up, Port link down, Authentication Failure, Private Trap for power status, Port Alarm configuration, Fault alarm, M-Ring topology change
DHCP	Provides DHCP Client/ DHCP Server functions
DNS	Provides DNS client feature and supports Primary and Secondary DNS server
SNTP	Supports SNTP to synchronize system clock in Internet
Firmware Update	Supports TFTP firmware update
Configuration Upload/Download	Supports binary format configuration file for system quick installation
ifAlias	Each port allows importing 128bits of alphabetic string of word on SNMP and CLI interface

Package Contents

Please refer to the package content list below to verify them against the checklist.

- Industrial Gigabit Ethernet Switch with M-Ring 16x 10/100/1000Base-T 2x 100/1000Base-X SFP Combo Port
- User manual x1
- RJ-45 to DB9-Female cable x1
- Pluggable Terminal Block x1
- Mounting plate x2

Compare the contents of the industrial switch with the standard checklist above. If any item is damaged or missing, please contact the local dealer for service.

Hardware description


In this paragraph, it will describe the Industrial switch’s hardware spec, port, cabling information, and wiring installation.

Physical Dimension

Industrial Gigabit Ethernet Switch with M-Ring 16x 10/100/1000Base-T 2x 100/1000Base-X SFP Combo Port dimension is 69 x 132 x 176 mm (w x d x h).

Front Panel

Here is the front panel of the Industrial Gigabit Ethernet Switch with M-Ring 16x 10/100/1000Base-T 2x 100/1000Base-X SFP Combo Port shown as below.

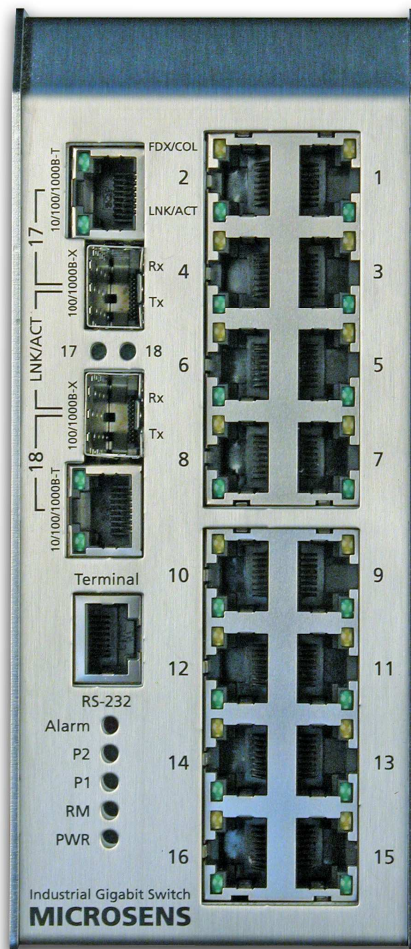

Front Panel of the industrial switch

Bottom View

The bottom panel of the the Industrial Gigabit Ethernet Switch with M-Ring 16x 10/100/1000Base-T 2x 100/1000Base-X SFP Combo Port has one terminal block connector in which has two DC power inputs.



Top Panel of the industrial switch

LED Indicators

There are diagnostic LED indicators located on the front panel of the industrial switch. They provide real-time information of system and optional status. The following table provides description of the LED status and their meanings for the switch.

LED	Color	Status	Meaning
PWR	Green	On	The switch unit is power on
		Off	No power
R.M.	Green	On	The industrial switch is the master of M-Ring group
		Off	The industrial switch is not a ring master in M-Ring group
PWR1	Green	On	Power 1 is active
		Off	Power 1 is inactive
PWR2	Green	On	Power 2 is active
		Off	Power 2 is inactive
FAULT	Red	On	Power or port failure
		Off	No failure
P17, P18 (RJ-45)	Green (Upper LED)	On	A network device is detected.
		Blinking	The port is transmitting or receiving packets from the TX device.

		Off	No device attached	
		Green (Lower LED)	On	1000M
			Off	10/100M
Link/Active (P17, P18 SFP)	Green	On	The SFP port is linking	
		Blinks	The port is transmitting or receiving packets from the TX device.	
		Off	No device attached	
P1 ~ P16	Green	On	A network device is detected.	
		Blinking	The port is transmitting or receiving packets from the TX device.	
		Off	No device attached	
	Amber	On	The port is operating in full-duplex mode.	
		Blinking	Collision of Packets occurs.	
		Off	The port is in half-duplex mode or no device is attached.	
FWD (P1 ~ P8)	Green	Green	A powered device is connected utilizing Power over Ethernet on the port	
		Off	No device is connected or power forwarding fails	

Hardware Installation

In this paragraph, we will describe how to install the 16 10/100/1000T + 2 10/100/1000T/ 100/1000 SFP Combo w/ M-Ring Managed Switch and the installation points to be attended to it.

Installation Steps


- Unpack the Industrial switch packing
- Check if the DIN-Rail is screwed on the Industrial switch or not. If not, please refer to **DIN-Rail Mounting** section for DIN-Rail installation. If user wants to wall mount the Industrial switch, then please refer to **Wall Mount Plate Mounting** section for wall mount plate installation
- To hang the Industrial switch on the DIN-Rail track or wall, please refer to the **Mounting Installation** section
- Power on the Industrial switch. Please refer to the **Wiring the Power Inputs** section for knowing the information about how to wire the power. The power LED on the Industrial switch will light up. Please refer to the **LED Indicators** section for indication of LED lights
- Prepare the twisted-pair, straight through Category 5e/above cable for Ethernet connection
- Insert one side of RJ-45 cable into the Industrial switch Ethernet port (RJ-45 port) and another side of RJ-45 cable to the network device's Ethernet port (RJ-45 port), e.g. Switch, PC or Server. The UTP port (RJ-45) LED on the industrial switch will light up when

the cable is connected with the network device. Please refer to the **LED Indicators** section for LED light indication

- When all connections are set and LED lights all show in normal, the installation is complete

DIN-Rail Mounting


The DIN-Rail is screwed on the industrial switch when out of factory. If the DIN-Rail is not screwed on the industrial switch, please see the following pictures to screw the DIN-Rail on the switch. Follow the steps below to hang the industrial switch.

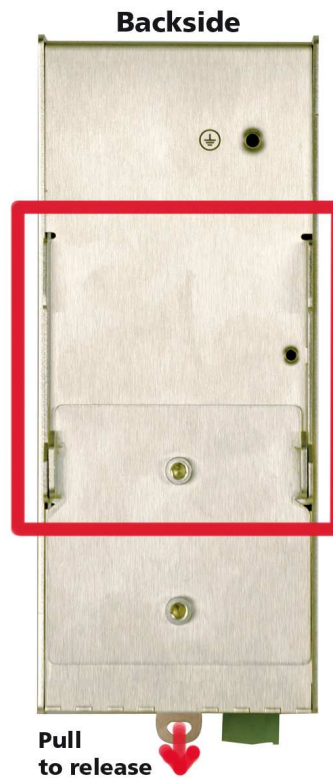

- First, insert the top of DIN-Rail into the track




- Then, lightly push the DIN-Rail into the track

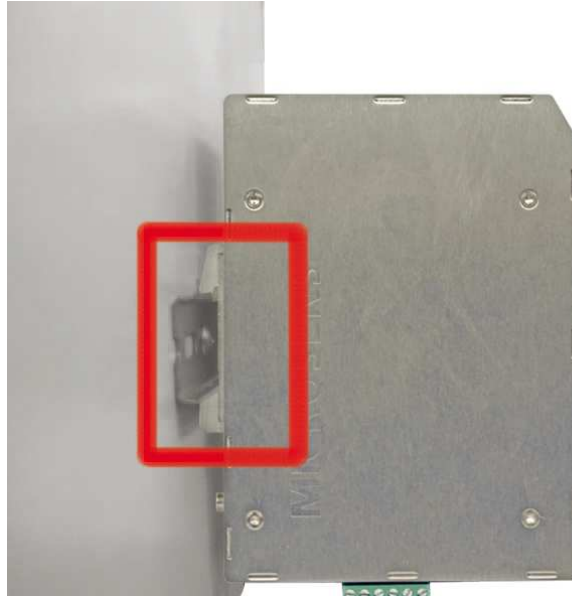


- Check if the DIN-Rail is tightened on the track or not
- To remove the industrial switch from the track, reverse steps above

Wiring the Power Inputs

Please follow the steps below to insert the power wire.

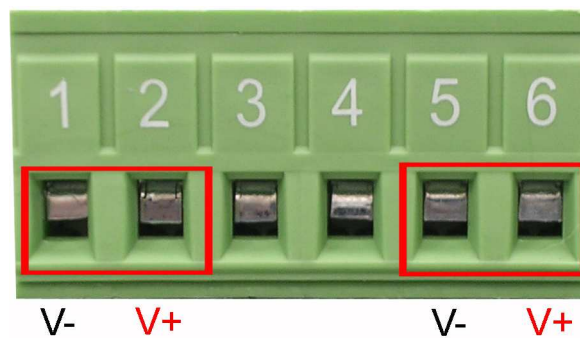

Insert the positive and negative wires into the V+ and V- contacts on the terminal block connector.




Tighten the wire-clamp screws for preventing the wires from loosing.
The wire gauge for the terminal block should be in the range between 12 ~ 24 AWG.

Wiring the Fault Alarm Contact

The fault alarm contacts are in the middle of the terminal block connector as the picture shows below. Inserting the wires, the switch will detect the fault status of the power failure, or port link failure (available for managed model) and then forms an open circuit. The following illustration shows an application example for wiring the fault alarm contacts.



Insert the wires into the fault alarm contacts (No. 3 & 4)

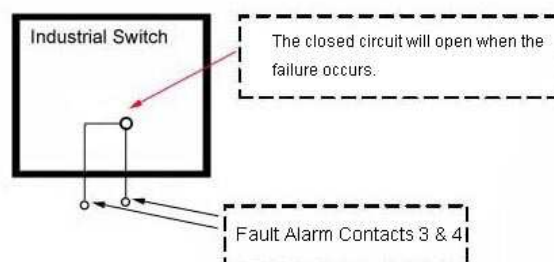

The wire gauge for the terminal block should be in the range between 12~ 24 AWG.

Cabling

- Use four twisted-pair, Category 5e or above cabling for RJ-45 port connection. The cable between the switch and the link partner (switch, hub, workstation, etc.) must be less than 100 meters (328 ft.) long
- Fiber segment using **single-mode** connector type must use 9/125 μm single-mode fiber cable. User can connect two devices in the distance up to **30km**
- Fiber segment using **multi-mode** connector type must use 50 or 62.5/125 μm multi-mode fiber cable. User can connect two devices up to **2km** distances
- **Gigabit Copper/SFP (mini-GBIC) combo port :**


The Industrial switch has the auto-detected Giga port—Gigabit Copper/SFP combo ports. The Gigabit Copper (10/100/1000T) ports should use Category 5e or above UTP/STP cable for the connection up to 1000Mbps. The small form-factor pluggable (SFP) is a compact optical transceiver used in optical communications for both telecommunication and data communications. The SFP slots supporting dual mode can switch the connection speed between 100 and 1000Mbps. They are used for connecting to the network segment with single or multi-mode fiber. You can choose the appropriate SFP transceiver to plug into the slots. Then use proper multi-mode or single-mode fiber according to the transceiver. With fiber optic, it transmits at speed up to 1000 Mbps and you can prevent noise interference from the system.

The SFP/Copper Combo port can't both work at the same time. The SFP port has the higher priority than copper port; if you insert the **1000M** SFP transceiver (which has connected to the remote device via fiber cable) into the SFP port, the connection of the accompanying copper port will link down.


If you insert the **100M** SFP transceiver into the SFP port even without a fiber connection to the remote, the connection of the accompanying copper port will link down immediately

To connect the transceiver and LC cable, please follow the steps shown below

First, insert the transceiver into the SFP slot. Notice that the triangle mark is the bottom of the slot.

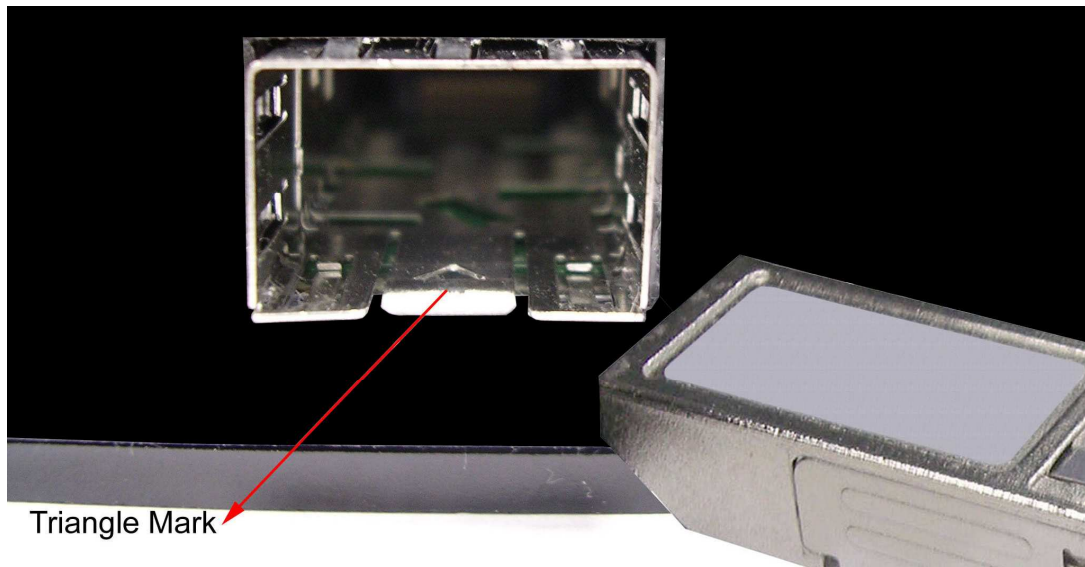


Transceiver to the SFP slot

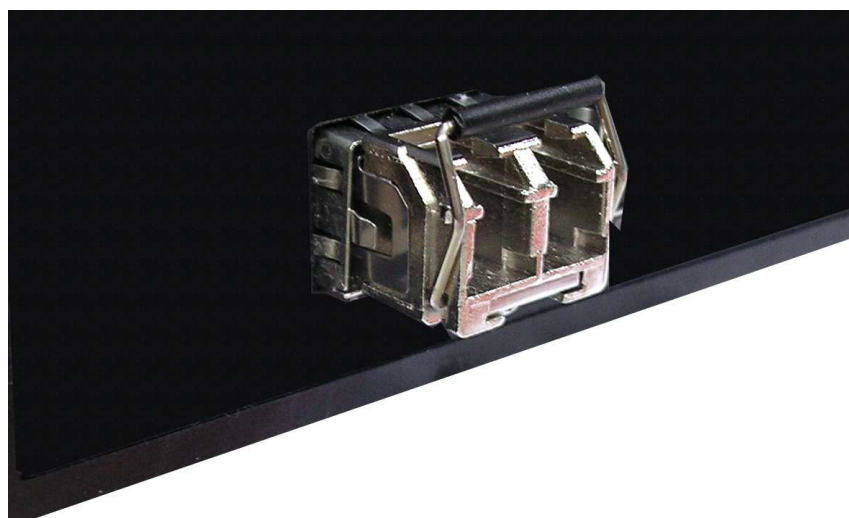


Transceiver Inserted

Second, insert the fiber cable of LC connector into the transceiver.

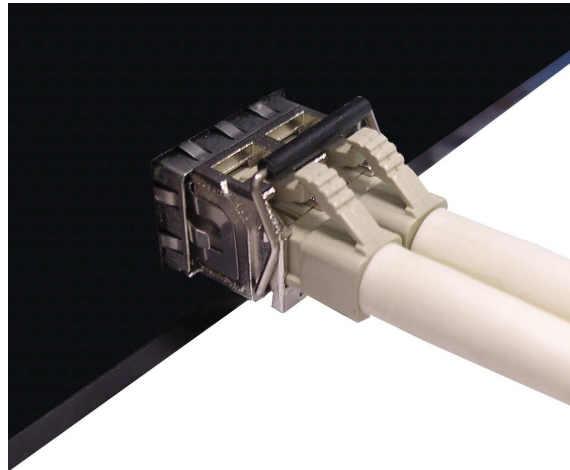


LC connector to the transceiver

To remove the LC connector from the transceiver, please follow the steps shown below:
First, press the upper side of the LC connector to release from the transceiver and pull it out.

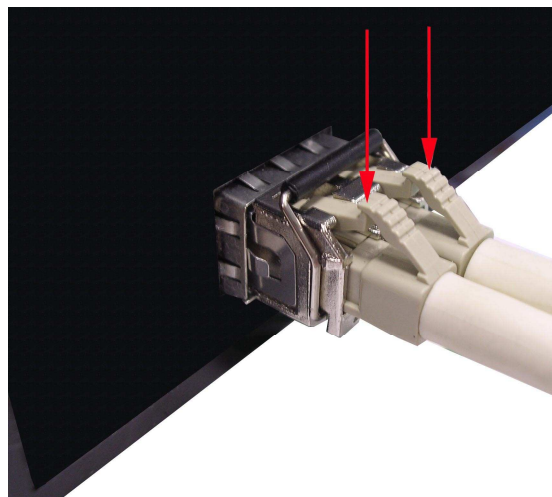

Remove LC connector


Second, push down the metal loop and pull the transceiver out by the plastic handle.

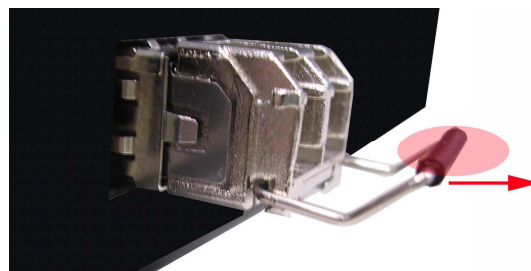

Pull out from the transceiver


Network Application

This chapter provides some sample applications to help user to have more actual idea of industrial switch function application. A sample application of the industrial switch is shown as below.

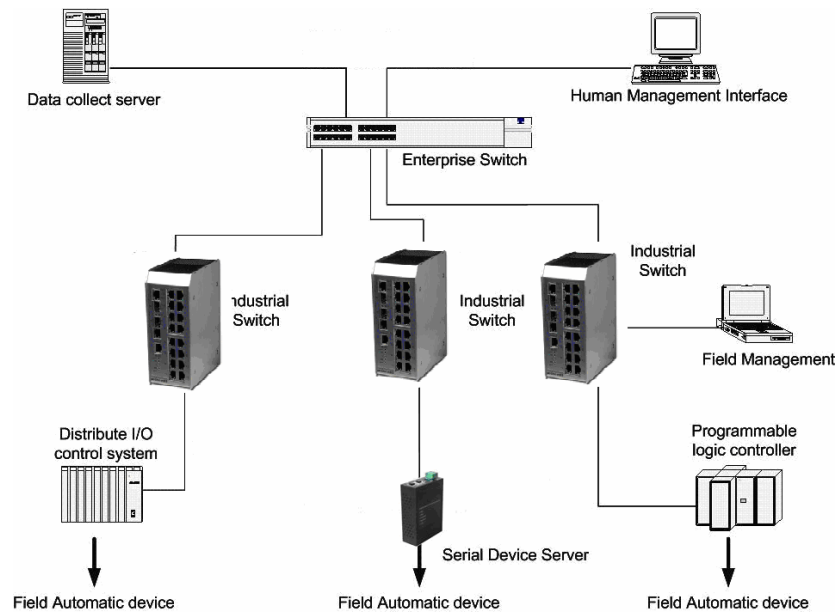


M-Ring Application

The industrial switch supports the M-Ring protocol that can help the network system to recovery from network connection failure within 20ms or less, and make the network system more reliable. The M-Ring algorithm is similar to spanning tree protocol (STP) algorithm but its recovery time is faster than STP. The following figure is a sample M-Ring application.

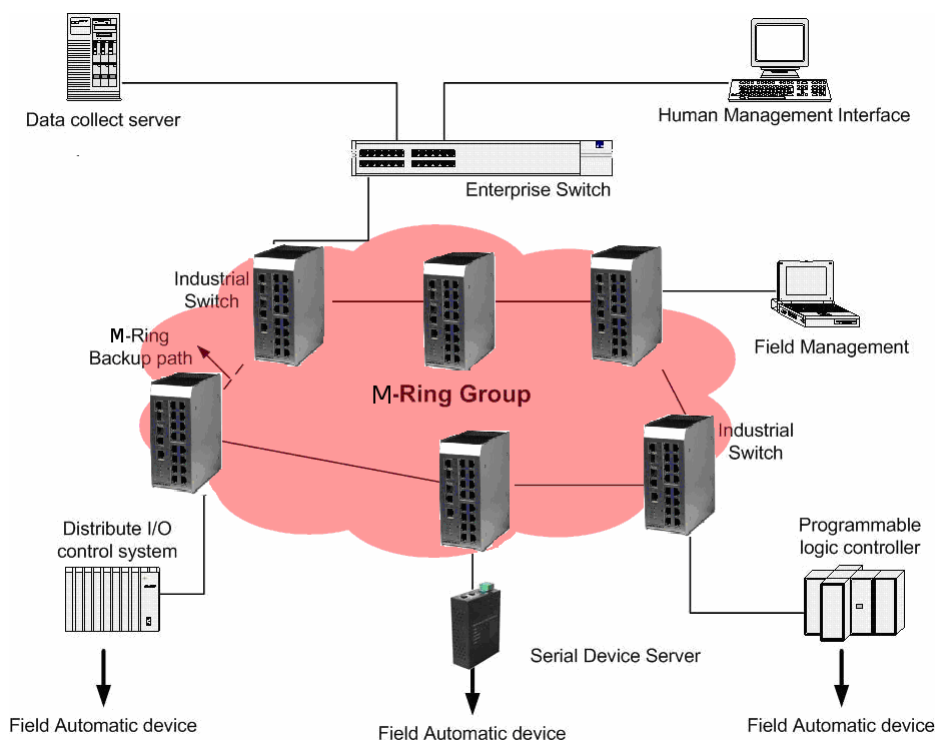

Coupling Ring Application


In the network, it may have more than one M-Ring group. By using the coupling ring function, it can connect each M-Ring for the redundant backup. It can ensure the transmissions between two ring groups not to fail. The following figure is a sample of coupling ring application. The couple ring consists of four switches—switch 1 ~ switch 4—which are connected to each other via the paths in red. Please note that the **Coupling Ring Backup Path** between switch 1 and switch 3 is blocked; it will work only when the path between switch 2 and switch 4 is broken or disconnected

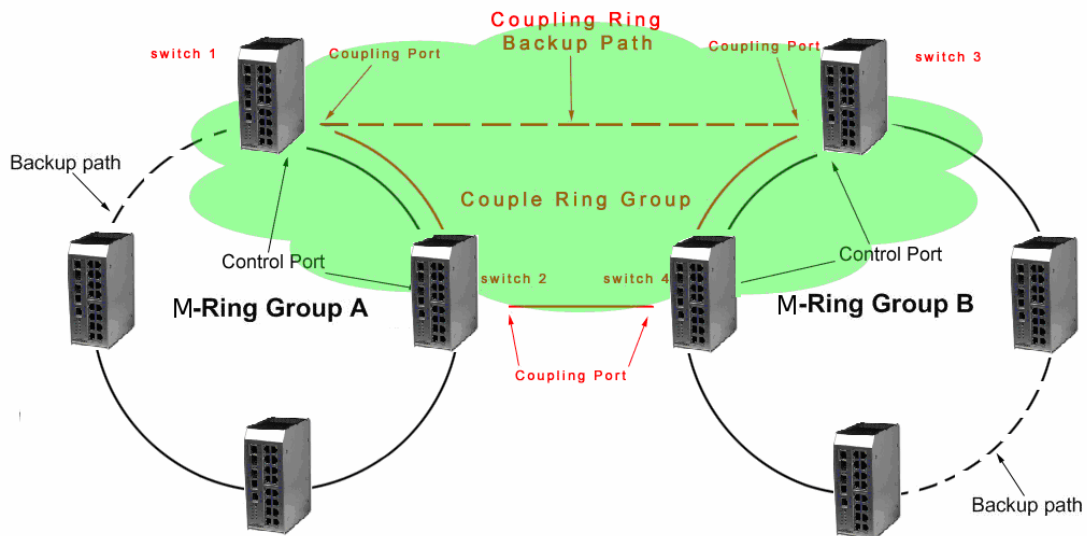

Dual Homing Application


Dual Homing function is to prevent the connection breaking from between M-Ring group and upper level/core switch. Assign two ports to be the Dual Homing port that is the backup port in an M-Ring group. The Dual Homing function works only when the M-Ring function is active. Each M-Ring group has only one Dual Homing port.

In Dual Homing application architecture, the Rapid Spanning Tree protocol of the upper level switches need to be enabled.

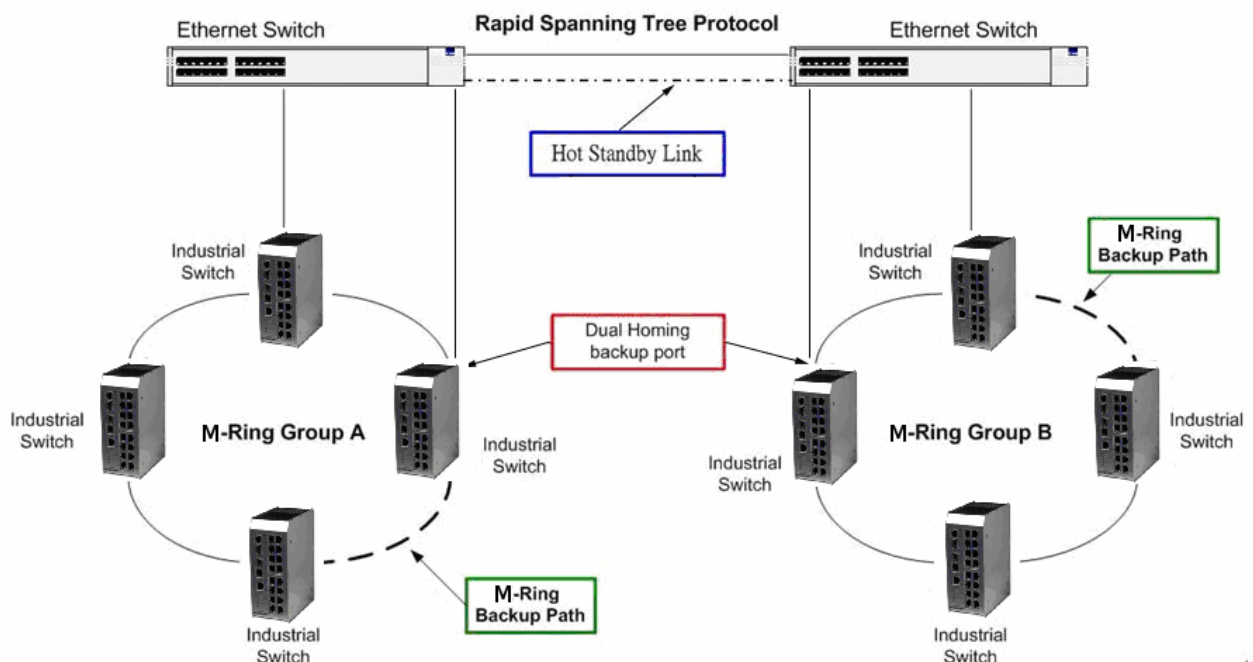

Central Ring Application



Central ring is the advanced function which supports backup connection for transmission redundant. While the connection fails, the system will recover from failure within 20 milliseconds. Apart from that, Central Ring also can handle up to 4 rings by configuring a single switch only as the Ring Master switch.

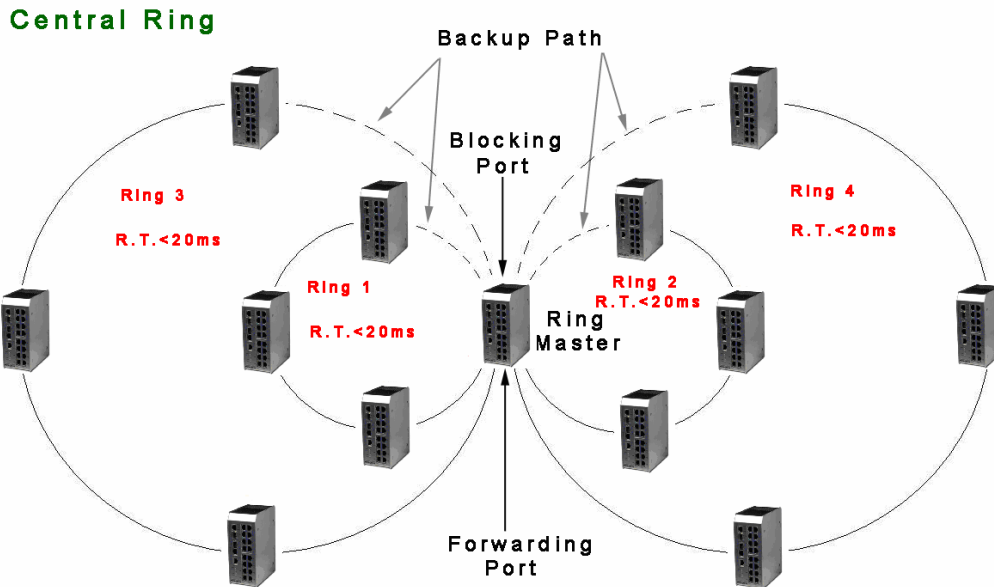

Console Management

Connecting to the Console Port

The supplied cable which one end is RS-232 connector and the other end is RJ-45 connector. Attach the end of RS-232 connector to PC or terminal and the other end of RJ-45 connector to the console port of switch. The connected terminal or PC must support the terminal emulation program.

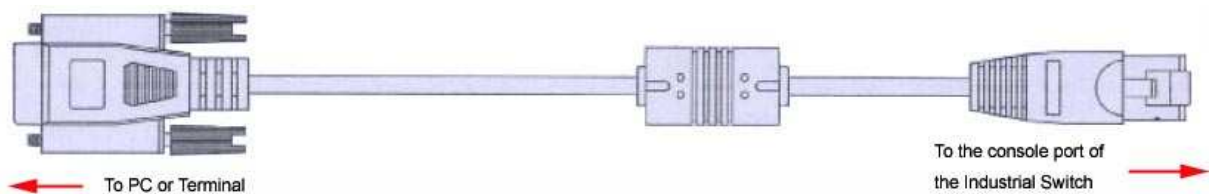


Pin Assignment

DB9 Connector	RJ-45 Connector
NC	1 Orange/White
2	2 Orange
3	3 Green/White
NC	4 Blue
5	5 Blue/White
NC	6 Green
NC	7 Brown/White
NC	8 Brown

Login in the Console Interface

When the connection between Switch and PC is ready, turn on the PC and run a terminal emulation program or **Hyper Terminal** and configure its **communication parameters** to match the following default characteristics of the console port:


Baud Rate: 9600 bps
Data Bits: 8
Parity: none
Stop Bit: 1
Flow control: None

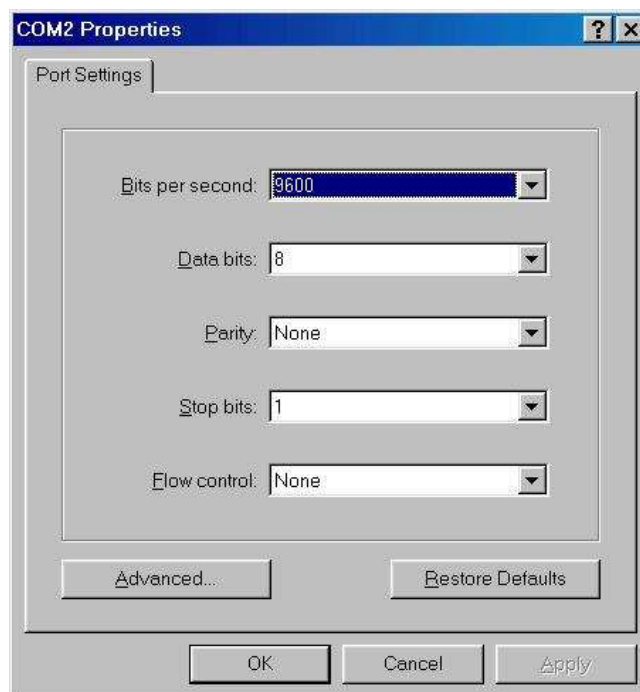

The settings of communication parameters

After finishing the parameter settings, click **"OK"**. When the blank screen shows up, press **Enter** key to bring out the login prompt. Key in the **"root"**(default value) for the both User name and


Password (use **Enter** key to switch), then press **Enter** key and the Main Menu of console management appears. Please see the figure for login screen as below.

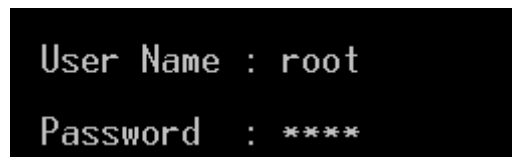

Console login interface

CLI Management

The system supports a command line interface management–CLI. After you have logged in the system by typing in user name and password, you will see a command prompt. To enter CLI management interface, enter “**enable**” command.

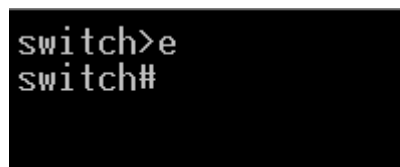

CLI command interface

The following table lists the CLI commands and description.

Commands Level

Modes	Access Method	Prompt	Exit Method	About This Mode ¹
User EXEC	Begin a session with your switch.	switch>	Enter logout or quit.	The user commands available at the user level are a subset of those available at the privileged level. Use this mode to <ul style="list-style-type: none"> • Perform basic tests. • Displays system information.
Privileged EXEC	Enter the enable command while in user EXEC mode.	switch#	Enter disable to exit.	The privileged command is advance mode Privileged this mode to <ul style="list-style-type: none"> • Displays advance function status • Save configures
Global Configuration	Enter the configure command while in privileged EXEC mode.	switch (config) #	To exit to privileged EXEC mode, enter exit or end	Use this mode to configure parameters that apply to your switch as a whole.
VLAN database	Enter the vlan database command while in privileged EXEC mode.	switch (vlan)#	To exit to user EXEC mode, enter exit.	Use this mode to configure VLAN-specific parameters.
Interface configuration	Enter the interface command (with a specific interface) while in global configuration mode	switch (config-if)#	To exit to global configuration mode, enter exit. To exist to privileged EXEC mode, or end.	Use this mode to configure parameters for the switch and Ethernet ports.

Web-Based Management

This section introduces the configuration and functions of the Web-Based management.

About Web-based Management

On CPU board of the switch there is an embedded HTML web site residing in flash memory, which offers advanced management features and allow users to manage the switch from anywhere on the network through a standard browser such as Microsoft Internet Explorer.

The Web-Based Management supports Internet Explorer 6.0 or later version. And, it is applied for Java Applets for reducing network bandwidth consumption, enhance access speed and present an easy viewing screen.

Preparing for Web Management

Before using web management, install the industrial switch on the network and make sure that any one of the PCs on the network can connect with the industrial switch through the web browser. The industrial switch default value of IP, subnet mask, username and password are as follows:

- IP Address: **192.168.16.1**
- Subnet Mask: **255.255.255.0**
- Default Gateway: **192.168.16.254**
- User Name: **root**
- Password: **root**

System Login

1. Launch the Internet Explorer on the PC
2. Key in "http://" + " the IP address of the switch", and then Press "**Enter**".



3. The login screen will appear right after
4. Key in the user name and password. The default user name and password are the same as "**root**"
5. Press "**Enter**" or "**OK**", and then the home screen of the Web-based management appears as below:



Login screen

System Information

User can assign the system name, description, location and contact personnel to identify the switch. The version table below is a read-only field to show the basic information of the switch.

- **System Name:** Assign the name of switch. The maximum length is 64 bytes
- **System Description:** Displays the description of switch.
- **System Location:** Assign the switch physical location. The maximum length is 64 bytes
- **System Contact:** Enter the name of contact person or organization
- **Firmware Version:** Displays the switch's firmware version
- **Kernel Version:** Displays the kernel software version
- **MAC Address:** Displays the unique hardware address assigned by manufacturer (default)

System Information

System Name	<input type="text"/>
System Description	16 10/100TX + 2 10/100/1000T/Mini-GBIC Combo w/X-Ring Man.
System Location	<input type="text"/>
System Contact	<input type="text"/>

Firmware Version	v1.10
Kernel Version	v2.10
MAC Address	0060A7123456

System information interface

IP Configuration

The switch is a network device which needs to be assigned an IP address for being identified on the network. Users have to decide a means of assigning IP address to the switch

- **DHCP Client:** Enable or disable the DHCP client function. When DHCP client function is enabled, the industrial switch will be assigned an IP address from the network DHCP server. The default IP address will be replaced with an IP address which is assigned by the DHCP server. After user click "**Apply**" button, a pop-up dialog show up. It is to inform the user that when the DHCP client is enabled, the current IP will lose and user should find the new IP on the DHCP server
- **IP Address:** Assign the IP address that the network is using. If DHCP client function is enabled, then user needn't assign the IP address manually. Instead, the network DHCP server will assign the IP address for the industrial switch and display it in this column. The default IP is 192.168.16.1
- **Subnet Mask:** Assign the subnet mask of the IP address. If DHCP client function is

disabled, the user has to assign the subnet mask in this column field

- **Gateway:** Assign the network gateway for the switch. If DHCP client function is disabled, the user has to assign the gateway in this column field. The default gateway is 192.168.16.254
- **DNS1:** Assign the primary DNS IP address
- **DNS2:** Assign the secondary DNS IP address

And then, click

IP Configuration

DHCP Client :

IP Address	<input type="text" value="192.168.16.1"/>
Subnet Mask	<input type="text" value="255.255.255.0"/>
Gateway	<input type="text" value="192.168.16.254"/>
DNS1	<input type="text" value="0.0.0.0"/>
DNS2	<input type="text" value="0.0.0.0"/>

IP configuration interface

DHCP Server—System configuration

DHCP is the abbreviation of Dynamic Host Configuration Protocol that is a protocol for assigning dynamic IP addresses to devices on a network. With dynamic addressing, a device can have a different IP address every time it connects to the network. In some systems, the device's IP address can even change while it is still connected. DHCP also supports a mix of static and dynamic IP addresses. Dynamic addressing simplifies network administration because the software keeps track of IP addresses rather than requiring an administrator to manage the task. This means that a new computer can be added to a network without the hassle of manually assigning it a unique IP address.

The system provides the DHCP server function. Having enabled the DHCP server function, the switch system will be configured as a DHCP server.

- **DHCP Server:** Enable or Disable the DHCP Server function. Enable – the switch will be the DHCP server on your local network
- **Low IP Address:** the dynamic IP assign range. Low IP address is the beginning of the dynamic IP assigns range. For example: dynamic IP assign range is from 192.168.1.100 ~ 192.168.1.200. 192.168.1.100 will be the Low IP address
- **High IP Address:** the dynamic IP assign range. High IP address is the end of the dynamic IP assigns range. For example, dynamic IP assign range is from 192.168.1.100 ~ 192.168.1.200. Therefore, 192.168.1.200 is the High IP address
- **Subnet Mask:** The dynamic IP assign range subnet mask
- **Gateway:** The gateway in your network
- **DNS:** Domain Name Server IP Address in your network
- **Lease Time (sec):** It is the time period that system will reset the dynamic IP assignment

to ensure the dynamic IP won't have been occupied for a long time; otherwise the server won't know that the dynamic IP is idle

And then, click

DHCP Server - System Configuration

System Configuration Client Entries Port and IP Binding

DHCP Server : ▼

Low IP Address	192.168.16.100
High IP Address	192.168.16.200
Subnet Mask	255.255.255.0
Gateway	192.168.16.254
DNS	0.0.0.0
Lease Time (sec)	86400

DHCP Server Configuration interface

DHCP Client—Client Entries

When the DHCP server function is enabled, the system will collect the DHCP client information including the assigned IP address, the MAC address of the client device, the IP assigning type, status and lease time.

DHCP Server - Client Entries

System Configuration Client Entries Port and IP Binding

IP addr	Client ID	Type	Status	Lease
192.168.16.101	00:99:88:77:66:55	dynamic	DHCP	86383
192.168.16.100	00:0F:38:FF:F5:01	dynamic	DHCP	85762

DHCP Client Entries interface

DHCP Server—Port and IP Bindings

Assign the dynamic IP address bound with the port to the connected client. The user is allowed to fill each port column with one particular IP address. When the device is connecting to the port and asks for IP assigning, the system will assign the IP address bound with the port

DHCP Server - Port and IP Binding

Port	IP
Port.01	0.0.0.0
Port.02	0.0.0.0
Port.03	0.0.0.0
Port.04	0.0.0.0
Port.05	0.0.0.0
Port.06	0.0.0.0
Port.07	0.0.0.0
Port.08	0.0.0.0
Port.09	0.0.0.0
Port.10	0.0.0.0
Port.11	0.0.0.0
Port.12	0.0.0.0
Port.13	0.0.0.0
Port.14	0.0.0.0
Port.15	0.0.0.0
Port.16	0.0.0.0
Port.17	0.0.0.0
Port.18	0.0.0.0

Port and IP Bindings interface

TFTP—Update Firmware

It provides the functions to allow the user to update the switch firmware. Before updating, make sure you have your TFTP server ready and the firmware image is on the TFTP server.

- **TFTP Server IP Address:** Fill in your TFTP server IP
- **Firmware File Name:** the name of firmware image
- Click .

TFTP - Update Firmware

Update Firmware	Restore Configuration	Backup Configuration
TFTP Server IP Address	192.168.16.2	
Firmware File Name	image.bin	

Update Firmware interface

TFTP—Restore Configuration

You can restore a previous backup configuration from the TFTP server to recover the settings. Before doing that, you must locate the image file on the TFTP server first and the switch will download back the flash image

- **TFTP Server IP Address:** Fill in your TFTP server IP
- **Restore File Name:** Fill in the correct restore file name
- Click .


TFTP - Restore Configuration

Update Firmware	Restore Configuration	Backup Configuration
TFTP Server IP Address	192.168.16.2	
Restore File Name	data.bin	
Apply Help		

Restore Configuration interface

TFTP—Backup Configuration

You can back up the current configuration from flash ROM to the TFTP server for the purpose of recovering the configuration later. It helps you to avoid wasting time on configuring the settings by backing up the configuration.

- **TFTP Server IP Address:** Fill in your TFTP server IP
- **Backup File Name:** Fill the file name
- Click  .

TFTP - Backup Configuration

Update Firmware	Restore Configuration	Backup Configuration
TFTP Server IP Address	192.168.16.2	
Backup File Name	data.bin	
Apply Help		

Backup Configuration interface

System Event Log—Syslog Configuration

This page allows the user to decide whether to send the system event log, and select the mode which the system event log will be sent to client only, server only, or both client and server. What kind of event log will be issued to the client/server depends on the selection on the **Event Configuration** tab. There are five types of event—Device Cold Start, Device Warm Start, Authentication Failure, M-Ring Topology Change, and Port Event—available to be issued as the event log.

- **Syslog Client Mode:** Select the system log mode—**Client Only**, **Server Only**, or **Both**. 'Client Only' means the system event log will only be sent to this interface of the switch, but on the other hand 'Server Only' means the system log will only be sent to the remote system log server with its IP assigned. If the mode is set in 'Both', the system event log will be sent to the remote server and this interface
- **System Log Server IP Address:** When the 'Syslog Mode' item is set as Server Only/Both, the user has to assign the system log server IP address to which the log will be sent

- Click **Reload** to refresh the events log
- Click **Clear** to clear all current events log
- After configuring, click **Apply**

System Event Log - Syslog Configuration

Syslog Configuration interface

System Event Log—SMTP Configuration

Simple Mail Transfer Protocol (SMTP) is the standard for email transmissions across the network. You can configure the SMTP server IP, mail subject, sender, mail account, password, and the recipient email addresses which the e-mail alert will send to. There are also five types of event—Device Cold Start, Device Warm Start, Authentication Failure, M-Ring Topology Change, and Port Event—available to be issued as the e-mail alert. Besides, this function provides the authentication mechanism including an authentication step through which the client effectively logs in to the SMTP server during the process of sending e-mail alert.

- **Email Alert:** With this function being enabled, the user is allowed to configure the detail settings for sending the e-mail alert to the SMTP server when the events occur
- **SMTP Server IP:** set up the mail server IP address (when **Email Alert** enabled, this function will then be available)
- **Sender:** key in a complete email address, e.g. switch101@123.com, to identify where the event log comes from
- **Authentication:** Having ticked this checkbox, the mail account, password and confirm password column fields will then show up. Configure the email account and password for authentication when this switch logs in to the SMTP server
- **Mail Account:** Set up the email account, e.g. johnadmin, to receive the email alert. It must be an existing email account on the mail server

- **Password:** The email account password
- **Confirm Password:** reconfirm the password
- **Rcpt e-mail Address 1 ~ 6:** you can assign up to 6 e-mail accounts also to receive the alert
- click

System Event Log - SMTP Configuration

<u>Syslog Configuration</u>	SMTP Configuration	Event Configuration
E-mail Alert: <input type="button" value="Enable"/>		
SMTP Server IP Address : <input type="text" value="192.168.16.5"/>		
Sender : <input type="text" value="switch101@123.com"/>		
<input checked="" type="checkbox"/> Authentication		
Mail Account : <input type="text" value="johnadmin"/>		
Password : <input type="password" value="****"/>		
Confirm Password : <input type="password" value="****"/>		
Rcpt e-mail Address 1 : <input type="text" value="supervisor@123.com"/>		
Rcpt e-mail Address 2 : <input type="text"/>		
Rcpt e-mail Address 3 : <input type="text"/>		
Rcpt e-mail Address 4 : <input type="text"/>		
Rcpt e-mail Address 5 : <input type="text"/>		
Rcpt e-mail Address 6 : <input type="text"/>		
<input type="button" value="Apply"/> <input type="button" value="Help"/>		

SMTP Configuration interface

System Event Log—Event Configuration

Having ticked the **Syslog/SMTP** checkboxes, the event log/email alert will be sent to the system log server and the SMTP server respectively. Also, Port event log/alert (link up, link down, and both) can be sent to the system log server/SMTP server respectively by setting the trigger condition.

- **System event selection:** There are 4 event types—Device Cold Start, Device Warm Start, Authentication Failure, and M-ring Topology Change. The checkboxes are not available for ticking unless the **Syslog Client Mode** on the Syslog Configuration tab and the **E-mail Alert** on the SMTP Configuration tab are enabled first
 - **Device cold start:** When the device executes cold start action, the system will issue a log event/email alert to the system log/SMTP server respectively
 - **Device warm start:** When the device executes warm start, the system will issue a log event/email alert to the system log/SMTP server respectively
 - **Authentication Failure:** When the SNMP authentication fails, the system will issue a log event/email alert to the system log/SMTP server respectively
 - **M-ring topology change:** When the M-ring topology has changed, the system will issue a log event/email alert to the system log/SMTP server respectively

- **Port event selection:** Also, before the drop-down menu items are available, the **Syslog Client Mode** selection item on the Syslog Configuration tab and the **E-mail Alert** selection item on the SMTP Configuration tab must be enabled first. Those drop-down menu items have 3 selections—**Link UP**, **Link Down**, and **Link UP & Link Down**. Disable means no event will be sent to the system log/SMTP server
 - **Link UP:** The system will only issue a log message when the link-up event of the port occurs
 - **Link Down:** The system will only issue a log message when the link-down event of port occurs
 - **Link UP & Link Down:** The system will issue a log message at the time when port connection is link-up and link-down

System Event Log - Event Configuration

Syslog Configuration
SMTP Configuration
Event Configuration

System event selection

Event Type	Syslog	SMTP
Device cold start	<input type="checkbox"/>	<input type="checkbox"/>
Device warm start	<input type="checkbox"/>	<input type="checkbox"/>
Authentication Failure	<input type="checkbox"/>	<input type="checkbox"/>
X-Ring topology change	<input type="checkbox"/>	<input type="checkbox"/>

Port event selection

Port	Syslog	SMTP
Port.01	Disable ▾	Disable ▾
Port.02	Disable ▾	Disable ▾
Port.03	Disable ▾	Disable ▾
Port.04	Disable ▾	Disable ▾
Port.05	Disable ▾	Disable ▾
Port.06	Disable ▾	Disable ▾
Port.07	Disable ▾	Disable ▾
Port.08	Disable ▾	Disable ▾
Port.09	Disable ▾	Disable ▾
Port.10	Disable ▾	Disable ▾
Port.11	Disable ▾	Disable ▾
Port.12	Disable ▾	Disable ▾
Port.13	Disable ▾	Disable ▾
Port.14	Disable ▾	Disable ▾
Port.15	Disable ▾	Disable ▾
Port.16	Disable ▾	Disable ▾
Port.17	Disable ▾	Disable ▾
Port.18	Disable ▾	Disable ▾

Apply
Help

Event Configuration interface

Fault Relay Alarm

The Fault Relay Alarm function provides the Power Failure and Port Link Down/Broken detection. With both power input 1 and power input 2 installed and the check boxes of power 1/power 2 ticked, the FAULT LED indicator will then be possible to light up when any one of the power failures occurs. As for the Port Link Down/Broken detection, the FAULT LED indicator will light up when the port failure occurs; certainly the check box beside the port must be ticked first. Please refer to the segment of '**Wiring the Fault Alarm Contact**' for the failure detection.

- **Power Failure:** Tick the check box to enable the function of lighting up the **FAULT LED** on the panel when power fails
- **Port Link Down/Broken:** Tick the check box to enable the function of lighting up **FAULT LED** on the panel when Ports' states are link down or broken

Fault Relay Alarm

Power Failure	
<input checked="" type="checkbox"/> Power 1	<input checked="" type="checkbox"/> Power 2
Port Link Down/Broken	
<input type="checkbox"/> Port 1	<input type="checkbox"/> Port 2
<input type="checkbox"/> Port 3	<input type="checkbox"/> Port 4
<input type="checkbox"/> Port 5	<input type="checkbox"/> Port 6
<input type="checkbox"/> Port 7	<input type="checkbox"/> Port 8
<input type="checkbox"/> Port 9	<input type="checkbox"/> Port 10
<input type="checkbox"/> Port 11	<input type="checkbox"/> Port 12
<input type="checkbox"/> Port 13	<input type="checkbox"/> Port 14
<input type="checkbox"/> Port 15	<input type="checkbox"/> Port 16
<input type="checkbox"/> Port 17	<input type="checkbox"/> Port 18
<input type="button" value="Apply"/>	

Fault Relay Alarm interface

SNTP Configuration

SNTP (Simple Network Time Protocol) is a simplified version of NTP which is an Internet protocol used to synchronize the clocks of computers to some time reference. Because time usually just advances, the time on different node stations will be different. With the communicating programs running on those devices, it would cause time to jump forward and back, a non-desirable effect. Therefore, the switch provides comprehensive mechanisms to access national time and frequency dissemination services, organize the time-synchronization subnet and the local clock in each participating subnet peer.

Daylight saving time (DST) is the convention of advancing clocks so that afternoons have more daylight and mornings have less. Typically clocks are adjusted forward one hour near the start of spring and are adjusted backward in autumn.

- **SNTP Client:** Enable or disable SNTP function to get the time from the SNTP server
- **Daylight Saving Time:** This is used as a control switch to enable/disable daylight saving period and daylight saving offset. Users can configure Daylight Saving Period and Daylight Saving Offset in a certain period time and offset time while there is no need to enable daylight saving function. Afterwards, users can just set this item as enable without assign Daylight Saving Period and Daylight Saving Offset again
- **UTC Timezone:** Set the switch location time zone. The following table lists the different location time zone for your reference

Local Time Zone	Conversion from UTC	Time at 12:00 UTC
November Time Zone	- 1 hour	11am
Oscar Time Zone	-2 hours	10 am
ADT - Atlantic Daylight	-3 hours	9 am
AST - Atlantic Standard EDT - Eastern Daylight	-4 hours	8 am
EST - Eastern Standard CDT - Central Daylight	-5 hours	7 am
CST - Central Standard MDT - Mountain Daylight	-6 hours	6 am
MST - Mountain Standard PDT - Pacific Daylight	-7 hours	5 am
PST - Pacific Standard ADT - Alaskan Daylight	-8 hours	4 am
ALA - Alaskan Standard	-9 hours	3 am
HAW - Hawaiian Standard	-10 hours	2 am
Nome, Alaska	-11 hours	1 am
CET - Central European FWT - French Winter MET - Middle European MEWT - Middle European Winter SWT - Swedish Winter	+1 hour	1 pm
EET - Eastern European, USSR Zone 1	+2 hours	2 pm
BT - Baghdad, USSR Zone 2	+3 hours	3 pm
ZP4 - USSR Zone 3	+4 hours	4 pm
ZP5 - USSR Zone 4	+5 hours	5 pm
ZP6 - USSR Zone 5	+6 hours	6 pm
WAST - West Australian Standard	+7 hours	7 pm
CCT - China Coast, USSR Zone 7	+8 hours	8 pm
JST - Japan Standard, USSR Zone 8	+9 hours	9 pm
EAST - East Australian Standard GST Guam Standard, USSR Zone 9	+10 hours	10 pm
IDLE - International Date Line NZST - New Zealand Standard NZT - New Zealand	+12 hours	Midnight

- **SNTP Sever URL:** Set the SNTP server IP address. You can assign a local network time server IP address or an internet time server IP address
- **Switch Timer:** When the switch has successfully connected to the SNTP server whose IP address was assigned in the column field of SNTP Server URL, the current coordinated

time is displayed here

- **Daylight Saving Period:** Set up the Daylight Saving beginning date/time and Daylight Saving ending date/time. Please key in the value in the format of 'YYYYMMDD' and 'HH:MM' (leave a space between 'YYYYMMDD' and 'HH:MM')
 - **YYYYMMDD:** an eight-digit year/month/day specification
 - **HH:MM:** a five-digit (including a colon mark) hour/minute specification

For example, key in '20070701 02:00' and '20071104 02:04' in the two column fields respectively to represent that DST begins at 2:00 a.m. on March 11, 2007 and ends at 2:00 a.m. on November 4, 2007
- **Daylight Saving Offset (mins):** For non-US and European countries, specify the amount of time for day light savings. Please key in the valid figure in the range of minute between 0 and 720, which means you can set the offset up to 12 hours
- Click .

Sntp Configuration

Sntp Client :

Daylight Saving Time :

UTC Timezone	(GMT+08:00)Taipei
Sntp Server URL	76.168.30.201
Switch Timer	Monday, September 03, 2007 4:35:
Daylight Saving Period	20070311 02:0 20071104 02:0
Daylight Saving Offset(mins)	0

Sntp Configuration interface

IP Security

IP security function allows the user to assign 10 specific IP addresses that have permission to manage the switch through the http and telnet services for the securing switch management. The purpose of giving the limited IP addresses permission is to allow only the authorized personnel/device can do the management task on the switch.

- **IP Security Mode:** When this option is enabled, the **Enable HTTP Server** and **Enable Telnet Server** Check boxes will then be available
- **Enable HTTP Server:** Having ticked this checkbox, the devices whose IP addresses match any one of the ten IP addresses in the Security IP1 ~ IP10 table will be given the permission to access this switch via HTTP service
- **Enable Telnet Server:** Having ticked this checkbox, the devices whose IP addresses match any one of the ten IP addresses in the Security IP1 ~ IP10 table will be given the permission to access this switch via telnet service
- **Security IP 1 ~ 10:** The system allows the user to assign up to 10 specific IP addresses for access security. Only these 10 IP addresses can access and manage the switch through the HTTP/Telnet service once **IP Security Mode** is enabled

- And then, click button to apply the configuration

Remember to execute the “Save Configuration” action, otherwise the new configuration will lose when switch power off

IP Security

IP Security Mode:

Enable HTTP Server

Enable Telnet Server

Security IP1	192.168.16.11
Security IP2	192.168.16.21
Security IP3	192.168.16.31
Security IP4	192.168.16.41
Security IP5	192.168.16.110
Security IP6	192.168.16.120
Security IP7	192.168.16.130
Security IP8	192.168.16.140
Security IP9	192.168.16.210
Security IP10	192.168.16.220

IP Security interface

User Authentication

Here you can change login user name and password for the management security issue.

- **User name:** Key in the new user name (The default is “root”)
- **Password:** Key in the new password (The default is “root”)
- **Confirm password:** Re-type the new password
- And then, click

User Authentication

User Name :	<input type="text" value="root"/>
New Password :	<input type="password" value="••••"/>
Confirm Password :	<input type="password" value="••••"/>

User Authentication interface

Port Statistics

The following chart provides the current statistic information which displays the real-time packet transfer status for each port. The user might use the information to plan and implement the network, or check and find the problem when the collision or heavy traffic occurs.

- **Port:** The port number
 - **Type:** Displays the current speed of connection to the port
 - **Link:** The status of linking—'Up' or 'Down'
 - **State:** It's set by Port Control. When the state is disabled, the port will not transmit or receive any packet
 - **Tx Good Packet:** The counts of transmitting good packets via this port
 - **Tx Bad Packet:** The counts of transmitting bad packets (including undersize [less than 64 bytes], oversize, CRC Align errors, fragments and jabbers packets) via this port
 - **Rx Good Packet:** The counts of receiving good packets via this port
 - **Rx Bad Packet:** The counts of receiving bad packets (including undersize [less than 64 bytes], oversize, CRC error, fragments and jabbers) via this port
 - **Tx Abort Packet:** The aborted packet while transmitting
 - **Packet Collision:** The counts of collision packet
 - **Packet Dropped:** The counts of dropped packet
 - **Rx Bcast Packet:** The counts of broadcast packet
 - **Rx Mcast Packet:** The counts of multicast packet
- Click button to clean all counts

Port Statistics

Port	Type	Link	State	Tx Good Packet	Tx Bad Packet	Rx Good Packet	Rx Bad Packet	Tx Abort Packet	Packet Collision	Packet Dropped	RX Bcast Packet	RX Mcast Packet
Port.01	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.02	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.03	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.04	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.05	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.06	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.07	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.08	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.09	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.10	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.11	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.12	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.13	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.14	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.15	100TX	Up	Enable	230	0	465	0	0	0	0	5	2
Port.16	100TX	Down	Enable	0	0	0	0	0	0	0	0	0
Port.17	1GTX/mGBIC	Down	Enable	0	0	0	0	0	0	0	0	0
Port.18	1GTX/mGBIC	Down	Enable	0	0	0	0	0	0	0	0	0

Port Statistics interface

Port Control

In Port control you can configure the settings of each port to control the connection parameters, and the status of each port is listed beneath.

- **Port:** select the port that you want to configure
 - **State:** Current port status. The port can be set to disable or enable mode. If the port setting is disable then will not receive or transmit any packet
 - **Negotiation:** Auto and Force. Being set as Auto, the speed and duplex mode are negotiated automatically. When you set it as Force, you have to set the speed and duplex mode manually
 - **Speed:** It is available for selecting when the Negotiation column is set as Force. When the Negotiation column is set as Auto, this column is read-only
 - **Duplex:** It is available for selecting when the Negotiation column is set as Force. When the Negotiation column is set as Auto, this column is read-only
 - **Flow Control:** Whether or not the receiving node sends feedback to the sending node is determined by this item. When enabled, once the device exceeds the input data rate of another device, the receiving device will send a PAUSE frame which halts the transmission of the sender for a specified period of time. When disabled, the receiving device will drop the packet if too much to process
 - **Security:** When the Security selection is set as 'On', any access from the device which connects to this port will be blocked unless the MAC address of the device is included in the static MAC address table. See the segment of **MAC Address Table—Static MAC Addresses**
- Click

Port Control

Port	State	Negotiation	Speed	Duplex	Flow Control	Security
Port.01	Enable	Auto	100	Full	Enable	Off
Port.02						
Port.03						
Port.04						






Port	Group ID	Type	Link	State	Negotiation	Speed Config	Duplex Actual	Flow Control Config	Flow Control Actual	Security	
Port.01	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.02	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.03	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.04	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.05	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.06	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.07	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.08	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.09	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.10	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.11	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.12	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.13	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.14	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.15	N/A	100TX	Up	Enable	Auto	100	Full	100 Full	Enable	ON	OFF
Port.16	N/A	100TX	Down	Enable	Auto	100	Full	N/A	Enable	N/A	OFF
Port.17	N/A	1GTX/mGBIC	Down	Enable	Auto	1G	Full	N/A	Enable	N/A	OFF
Port.18	N/A	1GTX/mGBIC	Down	Enable	Auto	1G	Full	N/A	Enable	N/A	OFF

Port Control interface

Port Trunk

Port trunking is the combination of several ports or network cables to expand the connection speed beyond the limits of any one single port or network cable. Link Aggregation Control Protocol (LACP), which is a protocol running on layer 2, provides a standardized means in accordance with IEEE 802.3ad to bundle several physical ports together to form a single logical channel. All the ports within the logical channel or so-called logical aggregator work at the same connection speed and LACP operation requires full-duplex mode.

Aggregator setting

- **System Priority:** A value which is used to identify the active LACP. The switch with the lowest value has the highest priority and is selected as the active LACP peer of the trunk group
- **Group ID:** There are 13 trunk groups to be selected. Assign the "**Group ID**" to the trunk group
- **LACP:** When enabled, the trunk group is using LACP. A port which joins an LACP trunk group has to make an agreement with its member ports first. Please notice that a trunk group, including member ports split between two switches, has to enable the LACP function of the two switches. When disabled, the trunk group is a static trunk group. The advantage of having the LACP disabled is that a port joins the trunk group without any handshaking with its member ports; but member ports won't know that they should be aggregated together to form a logic trunk group
- **Work ports:** This column field allows the user to type in the total number of active port up to four. With **LACP static trunk group**, e.g. you assign four ports to be the members of a trunk group whose work ports column field is set as two; the exceed ports are standby/redundant ports and can be aggregated if working ports fail. If it is a **static trunk group** (non-LACP), the number of work ports must equal the total number of group member ports
- Select the ports to join the trunk group. The system allows four ports maximum to be aggregated in a trunk group. Click  to add the port which is focused to the left field. To remove unwanted ports, select the port and click .
- When LACP enabled, you can configure LACP Active/Passive status for each port on State Activity page
- Click 
- Use  to delete Trunk Group. Select the Group ID and click 

Port Trunk - Aggregator Setting

Aggregator Setting			Aggregator Information	State Activity
System Priority				
1				
Group ID	Trunk.1	Select		
Lacp	Enable			
Work Ports	4			
Port.01 Port.02 Port.03 Port.04	<<Add Remove>>	Port.05 Port.06 Port.07 Port.08 Port.09 Port.10 Port.11 Port.12 Port.13		
Apply Delete Help				

Notice: The trunk function do not support GVRP and X-Ring.

Port Trunk—Aggregator Setting interface

Aggregator Information LACP disable

Port Trunk - Aggregator Setting

Aggregator Setting			Aggregator Information	State Activity
System Priority				
1				
Group ID	Trunk.2	Select		
Lacp	Disable			
Work Ports	2			
Port.01 Port.02	<<Add Remove>>	Port.03 Port.04 Port.05 Port.06 Port.07 Port.08 Port.09 Port.10 Port.11		
Apply Delete Help				

Notice: The trunk function do not support GVRP and X-Ring.

Assigning 2 ports to a trunk group with LACP disabled

Port Trunk - Aggregator Information

Aggregator Setting	Aggregator Information	State Activity						
<table border="1"> <tr> <td colspan="2">Static Trunking Group</td> </tr> <tr> <td>Group Key</td> <td>1</td> </tr> <tr> <td>Port Member</td> <td>1 2</td> </tr> </table>			Static Trunking Group		Group Key	1	Port Member	1 2
Static Trunking Group								
Group Key	1							
Port Member	1 2							
Static Trunking Group information								

- **Group Key:** Displays the trunk group ID
- **Port Member:** Displays the members of this static trunk group

LACP enable

Having set up the aggregator setting with LACP enabled, you will see the trunking group information between two switches on the tab of **Aggregator Information**.

Switch 1 configuration

1. Set **System Priority** of the trunk group. The default is 1.
2. Select a **trunk group ID** by pull down the drop-down menu bar.
3. Enable LACP.
4. Include the member ports by clicking the **Add** button after selecting the port number and the column field of **Work Ports** changes automatically.

Port Trunk - Aggregator Setting

Aggregator Setting
Aggregator Information
State Activity

System Priority
1

Group ID	Trunk.1	Select
Lacp	Enable	
Work Ports	2	

Port.03 Port.05	<<Add Remove>>	Port.01 Port.02 Port.04 Port.06 Port.07 Port.08 Port.09 Port.10 Port.11
--------------------	-------------------	---

Apply	Delete	Help
-------	--------	------

Notice: The trunk function do not support GVRP and X-Ring.

Switch 1 configuration interface

Port Trunk - Aggregator Information

Aggregator Setting
Aggregator Information
State Activity

Group 1					
Actor			Partner		
Priority	1		1		
MAC	0060A7123456		0060A7234567		
PortNo	Key	Priority	Active	PortNo	Key
3	513	1	selected	8	513 1
5	513	1	selected	7	513 1

Static Trunking Group	
Group Key	2
Port Member	Port.01 Port.02

Aggregation Information of Switch 1

Click on the tab of **Aggregator Information** to check the trunked group information as the illustration shown above after the two switches configured

Switch 2 configuration

Port Trunk - Aggregator Setting

Notice: The trunk function do not support GVRP and X-Ring.
Switch 2 configuration interface

5. Set **System Priority** of the trunk group. The default is 1.
6. Select a **trunk group ID** by pull down the drop-down menu bar.
7. Enable LACP.
8. Include the member ports by clicking the **Add** button after selecting the port number and the column field of **Work Ports** changes automatically.

Port Trunk - Aggregator Information

Group1						
Actor			Partner			
Priority	1		1			
MAC	0060A7123456		0060A7234567			
PortNo	Key	Priority	Active	PortNo	Key	Priority
7	513	1	selected	5	513	1
8	513	1	selected	3	513	1

Aggregation Information of Switch 2

Click on the tab of **Aggregator Information** to check the trunked group information as the illustration shown above after the two switches configured

State Activity

Having set up the LACP aggregator on the tab of Aggregator Setting, you can configure the state activity for the members of the LACP trunk group. You can tick or cancel the checkbox beside the state display. When you remove the tick mark to the port and click **Apply**, the port state activity will change to **Passive**.

- **Active:** The port automatically sends LACP protocol packets
- **Passive:** The port does not automatically send LACP protocol packets, and responds only if it receives LACP protocol packets from the opposite device group

A link having either two active LACP nodes or one active node can perform dynamic LACP trunk.

A link having two passive LACP nodes will not perform dynamic LACP trunk because both ports are waiting for an LACP protocol packet from the opposite device

Port Trunk - State Activity

Aggregator Setting
Aggregator Information
State Activity

Port	LACP State	Activity	Port	LACP State	Activity
1		N/A	2		N/A
3	<input checked="" type="checkbox"/>	Active	4		N/A
5	<input checked="" type="checkbox"/>	Active	6		N/A
7		N/A	8		N/A
9		N/A	10		N/A
7		N/A	8		N/A
9		N/A	10		N/A
11		N/A	12		N/A
13		N/A	14		N/A
15		N/A	16		N/A
17		N/A	18		N/A

Apply
Help

Port Trunk – State Activity interface

Port Mirroring

The Port mirroring is a method for monitoring traffic in switched networks. Traffic through ports can be monitored by one specific port. That means traffic goes in or out monitored (source) ports will be duplicated into mirror (destination) port.

- **Destination Port:** There is only one port can be selected to be destination (mirror) port for monitoring both RX and TX traffic which come from source port. Or, use one of two ports for monitoring RX traffic only and the other one for TX traffic only. User can connect mirror port to LAN analyzer or Netxray
- **Source Port:** The ports that user wants to monitor. All monitored port traffic will be copied to mirror (destination) port. User can select multiple source ports by checking the **RX** or **TX** check boxes to be monitored
- And then, click Apply button

Port Mirroring

	Destination Port		Source Port	
	RX	TX	RX	TX
Port.01	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.02	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.03	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.04	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.05	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.06	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.07	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.08	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.09	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.10	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.11	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.12	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.13	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.14	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.15	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.16	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.17	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>
Port.18	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>	<input type="checkbox"/>

Port Trunk – Port Mirroring interface

Rate Limiting

You can set up every port's bandwidth rate and frame limitation type.

- **Ingress Limit Frame type:** Select the frame type that you want to filter. The frame types have 4 options for selecting: **All**, **Broadcast/Multicast/Flooded Unicast**, **Broadcast/Multicast** and **Broadcast only**

Broadcast/Multicast/Flooded Unicast, **Broadcast/Multicast** and **Broadcast only** types are only for ingress frames. The egress rate only supports the type of '**All**'.

- All the ports support port ingress and egress rate control. For example, assume port 1 is 10Mbps, users can set it's effective egress rate as 1Mbps, ingress rate as 500Kbps. The switch performs the ingress rate by packet counter to meet the specified rate
 - **Ingress:** Enter the port effective ingress rate (The default value is "0")
 - **Egress:** Enter the port effective egress rate (The default value is "0")
- And then, click to apply the settings

Rate Limiting

	Ingress Limit Frame Type	Ingress	Egress
Port.01	All	0 kbps	0 kbps
Port.02	All	0 kbps	0 kbps
Port.03	All	0 kbps	0 kbps
Port.04	All	0 kbps	0 kbps
Port.05	All	0 kbps	0 kbps
Port.06	All	0 kbps	0 kbps
Port.07	All	0 kbps	0 kbps
Port.08	All	0 kbps	0 kbps
Port.09	All	0 kbps	0 kbps
Port.10	All	0 kbps	0 kbps
Port.11	All	0 kbps	0 kbps
Port.12	All	0 kbps	0 kbps
Port.13	All	0 kbps	0 kbps
Port.14	All	0 kbps	0 kbps
Port.15	All	0 kbps	0 kbps
Port.16	All	0 kbps	0 kbps
Port.17	All	0 kbps	0 kbps
Port.18	All	0 kbps	0 kbps

Rate Range is from 100 kbps to 102400 kbps or to 256000 kbps for giga ports, and zero means no limit.

Rate Limiting interface

VLAN configuration

A Virtual LAN (VLAN) is a logical network grouping that limits the broadcast domain, which would allow you to isolate network traffic, so only the members of the VLAN will receive traffic from the same VLAN members. Basically, creating a VLAN from a switch is logically equivalent to reconnecting a group of network devices to another Layer 2 switch. However, all the network devices are still plugged into the same switch physically.

The industrial switch supports port-based and 802.1Q (tagged-based) VLAN. The default configuration of VLAN operation mode is **“Disable”**.

VLAN Configuration

VLAN Operation Mode : Disable ▼

Enable GVRP Protocol

Management Vlan ID : Apply

VLAN NOT ENABLE

VLAN Configuration interface

VLAN configuration—Port-based VLAN

A port-based VLAN basically consists of its members—ports, which means the VLAN is created by grouping the selected ports. This method provides the convenience for users to configure a simple VLAN easily without complicated steps. Packets can go among only members of the same VLAN group. Note all unselected ports are treated as belonging to another single VLAN. If the port-based VLAN enabled, the VLAN-tagging is ignored. The port-based VLAN function allows the user to create separate VLANs to limit the unnecessary packet flooding; however, for the purpose of sharing resource, a single port called a common port can belongs to different VLANs, which all the member devices (ports) in different VLANs have the permission to access the common port while they still cannot communicate with each other in different VLANs.

VLAN Configuration

VLAN Operation Mode : Port Based ▾
 Enable GVRP Protocol
 Management Vlan ID :




VLAN – Port Based interface

- Pull down the selection item and focus on **Port Based** then press to set the VLAN Operation Mode in **Port Based** mode
- Click to add a new VLAN group (The maximum VLAN groups are up to 64)


VLAN Configuration

VLAN Operation Mode : Port Based ▾
 Enable GVRP Protocol
 Management Vlan ID :


Group Name	<input type="text" value="V_LAN1"/>	
VLAN ID	<input type="text" value="79"/>	
Port.05 ▲ Port.06 Port.07 Port.08 Port.09 Port.10 Port.11 Port.12 Port.13 Port.14 Port.15 Port.16 ▼	<input type="button" value="Add"/> <input type="button" value="Remove"/>	Port.01 Port.02 Port.03 Port.04

- Enter the group name and VLAN ID. Add the selected port number into the right field to group these members to be a VLAN group, or remove any of them listed in the right field from the VLAN
- And then, click  to have the configuration take effect
- You will see the VLAN list displays



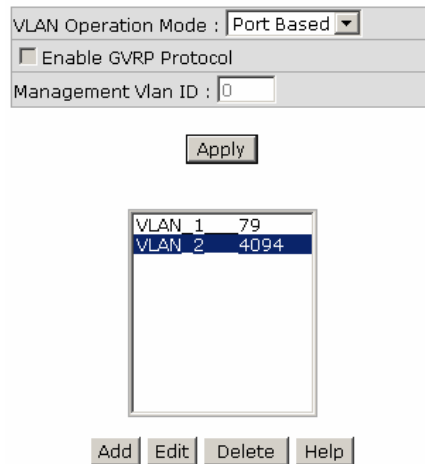

VLAN Configuration





VLAN Operation Mode :	Port Based
<input type="checkbox"/> Enable GVRP Protocol	
Management Vlan ID :	0



VLAN 1	79
VLAN 2	4094

VLAN—Port Based Edit/Delete interface

- Use  to delete the VLAN
- Use  to modify group name, VLAN ID, or add/remove the members of the existing VLAN group

Remember to execute the 'Save Configuration' action, otherwise the new configuration will lose when switch power off

802.1Q VLAN

Virtual Local Area Network (VLAN) can be implemented on the switch to logically create different broadcast domain.

When the 802.1Q VLAN function is enabled, all ports on the switch belong to default VLAN of VID 1, which means they logically are regarded as members of the same broadcast domain. The valid VLAN ID is in the range of number between 1 and 4094. The amount of VLAN groups is up to 256 including default VLAN that cannot be deleted.

Each member port of 802.1Q is on either an Access Link (VLAN-tagged) or a Trunk Link (no VLAN-tagged). All frames on an Access Link carry no VLAN identification. Conversely, all frames on a Trunk Link are VLAN-tagged. Besides, there is the third mode—Hybrid. A Hybrid Link can carry both VLAN-tagged frames and untagged frames. A single port is supposed to belong to one VLAN group, except it is on a Trunk/Hybrid Link.

The technique of 802.1Q tagging inserts a 4-byte tag, including VLAN ID of the destination port—PVID, in the frame. With the combination of Access/Trunk/Hybrid Links, the communication across switches also can make the packet sent through tagged and untagged ports.

802.1Q Configuration

- Pull down the selection item and focus on **802.1Q** then press to set the VLAN Operation Mode in **802.1Q** mode
- **Enable GVRP Protocol:** GVRP (GARP VLAN Registration Protocol) is a protocol that facilitates control of virtual local area networks (VLANs) within a larger network. GVRP conforms to the IEEE 802.1Q specification, which defines a method of tagging frames with VLAN configuration data. This allows network devices to dynamically exchange VLAN configuration information with other devices. For example, having enabled GVRP on two switches, they are able to automatically exchange the information of their VLAN database. Therefore, the user doesn't need to manually configure whether the link is trunk or hybrid, the packets belonging to the same VLAN can communicate across switches. Tick this checkbox to enable GVRP protocol. This checkbox is available while the VLAN Operation Mode is in **802.1Q** mode
- **Management VLAN ID:** Only when the VLAN members, whose Untagged VID (PVID) equals to the value in this column, will have the permission to access the switch. The default value is '0' that means this limit is not enabled (all members in different VLANs can access this switch)
- Select the port you want to configure
- **Link Type:** There are 3 types of link type
 - **Access Link:** A segment which provides the link path for one or more stations to the VLAN-aware device. An Access Port (untagged port), connected to the access link, has an untagged VID (also called PVID). After an untagged frame gets into the access port, the switch will insert a four-byte tag in the frame. The contents of the last 12-bit of the tag is untagged VID. When this frame is sent out through any of the access port of the same PVID, the switch will remove the tag from the frame to recover it to what it was. Those ports of the same untagged VID are regarded as the same VLAN group members
 - **Trunk Link:** A segment which provides the link path for one or more VLAN-aware devices (switches). A Trunk Port, connected to the trunk link, has an understanding of tagged frame, which is used for the communication among VLANs across switches. Which frames of the specified VIDs will be forwarded depends on the values filled in the Tagged VID column field. Please insert a comma between two VIDs

Note:

1. *A trunk port doesn't insert tag into an untagged frame, and therefore the untagged VID column field is not available.*
2. *It's not necessary to type '1' in the tagged VID. The trunk port will forward the frames of VLAN 1.*
3. *The trunk port has to be connected to a trunk/hybrid port of the other switch. Both the tagged VID of the two ports have to be the same.*

- **Hybrid Link:** A segment which consists of Access and Trunk links. The hybrid port has both the features of access and trunk ports. A hybrid port has a PVID belonging to a particular VLAN, and it also forwards the specified tagged-frames for the purpose of VLAN communication across switches

Note:

1. *It's not necessary to type '1' in the tagged VID. The hybrid port will forward the frames of VLAN 1.*

The trunk port has to be connected to a trunk/hybrid port of the other switch. Both the tagged VID of the two ports have to be the same

- **Untagged VID:** This column field is available when Link Type is set as Access Link and Hybrid Link. Assign a number in the range between 1 and 4094
- **Tagged VID:** This column field is available when Link Type is set as Trunk Link and Hybrid Link. Assign a number in the range between 1 and 4094
- Click to have the configuration take effect

- You can see the link type, untagged VID, and tagged VID information of each port in the table below on the screen

VLAN Configuration

VLAN Operation Mode : 802.1Q

Enable GVRP Protocol

Management Vlan ID : 0

Apply

802.1Q Configuration

Group Configuration

Port	Link Type	Untagged Vid	Tagged Vid
Port.01	Access Link	1	

Apply Help

Port	Link Type	Untagged Vid	Tagged Vid
Port.01	Access Link	2	
Port.02	Access Link	3	
Port.03	Trunk Link	1	2, 3,
Port.04	Hybrid Link	4	2, 3,
Port.05	Access Link	7	
Port.06	Access Link	1	
Port.07	Access Link	1	
Port.08	Access Link	1	
Port.09	Access Link	1	
Port.10	Access Link	1	
Port.11	Access Link	1	
Port.12	Access Link	1	
Port.13	Access Link	1	
Port.14	Access Link	1	
Port.15	Access Link	1	
Port.16	Access Link	1	
Port.17	Access Link	1	
Port.18	Access Link	1	

802.1Q VLAN interface

Group Configuration

Edit the existing VLAN Group.

- Select the VLAN group in the table list
- Click

VLAN Configuration

VLAN Operation Mode : 802.1Q

Enable GVRP Protocol

Management Vlan ID : 0

Apply

802.1Q Configuration **Group Configuration**

Default	1
VLAN_2	2
VLAN_3	3
VLAN_4	4
VLAN_7	7

Edit Delete

Group Configuration interface

- You can Change the VLAN group name and VLAN ID

- Click 

VLAN Configuration

VLAN Operation Mode : 802.1Q

Enable GVRP Protocol

Management Vlan ID : 0

Apply

802.1Q Configuration **Group Configuration**

Group Name VLAN_3

VLAN ID 3

Apply

Group Configuration interface

Rapid Spanning Tree

The Rapid Spanning Tree Protocol (RSTP) is an evolution of the Spanning Tree Protocol and provides for faster spanning tree convergence after a topology change. The system also supports STP and the system will auto detect the connected device that is running STP or RSTP protocol.

RSTP - System Configuration

- User can view spanning tree information about the Root Bridge
- User can modify RSTP state. After modification, click button
 - **RSTP mode:** User must enable or disable RSTP function before configure the related parameters
 - **Priority (0-61440):** A value used to identify the root bridge. The bridge with the lowest value has the highest priority and is selected as the root. The value must be a multiple of 4096 according to the protocol standard rule
 - **Max Age (6-40):** The number of seconds a bridge waits without receiving Spanning-tree Protocol configuration messages before attempting a reconfiguration. Enter a value between 6 through 40
 - **Hello Time (1-10):** The time that controls switch sends out the BPDU packet to check RSTP current status. Enter a value between 1 through 10
 - **Forward Delay Time (4-30):** The number of seconds a port waits before changing from its Rapid Spanning-Tree Protocol learning and listening to STP states to the forwarding state. Enter a value between 4 through 30

Follow the rule to configure the MAX Age, Hello Time, and Forward Delay Time.
 $2 \times (\text{Forward Delay Time value} - 1) \geq \text{Max Age value} \geq 2 \times (\text{Hello Time value} + 1)$

RSTP - System Configuration

System Configuration
Port Configuration

RSTP Mode	<input type="text" value="Enable"/>
Priority (0-61440)	<input type="text" value="32768"/>
Max Age (6-40)	<input type="text" value="20"/>
Hello Time (1-10)	<input type="text" value="2"/>
Forward Delay Time (4-30)	<input type="text" value="15"/>

Priority must be a multiple of 4096
 $2 * (\text{Forward Delay Time} - 1)$ should be greater than or equal to the Max Age.
 The Max Age should be greater than or equal to $2 * (\text{Hello Time} + 1)$.

Bridge ID	0080000F380131DD
Root Priority	32768
Root Port	Root
Root Path Cost	0
Max Age	20
Hello Time	2
Forward Delay	15

RSTP System Configuration interface

RSTP - Port Configuration

This web page provides the port configuration interface for RSTP. You can assign higher or lower priority to each port. Rapid spanning tree will have the port with the higher priority in forwarding state and block other ports to make certain that there is no loop in the LAN.

- Select the port in the port column field
- **Path Cost:** The cost of the path to the other bridge from this transmitting bridge at the specified port. Enter a number 1 through 200000000
- **Priority:** Decide which port should be blocked by priority in LAN. Enter a number 0 through 240. The value of priority must be the multiple of 16
- **Admin P2P:** The rapid state transitions possible within RSTP are dependent upon whether the port concerned can only be connected to exactly another bridge (i.e. it is served by a point-to-point LAN segment), or can be connected to two or more bridges (i.e. it is served by a shared medium LAN segment). This function allows the P2P status of the link to be manipulated administratively. True means the port is regarded as a point-to-point link. False means the port is regarded as a shared link. Auto means the link type is determined by the auto-negotiation between the two peers
- **Admin Edge:** The port directly connected to end stations won't create bridging loop in the network. To configure the port as an edge port, set the port to "True" status
- **Admin Non Stp:** The port includes the STP mathematic calculation. **True** is not including STP mathematic calculation. **False** is including the STP mathematic calculation
- Click

RSTP - Port Configuration

System Configuration		Port Configuration			
Port	Path Cost (1-200000000)	Priority (0-240)	Admin P2P	Admin Edge	Admin Non Stp
Port.01					
Port.02					
Port.03	200000	128	Auto	true	false
Port.04					
Port.05					

priority must be a multiple of 16

RSTP Port Status

Port	Path Cost	Port Priority	Oper P2P	Oper Edge	Stp Neighbor	State	Role
Port.01	200000	128	True	True	False	Disabled	Disabled
Port.02	200000	128	True	True	False	Disabled	Disabled
Port.03	200000	128	True	True	False	Disabled	Disabled
Port.04	200000	128	True	True	False	Disabled	Disabled
Port.05	200000	128	True	True	False	Disabled	Disabled
Port.06	200000	128	True	True	False	Disabled	Disabled
Port.07	200000	128	True	True	False	Disabled	Disabled
Port.08	200000	128	True	True	False	Disabled	Disabled
Port.09	200000	128	True	True	False	Disabled	Disabled
Port.10	200000	128	True	True	False	Disabled	Disabled
Port.11	200000	128	True	True	False	Disabled	Disabled
Port.12	200000	128	True	True	False	Disabled	Disabled
Port.13	200000	128	True	True	False	Disabled	Disabled
Port.14	200000	128	True	True	False	Disabled	Disabled
Port.15	200000	128	True	True	False	Forwarding	Designated
Port.16	200000	128	True	True	False	Disabled	Disabled
Port.17	20000	128	True	True	False	Disabled	Disabled
Port.18	20000	128	True	True	False	Disabled	Disabled

RSTP Port Configuration interface

SNMP Configuration

Simple Network Management Protocol (SNMP) is the protocol developed to manage nodes (servers, workstations, routers, switches and hubs etc.) on an IP network. SNMP enables network administrators to manage network performance, find and solve network problems, and plan for network growth. Network management systems learn of problems by receiving traps or change notices from network devices implementing SNMP.


System Configuration


- **Community Strings**

You can define a new community string set or remove unwanted community string.





- **String:** Fill the name of string
- **RO:** Read only. Enables requests accompanied by this string to display MIB-object information
- **RW:** Read write. Enables requests accompanied by this string to display MIB-object information and to set MIB objects

Click 

- To remove the community string, select the community string that you defined before and click . The strings of Public_RO and Private_RW are default strings. You can remove them but after resetting the switch to default, the two strings show up again



Agent Mode: Select the SNMP version that you want to use it. And then click  to switch to the selected SNMP version mode

SNMP - System Configuration


System Configuration	Trap Configuration	SNMPv3 Configuration
Community Strings		
Current Strings :  public__RO private__RW PString1__RO PString2__RW	New Community String :  String : PString3 <input checked="" type="radio"/> RO <input type="radio"/> RW	
Agent Mode		
Current Mode: SNMP v1/v2c only	<input checked="" type="radio"/> SNMP V1/V2C only <input type="radio"/> SNMP V3 only <input type="radio"/> SNMP V1/V2C/V3 	
		
SNMP System Configuration interface		

Trap Configuration

A trap manager is a management station that receives traps, the system alerts generated by the switch. If no trap manager is defined, no traps will issue. Create a trap manager by entering the IP address of the station and a community string. To define management stations as trap manager and enter SNMP community strings and selects the SNMP version.

- **IP Address:** Enter the IP address of trap manager
- **Community:** Enter the community string
- **Trap Version:** Select the SNMP trap version type—v1 or v2c
- Click 
- To remove the community string, select the community string listed in the current managers field and click .

SNMP - Trap Configuration





Trap Managers interface

SNMPV3 Configuration



Configure the SNMP V3 function.

Context Table

Configure SNMP v3 context table. Assign the context name of context table. Click  to add context name. Click  to remove unwanted context name.

User Profile


Configure SNMP v3 user table.


- **User ID:** Set up the user name
- **Authentication Password:** Set up the authentication password
- **Privacy Password:** Set up the private password
- Click  to add context name
- Click  to remove unwanted context name

Group Table

Configure SNMP v3 group table.

- **Security Name (User ID):** Assign the user name that you have set up in user table
- **Group Name:** Set up the group name

- Click  to add context name

- Click  to remove unwanted context name

SNMP - SNMPv3 Configuration

System Configuration
Trap Configuration
SNMPv3 Configuration

Context Table

Context Name :

Apply

Current User Profiles :

(none)

Remove

User Table

New User Profile :

Add

User ID:

Authentication Password:

Privacy Password:

Current Group content :

(none)

Remove

Group Table

New Group Table:

Add

Security Name (User ID):

Group Name:

Current Access Tables :

(none)

Remove

Access Table

New Access Table :

Add

Context Prefix:

Group Name:

Security Level:
 NoAuthNoPriv.
 AuthNoPriv.
 AuthPriv.

Context Match Rule
 Exact
 Prefix

Read View Name:

Write View Name:

Notify View Name:

Current MIBTables :

(none)

Remove

MIBView Table

New MIBView Table :

Add

View Name:

SubOid-Tree:

Type:
 Excluded
 Included

Help

Note:
Any modification of SNMPv3 tables might cause MIB accessing rejection. Please take notice of the causality between the tables before you modify these tables.

SNMP V3 configuration interface

Access Table

Configure SNMP v3 access table.

- **Context Prefix:** Set up the context name
- **Group Name:** Set up the group name
- **Security Level:** Select the access level
- **Context Match Rule:** Select the context match rule
- **Read View Name:** Set up the read view
- **Write View Name:** Set up the write view

- **Notify View Name:** Set up the notify view
- Click to add context name
- Click to remove unwanted context name

MIBview Table

Configure MIB view table.

- **ViewName:** Set up the name
- **Sub-Oid Tree:** Fill the Sub-OID
- **Type:** Select the type – exclude or included
- Click to add context name
- Click to remove unwanted context name

QoS Configuration

Quality of Service (QoS) is the ability to provide different priority to different applications, users or data flows, or to guarantee a certain level of performance to a data flow. QoS guarantees are important if the network capacity is insufficient, especially for real-time streaming multimedia applications such as voice over IP or Video Teleconferencing, since these often require fixed bit rate and are delay sensitive, and in networks where the capacity is a limited resource, for example in cellular data communication. In the absence of network congestion, QoS mechanisms are not required.

QoS Policy and Priority Type

- **Qos Policy:** select the Qos policy rule
 - **Using the 8,4,2,1 weight fair queue scheme:** The switch will follow 8:4:2:1 rate to process priority queue from High to lowest queue. For example, when the system processes, 1 frame of the lowest queue, 2 frames of the low queue, 4 frames of the middle queue, and 8 frames of the high queue will be processed at the same time in accordance with the 8,4,2,1 policy rule
 - **Use the strict priority scheme:** Always higher queue will be process first, except higher queue is empty
- **Priority Type:** there are 5 priority type selections available. Disable means no priority type is selected
- **Port-base:** the port priority will follow the **Port-base** that you have assigned – High, middle, low, or lowest
- Click

QoS Configuration

Qos Policy:

Use an 8,4,2,1 weighted fair queuing scheme
 Use a strict priority scheme
 Priority Type:

Port-based Priority:

Port.01	Port.02	Port.03	Port.04	Port.05	Port.06	Port.07	Port.08
<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>
Port.09	Port.10	Port.11	Port.12	Port.13	Port.14	Port.15	Port.16
<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>
Port.17	Port.18						
<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>						

COS:

Priority	0	1	2	3	4	5	6	7
	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>

TOS:

Priority	0	1	2	3	4	5	6	7
	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>
Priority	8	9	10	11	12	13	14	15
	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>
Priority	16	17	18	19	20	21	22	23
	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>
Priority	24	25	26	27	28	29	30	31
	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>
Priority	32	33	34	35	36	37	38	39
	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>
Priority	40	41	42	43	44	45	46	47
	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>
Priority	48	49	50	51	52	53	54	55
	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>
Priority	56	57	58	59	60	61	62	63
	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>	<input type="text" value="Lowest"/>

QoS Configuration interface

Port Base Priority

Configure the priority level for each port. With the drop-down selection item of **Priority Type** above being selected as Port-based, this control item will then be available to set the queuing policy for each port.

- **Port x:** Each port has 4 priority levels—High, Middle, Low, and Lowest—to be chosen

- Click

COS Configuration

Set up the COS priority level. With the drop-down selection item of **Priority Type** above being selected as COS only/COS first, this control item will then be available to set the queuing policy for each port.

- **COS priority:** Set up the COS priority level 0~7 with 4 egress queues: High, Middle, Low, Lowest

- Click

TOS Configuration

Set up the TOS priority. With the drop-down selection item of **Priority Type** above being selected as TOS only/TOS first, this control item will then be available to set the queuing policy for each port.

- **TOS priority:** the system provides 0~63 TOS priority level. Each level has 4 types of priority (egress queues) – high, middle, low, and lowest. The default value is “Lowest” priority for each level. When the IP packet is received, the system will check the TOS level value in the IP packet that has received. For example, user set the TOS level 25 as high, the system will check the TOS value of the received IP packet. If the TOS value of received IP packet is 25(priority = high), and then the packet priority will have highest priority
- Click

IGMP Configuration

The Internet Group Management Protocol (IGMP) is an internal protocol of the Internet Protocol (IP) suite. IP manages multicast traffic by using switches, routers, and hosts that support IGMP. Enabling IGMP allows the ports to detect IGMP queries and report packets and manage IP multicast traffic through the switch. IGMP have three fundamental types of message as follows:

Message	Description
Query	A message sent from the querier (IGMP router or switch) asking for a response from each host belonging to the multicast group.
Report	A message sent by a host to the querier to indicate that the host wants to be or is a member of a given group indicated in the report message.
Leave Group	A message sent by a host to the querier to indicate that the host has quit being a member of a specific multicast group.

The switch supports IP multicast. You can enable IGMP protocol via setting IGMP configuration page to see the IGMP snooping information. IP multicast addresses are in the range of 224.0.0.0 through 239.255.255.255.

- **IGMP Protocol:** Enable or disable the IGMP protocol
- **IGMP Query:** enable or disable the IGMP query function. The IGMP query information will be displayed in IGMP status section
- Click

IGMP Configuration

IP Address	VLAN ID	Member Port
239.255.255.253	1	***4***
224.000.000.251	1	***4***
239.255.255.250	1	***4***

IGMP Snooping:

IGMP Query:

IGMP Configuration interface

M-Ring

M-Ring provides a faster redundant recovery than Spanning Tree topology. The action is similar to STP or RSTP, but the algorithms between them are not the same. In the M-Ring topology, every switch should be enabled with M-Ring function and two ports should be assigned as the member ports in the ring. Only one switch in the M-Ring group would be set as the master switch that one of its two member ports would be blocked, called backup port, and another port is called working port. Other switches in the M-Ring group are called working switches and their two member ports are called working ports. When the failure of network connection occurs, the backup port of the master switch (Ring Master) will automatically become a working port to recover from the failure.

The switch supports the function and interface for setting the switch as the ring master or not. The ring master can negotiate and place command to other switches in the M-Ring group. If there are 2 or more switches in master mode, the software will select the switch with lowest MAC address number as the ring master. The M-Ring master ring mode can be enabled by setting the M-Ring configuration interface. Also, the user can identify whether the switch is the ring master by checking the R.M. LED indicator on the panel of the switch.

The system also supports the **Couple Ring** that can connect 2 or more M-Ring group for the redundant backup function; **Dual Homing** function that can prevent connection lose between M-Ring group and upper level/core switch. Apart from the advantages, **Dual Ring** can handle 2 rings in the system and has the ability to recover from failure within 20 milliseconds.

- **Enable Ring:** To enable the M-Ring function, tick the checkbox beside the **Enable Ring** string label. If this checkbox is not ticked, all the ring functions are unavailable
 - **Enable Ring Master:** Tick the checkbox to enable this switch to be the ring master
 - **1st & 2nd Ring Ports:** Pull down the selection menu to assign the ports as the member ports. **1st Ring Port** is the working port and **2nd Ring Port** is the backup port. When **1st Ring Port** fails, the system will automatically upgrade the **2nd Ring Port** to be the working port
- **Enable Couple Ring:** To enable the couple ring function, tick the checkbox beside the

Enable Couple Ring string label

- **Couple Port:** Assign the member port which is connected to the other ring group
- **Control Port:** When the **Enable Couple Ring** checkbox is ticked, you have to assign the control port to form a couple-ring group between the two M-rings
- **Enable Dual Homing:** Set up one of the ports on the switch to be the Dual Homing port. For a switch, there is only one Dual Homing port. Dual Homing function works only when the M-Ring function enabled
- **Enable Central Ring:** When this check box is ticked, the '**Enable Ring Master**' check box will then also be enabled by the system, which means this equipment is assigned as the Ring Master. The Central Ring differs from the Couple Ring because it only needs a unit to form a redundant linking system of two rings
- And then, click to apply the configuration

M-Ring Configuration

<input checked="" type="checkbox"/>	Enable Ring		
<input type="checkbox"/>	Enable Ring Master		
	1st Ring Port	Port.01 ▾	LINKDOWN
	2nd Ring Port	Port.02 ▾	LINKDOWN
<input type="checkbox"/>	Enable Couple Ring		
	Couple Port	Port.03 ▾	LINKDOWN
	Control Port	Port.04 ▾	LINKDOWN
<input type="checkbox"/>	Enable Dual Homing		
	Homing Port	Port.05 ▾	LINKDOWN
<input type="checkbox"/>	Enable Central Ring 1		
	1st Ring Port	Port.09 ▾	LINKDOWN
	2nd Ring Port	Port.10 ▾	LINKDOWN
<input type="checkbox"/>	Enable Central Ring 2		
	1st Ring Port	Port.11 ▾	LINKDOWN
	2nd Ring Port	Port.12 ▾	LINKDOWN
<input type="checkbox"/>	Enable Central Ring 3		
	1st Ring Port	Port.13 ▾	LINKDOWN
	2nd Ring Port	Port.14 ▾	LINKDOWN
<input type="checkbox"/>	Enable Central Ring 4		
	1st Ring Port	Port.15 ▾	LINKDOWN
	2nd Ring Port	Port.16 ▾	FORWARDING

M-ring Interface

When the M-Ring function enable, user must disable the RSTP. The M-Ring function and RSTP function cannot exist in a switch at the same time.

Remember to execute the 'Save Configuration' action, otherwise the new configuration will lose when switch power off.

LLDP Configuration

Link Layer Discovery Protocol (LLDP) is defined in the IEEE 802.1AB, it is an emerging standard which provides a solution for the configuration issues caused by expanding LANs. LLDP specifically defines a standard method for Ethernet network devices such as switches, routers and wireless LAN access points to advertise information about themselves to other nodes on the network and store the information they discover. LLDP runs on all 802 media. The protocol runs over the data-link layer only, allowing two systems running different network layer protocols to learn about each other.

- **LLDP Protocol:** Pull down the selection menu to disable or enable LLDP function
- **LLDP Interval:** Set the interval of advertising the switch's information to other nodes
- Click

LLDP Configuration

LLDP Protocol:

LLDP Interval: sec

LLDP Interface

Security

In this section, you can configure 802.1x and MAC address table.

802.1X/Radius Configuration

802.1x is an IEEE authentication specification which prevents the client from accessing a wireless access point or wired switch until it provides authority, like the user name and password that are verified by an authentication server (such as RADIUS server).

System Configuration

After enabling the IEEE 802.1X function, you can configure the parameters of this function.

- **IEEE 802.1x Protocol:** Enable or disable 802.1x protocol
- **Radius Server IP:** Set the Radius Server IP address
- **Server Port:** Set the UDP destination port for authentication requests to the specified Radius Server
- **Accounting Port:** Set the UDP destination port for accounting requests to the specified Radius Server
- **Shared Key:** Set an encryption key for using during authentication sessions with the specified radius server. This key must match the encryption key used on the Radius Server
- **NAS, Identifier:** Set the identifier for the radius client
- Click

802.1x/Radius - System Configuration

System Configuration | Port Configuration | Misc Configuration


802.1x Protocol	Enable
Radius Server IP	192.168.16.237
Server Port	1812
Accounting Port	1813
Shared Key	12345678
NAS, Identifier	NAS_L2_SWITCH

Apply Help

802.1x System Configuration interface

802.1x Port Configuration

You can configure 802.1x authentication state for each port. The State provides Disable, Accept, Reject and Authorize.

- **Reject:** The specified port is required to be held in the unauthorized state
- **Accept:** The specified port is required to be held in the Authorized state
- **Authorized:** The specified port is set to the Authorized or Unauthorized state in accordance with the outcome of an authentication exchange between the Supplicant and the authentication server
- **Disable:** When disabled, the specified port works without complying with 802.1x protocol
- Click 

802.1x/Radius - Port Configuration

System Configuration | **Port Configuration** | Misc Configuration

Port	State
Port.01	Authorize
Port.02	Reject
Port.03	Accept
Port.04	Authorize
Port.05	Disable

Apply Help

Port Authorization

Port	State
Port.01	Disable
Port.02	Disable
Port.03	Disable
Port.04	Disable
Port.05	Disable
Port.06	Disable
Port.07	Disable
Port.08	Disable
Port.09	Disable
Port.10	Disable
Port.11	Disable
Port.12	Disable
Port.13	Disable
Port.14	Disable
Port.15	Disable
Port.16	Disable
Port.17	Disable
Port.18	Disable

802.1x Per Port Setting interface

Misc Configuration

- **Quiet Period:** Set the period during which the port doesn't try to acquire a supplicant
- **Tx Period:** Set the period the port wait for retransmit next EAPOL PDU during an authentication session
- **Supplicant Timeout:** Set the period of time the switch waits for a supplicant response to an EAP request
- **Server Timeout:** Set the period of time the switch waits for a server response to an authentication request
- **Max Requests:** Set the number of authentication that must time-out before authentication fails and the authentication session ends
- **Reauth period:** Set the period of time after which clients connected must be re-authenticated
- Click

802.1x/Radius - Misc Configuration

System Configuration	Port Configuration	Misc Configuration												
<table border="1"><tr><td>Quiet Period</td><td><input type="text" value="60"/></td></tr><tr><td>Tx Period</td><td><input type="text" value="30"/></td></tr><tr><td>Supplicant Timeout</td><td><input type="text" value="30"/></td></tr><tr><td>Server Timeout</td><td><input type="text" value="30"/></td></tr><tr><td>Max Requests</td><td><input type="text" value="2"/></td></tr><tr><td>Reauth Period</td><td><input type="text" value="3600"/></td></tr></table>			Quiet Period	<input type="text" value="60"/>	Tx Period	<input type="text" value="30"/>	Supplicant Timeout	<input type="text" value="30"/>	Server Timeout	<input type="text" value="30"/>	Max Requests	<input type="text" value="2"/>	Reauth Period	<input type="text" value="3600"/>
Quiet Period	<input type="text" value="60"/>													
Tx Period	<input type="text" value="30"/>													
Supplicant Timeout	<input type="text" value="30"/>													
Server Timeout	<input type="text" value="30"/>													
Max Requests	<input type="text" value="2"/>													
Reauth Period	<input type="text" value="3600"/>													
<input type="button" value="Apply"/> <input type="button" value="Help"/>														

802.1x Misc Configuration interface

MAC Address Table

Use the MAC address table to ensure the port security.

Static MAC Address

You can add a static MAC address; it remains in the switch's address table, regardless of whether the device is physically connected to the switch. This saves the switch from having to re-learn a device's MAC address when the disconnected or powered-off device is active on the network again. You can add / modify / delete a static MAC address.

Add the Static MAC Address

You can add static MAC address in the switch MAC table here.

- **MAC Address:** Enter the MAC address of the port that should permanently forward traffic, regardless of the device network activity
- **Port No.:** Pull down the selection menu to select the port number

- Click
- If you want to delete the MAC address from filtering table, select the MAC address and click

MAC Address Table - Static MAC Addresses

Static MAC Addresses	MAC Filtering	All Mac Addresses	Multicast Filtering				
<table border="1"> <tr> <td>AABBCCDDEEFF</td> <td>Port.01</td> </tr> <tr> <td>FFEEDDCBBAA</td> <td>Port.01</td> </tr> </table>				AABBCCDDEEFF	Port.01	FFEEDDCBBAA	Port.01
AABBCCDDEEFF	Port.01						
FFEEDDCBBAA	Port.01						
<table border="1"> <tr> <td>MAC Address</td> <td><input type="text" value="0060A7123456"/></td> </tr> <tr> <td>Port No.</td> <td><input type="text" value="Port.01"/></td> </tr> </table>				MAC Address	<input type="text" value="0060A7123456"/>	Port No.	<input type="text" value="Port.01"/>
MAC Address	<input type="text" value="0060A7123456"/>						
Port No.	<input type="text" value="Port.01"/>						
<input type="button" value="Add"/> <input type="button" value="Delete"/> <input type="button" value="Help"/>							

Static MAC Addresses interface

MAC Filtering

By filtering MAC address, the switch can easily filter the pre-configured MAC address and reduce the un-safety. You can add and delete filtering MAC address.

MAC Address Table - MAC Filtering

Static MAC Addresses	MAC Filtering	All Mac Addresses	Multicast Filtering		
<table border="1"> <tr> <td>1A2B3C4D5E6F</td> </tr> <tr> <td>A1B2C3D4E5F6</td> </tr> </table>				1A2B3C4D5E6F	A1B2C3D4E5F6
1A2B3C4D5E6F					
A1B2C3D4E5F6					
<table border="1"> <tr> <td>MAC Address</td> <td><input type="text" value="6e4c5a3b2d1f"/></td> </tr> </table>				MAC Address	<input type="text" value="6e4c5a3b2d1f"/>
MAC Address	<input type="text" value="6e4c5a3b2d1f"/>				
<input type="button" value="Add"/> <input type="button" value="Delete"/> <input type="button" value="Help"/>					

MAC Filtering interface

- **MAC Address:** Enter the MAC address that you want to filter
- Click
- If you want to delete the MAC address from the filtering table, select the MAC address and click

All MAC Addresses

You can view all of the MAC addresses learned by the selected port.

- Select the port number
- The selected port of static & dynamic MAC address information will be displayed in here
- Click to clear the dynamic MAC addresses information of the current port shown on the screen

MAC Address Table - All Mac Addresses

The screenshot shows a web interface for viewing MAC addresses. At the top, there are four tabs: "Static MAC Addresses", "MAC Filtering", "All Mac Addresses" (which is selected), and "Multicast Filtering". Below the tabs is a "Port No:" dropdown menu set to "Port.02". The main area contains a table with three rows of static MAC addresses:

112244335566	STATIC
334455662211	STATIC
FFE3D2CC213F	STATIC

Below the table, it displays "Dynamic Address Count:0" and "Static Address Count:3". At the bottom of the interface is a "Clear MAC Table" button.

All MAC Address interface

MAC Address Table—Multicast Filtering

Multicasts are similar to broadcasts, they are sent to all end stations on a LAN or VLAN. Multicast filtering is the function, which end stations can receive the multicast traffic if the connected ports had been included in the specific multicast groups. With multicast filtering, network devices only forward multicast traffic to the ports that are connected to the registered end stations.

- **IP Address:** Assign a multicast group IP address in the range of 224.0.0.0 ~ 239.255.255.255
- **Member Ports:** Tick the check box beside the port number to include them as the member ports in the specific multicast group IP address
- Click to append a new filter of multicast to the field, or select the filter in the field and click to remove it

MAC Address Table - Multicast Filtering

Static MAC Addresses
MAC Filtering
All Mac Addresses
Multicast Filtering

```

224.000.000.100_12*****
224.000.001.100_**34*****
224.000.002.100_****56*****
                
```

IP Address	<input type="text" value="224.0.3.100"/>
Member Ports	<input type="checkbox"/> Port.01 <input type="checkbox"/> Port.02 <input type="checkbox"/> Port.03 <input type="checkbox"/> Port.04 <input type="checkbox"/> Port.05 <input type="checkbox"/> Port.06 <input checked="" type="checkbox"/> Port.07 <input checked="" type="checkbox"/> Port.08
	<input type="checkbox"/> Port.09 <input type="checkbox"/> Port.10 <input type="checkbox"/> Port.11 <input type="checkbox"/> Port.12 <input type="checkbox"/> Port.13 <input type="checkbox"/> Port.14 <input type="checkbox"/> Port.15 <input type="checkbox"/> Port.16 <input type="checkbox"/> Port.17 <input type="checkbox"/> Port.18

Add Delete Help

Multicast Filtering interface

Factory Default

Reset switch to default configuration. Click Reset to reset all configurations to the default value.

Factory Default

Keep current IP address setting?
 Keep current username & password?

Reset Help

Factory Default interface

Save Configuration

Save all configurations that you have made in the system. To ensure the all configuration will be saved. Click Save Flash to save the all configuration to the flash memory.

Save Configuration

Save Help

Save Configuration interface

System Reboot

Reboot the switch in software reset. Click Reboot to reboot the system.

System Reboot

Please click **[Reboot]** button to restart switch device.

Reboot

System Reboot interface

Trouble shooting

- Verify that is using the right power cord/adapter (DC 12-48V), please don't use the power adapter with DC output higher than 48V, or it will burn this converter down
- Select the proper UTP cable to construct user network. Please check that is using the right cable. use unshielded twisted-pair (UTP) or shield twisted-pair (STP) cable for RJ-45 connections: 100 Category 3, 4 or 5 cable for 10Mbps connections, 100 Category 5 cable for 100Mbps connections, or 100 Category 5e/6 cable for 1000Mbps connections. Also be sure that the length of any twisted-pair connection does not exceed 100 meters (328 feet)
- **Diagnosing LED Indicators:** To assist in identifying problems, the switch can be easily monitored through panel indicators, which describe common problems the user may encounter and where the user can find possible solutions
- If the power indicator does not light on when the power cord is plugged in, you may have a problem with power cord. Then check for loose power connections, power losses or surges at power outlet. If you still cannot resolve the problem, contact the local dealer for assistance
- If the Industrial switch LED indicators are normal and the connected cables are correct but the packets still cannot transmit. Please check user system's Ethernet devices' configuration or status

Appendix A – RJ-45 Pin Assignment

RJ-45 Pin Assignments

The UTP/STP ports will automatically sense for Fast Ethernet (10Base-T/100Base-TX connections), or Gigabit Ethernet (10Base-T/100Base-TX/1000Base-T connections). Auto MDI/MDIX means that the switch can connect to another switch or workstation without changing straight through or crossover cabling. See the figures below for straight through and crossover cable schematic.

10 /100BASE-TX Pin outs

With 10/100BASE-TX cable, pins 1 and 2 are used for transmitting data, and pins 3 and 6 for receiving data.

- **RJ-45 Pin Assignments**


Pin Number	Assignment
1	Tx+
2	Tx-
3	Rx+
6	Rx-

“+” and “-” signs represent the polarity of the wires that make up each wire pair. The table below shows the 10 / 100BASE-TX MDI and MDI-X port pin outs.


Pin MDI-X	Signal Name	MDI Signal Name
1	Receive Data plus (RD+)	Transmit Data plus (TD+)
2	Receive Data minus (RD-)	Transmit Data minus (TD-)
3	Transmit Data plus (TD+)	Receive Data plus (RD+)
6	Transmit Data minus (TD-)	Receive Data minus (RD-)

10/100Base-TX Cable Schematic

The following two figures show the 10/100Base-TX cable schematic

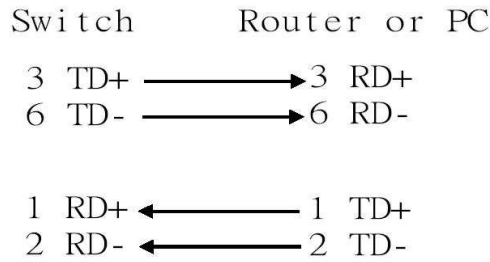


Straight-through cable schematic

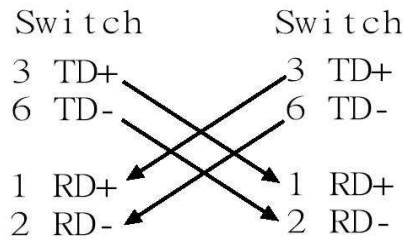


Cross over cable schematic

10/100/1000Base-TX Pin outs


The following figure shows the 10/100/1000 Ethernet RJ-45 pin outs.

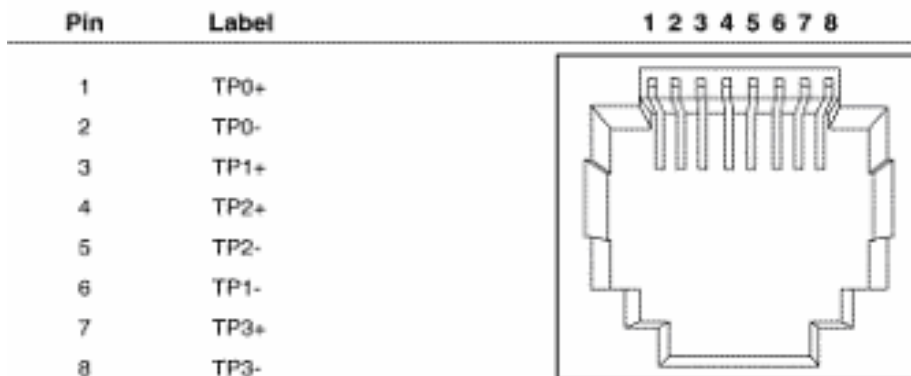

10/100/1000Base-TX Cable Schematic

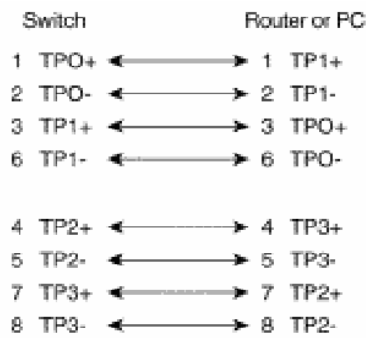

Straight through cables schematic

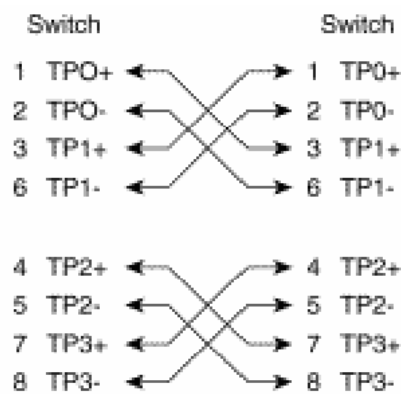

Cross over cables schematic

Appendix B – Command Sets

- User EXEC **E**
- Privileged EXEC **P**
- Global configuration **G**
- VLAN database **V**
- Interface configuration **I**

System Commands Set

Netstar Commands	Level	Description	Example
show config	E	Show switch configuration	switch> show config
show terminal	P	Show console information	switch# show terminal
write memory	P	Save user configuration into permanent memory (flash rom)	switch# write memory
system name [System Name]	G	Configure system name	switch(config)# system name xxx

Netstar Commands	Level	Description	Example
system location [System Location]	G	Set switch system location string	switch(config)# system location xxx
system description [System Description]	G	Set switch system description string	switch(config)# system description xxx
system contact [System Contact]	G	Set switch system contact window string	switch(config)# system contact xxx
show system-info	E	Show system information	switch> show system-info
ip address [Ip-address] [Subnet-mask] [Gateway]	G	Configure the IP address of switch	switch(config)# ip address 192.168.16.1 255.255.255.0 192.168.16.254
ip dhcp	G	Enable DHCP client function of switch	switch(config)# ip dhcp
show ip	P	Show IP information of switch	switch# show ip
no ip dhcp	G	Disable DHCP client function of switch	switch(config)# no ip dhcp
reload	G	Halt and perform a cold restart	switch(config)# reload
default	G	Restore to default	switch(config)# default
admin username [Username]	G	Changes a login username. (maximum 10 words)	switch(config)# admin username xxxxxx
admin password [Password]	G	Specifies a password (maximum 10 words)	switch(config)# admin password xxxxxx
show admin	P	Show administrator information	switch# show admin
dhcpserver enable	G	Enable DHCP Server	switch(config)# dhcpserver enable
Dhcpserver disable	G	Disable DHCP Server	switch(config)# no dhcpserver
dhcpserver lowip [Low IP]	G	Configure low IP address for IP pool	switch(config)# dhcpserver lowip 192.168.1.100
dhcpserver highip [High IP]	G	Configure high IP address for IP pool	switch(config)# dhcpserver highip 192.168.1.200
dhcpserver subnetmask [Subnet mask]	G	Configure subnet mask for DHCP clients	switch(config)# dhcpserver subnetmask 255.255.255.0
dhcpserver gateway [Gateway]	G	Configure gateway for DHCP clients	switch(config)# dhcpserver gateway 192.168.1.254
dhcpserver dnsip [DNS IP]	G	Configure DNS IP for DHCP clients	switch(config)# dhcpserver dnsip 192.168.1.1
dhcpserver leasetime [Hours]	G	Configure lease time (in hour)	switch(config)# dhcpserver leasetime 1
dhcpserver ipbinding [IP address]	I	Set static IP for DHCP clients by port	switch(config)# interface fastEthernet 2 switch(config)# dhcpserver ipbinding 192.168.1.1
show dhcpserver configuration	P	Show configuration of DHCP server	switch# show dhcpserver configuration
show dhcpserver clients	P	Show client entries of DHCP server	switch# show dhcpserver clients
show dhcpserver ip-binding	P	Show IP-Binding information of DHCP server	switch# show dhcpserver ip-binding
no dhcpserver	G	Disable DHCP server function	switch(config)# no dhcpserver
security enable	G	Enable IP security function	switch(config)# security enable

Netstar Commands	Level	Description	Example
security http	G	Enable IP security of HTTP server	switch(config)# security http
security telnet	G	Enable IP security of telnet server	switch(config)# security telnet
security ip [Index(1..10)] [IP Address]	G	Set the IP security list	switch(config)# security ip 1 192.168.1.55
show security	P	Show the information of IP security	switch# show security
no security	G	Disable IP security function	switch(config)# no security
no security http	G	Disable IP security of HTTP server	switch(config)# no security http
no security telnet	G	Disable IP security of telnet server	switch(config)# no security telnet

Port Commands Set

Netstar Commands	Level	Description	Example
interface fastEthernet [Portid]	G	Choose the port for modification.	switch(config)# interface fastEthernet 2
duplex [full half]	I	Use the duplex configuration command to specify the duplex mode of operation for Fast Ethernet.	switch(config)# interface fastEthernet 2 switch(config-if)# duplex full
speed [10 100 1000 auto]	I	Use the speed configuration command to specify the speed mode of operation for Fast Ethernet., the speed can't be set to 1000 if the port isn't a giga port..	switch(config)# interface fastEthernet 2 switch(config-if)# speed 100
no flowcontrol	I	Disable flow control of interface	switch(config-if)# no flowcontrol
security enable	I	Enable security of interface	switch(config)# interface fastEthernet 2 switch(config-if)# security enable
no security	I	Disable security of interface	switch(config)# interface fastEthernet 2 switch(config-if)# no security
bandwidth type all	I	Set interface ingress limit frame type to 'accept all frame'	switch(config)# interface fastEthernet 2 switch(config-if)# bandwidth type all
bandwidth type broadcast-multicast-flooded-unicast	I	Set interface ingress limit frame type to 'accept broadcast, multicast, and flooded unicast frame'	switch(config)# interface fastEthernet 2 switch(config-if)# bandwidth type broadcast-multicast-flooded-unicast
bandwidth type broadcast-multicast	I	Set interface ingress limit frame type to 'accept broadcast and multicast frame'	switch(config)# interface fastEthernet 2 switch(config-if)# bandwidth type broadcast-multicast
bandwidth type broadcast-only	I	Set interface ingress limit frame type to 'only accept broadcast frame'	switch(config)# interface fastEthernet 2 switch(config-if)# bandwidth type broadcast-only

Netstar Commands	Level	Description	Example
bandwidth in [Value]	I	Set interface input bandwidth. Rate Range is from 100 kbps to 102400 kbps or to 256000 kbps for giga ports, and zero means no limit.	switch(config)# interface fastEthernet 2 switch(config-if)# bandwidth in 100
bandwidth out [Value]		Set interface output bandwidth. Rate Range is from 100 kbps to 102400 kbps or to 256000 kbps for giga ports, and zero means no limit.	switch(config)# interface fastEthernet 2 switch(config-if)# bandwidth out 100
show bandwidth	I	Show interfaces bandwidth control	switch(config)# interface fastEthernet 2 switch(config-if)# show bandwidth
state [Enable Disable]	I	Use the state interface configuration command to specify the state mode of operation for Ethernet ports. Use the disable form of this command to disable the port.	switch(config)# interface fastEthernet 2 switch(config-if)# state Disable
show interface configuration	I	show interface configuration status	switch(config)# interface fastEthernet 2 switch(config-if)# show interface configuration
show interface status	I	show interface actual status	switch(config)# interface fastEthernet 2 switch(config-if)# show interface status
show interface accounting	I	show interface statistic counter	switch(config)# interface fastEthernet 2 switch(config-if)# show interface accounting
no accounting	I	Clear interface accounting information	switch(config)# interface fastEthernet 2 switch(config-if)# no accounting

Trunk Commands Set

Netstar Commands	Level	Description	Example
aggregator priority [1~65535]	G	Set port group system priority	switch(config)# aggregator priority 22
aggregator activityport [Group ID] [Port Numbers]	G	Set activity port	switch(config)# aggregator activityport 2
aggregator group [GroupID] [Port-list] lACP workp [Workport]	G	Assign a trunk group with LACP active. [GroupID] :1~4 [Port-list]:Member port list, This parameter could be a port range(ex.1-4) or a port list separate by a comma(ex.2, 3, 6)[Workport]: The amount of work ports, this value could not be less than zero or be large than the amount of member ports.	switch(config)# aggregator group 1 1-4 lACP workp 2 or switch(config)# aggregator group 2 1,4,3 lACP workp 3

Netstar Commands	Level	Description	Example
aggregator group [GroupID] [Port-list] no lacp	G	Assign a static trunk group. [GroupID] :1~4 [Port-list]:Member port list, This parameter could be a port range(ex.1-4) or a port list separate by a comma(ex.2, 3, 6)	switch(config)# aggregator group 1 2-4 no lacp or switch(config)# aggregator group 1 3,1,2 no lacp
show aggregator	P	Show the information of trunk group	switch# show aggregator 1 or switch# show aggregator 2 or switch# show aggregator 3
no aggregator lacp [GroupID]	G	Disable the LACP function of trunk group	switch(config)# no aggregator lacp 1
no aggregator group [GroupID]	G	Remove a trunk group	switch(config)# no aggregator group 2

VLAN Commands Set

Netstar Commands	Level	Description	Example
vlan database	P	Enter VLAN configure mode	switch# vlan database
Vlanmode [portbase 802.1q gvrp]	V	To set switch VLAN mode.	switch(vlan)# vlanmode portbase or switch(vlan)# vlanmode 802.1q or switch(vlan)# vlanmode gvrp
no vlan	V	No VLAN	Switch(vlan)# no vlan
Ported based VLAN configuration			
vlan port-based grpname [Group Name] grp-id [GroupID] port [PortNumbers]	V	Add new port based VLAN	switch(vlan)# vlan port-based grpname test grp-id 2 port 2-4 or switch(vlan)# vlan port-based grpname test grp-id 2 port 2,3,4
show vlan [GroupID] or show vlan	V	Show VLAN information	switch(vlan)# show vlan 23
no vlan group [GroupID]	V	Delete port base group ID	switch(vlan)# no vlan group 2
IEEE 802.1Q VLAN			
vlan 8021q name [GroupName] vid [VID]	V	Change the name of VLAN group, if the group didn't exist, this command can't be applied.	switch(vlan)# vlan 8021q name test vid 22
vlan 8021q port [PortNumber] access-link untag [UntaggedVID]	V	Assign a access link for VLAN by port, if the port belong to a trunk group, this command can't be applied.	switch(vlan)# vlan 8021q port 3 access-link untag 33
vlan 8021q port [PortNumber] trunk-link tag [TaggedVID List]	V	Assign a trunk link for VLAN by port, if the port belong to a trunk group, this command can't be applied.	switch(vlan)# vlan 8021q port 3 trunk-link tag 2,3,6,99 or switch(vlan)# vlan 8021q port 3 trunk-link tag 3-20

Netstar Commands	Level	Description	Example
vlan 8021q port [PortNumber] hybrid-link untag [UntaggedVID] tag [TaggedVID List]	V	Assign a hybrid link for VLAN by port, if the port belong to a trunk group, this command can't be applied.	switch(vlan)# vlan 8021q port 3 hybrid-link untag 4 tag 3,6,8 or switch(vlan)# vlan 8021q port 3 hybrid-link untag 5 tag 6-8
vlan 8021q trunk [PortNumber] access-link untag [UntaggedVID]	V	Assign a access link for VLAN by trunk group	switch(vlan)# vlan 8021q trunk 3 access-link untag 33
vlan 8021q trunk [PortNumber] trunk-link tag [TaggedVID List]	V	Assign a trunk link for VLAN by trunk group	switch(vlan)# vlan 8021q trunk 3 trunk-link tag 2,3,6,99 or switch(vlan)# vlan 8021q trunk 3 trunk-link tag 3-20
vlan 8021q trunk [PortNumber] hybrid-link untag [UntaggedVID] tag [TaggedVID List]	V	Assign a hybrid link for VLAN by trunk group	switch(vlan)# vlan 8021q trunk 3 hybrid-link untag 4 tag 3,6,8 or switch(vlan)# vlan 8021q trunk 3 hybrid-link untag 5 tag 6-8
show vlan [GroupID] or show vlan	V	Show VLAN information	switch(vlan)# show vlan 23
no vlan group [GroupID]	V	Delete port base group ID	switch(vlan)# no vlan group 2

Spanning Tree Commands Set

Netstar Commands	Level	Description	Example
spanning-tree enable	G	Enable spanning tree	switch(config)# spanning-tree enable
spanning-tree priority [0~61440]	G	Configure spanning tree priority parameter	switch(config)# spanning-tree priority 32767
spanning-tree max-age [seconds]	G	Use the spanning-tree max-age global configuration command to change the interval between messages the spanning tree receives from the root switch. If a switch does not receive a bridge protocol data unit (BPDU) message from the root switch within this interval, it recomputed the Spanning Tree Protocol (STP) topology.	switch(config)# spanning-tree max-age 15
spanning-tree hello-time [seconds]	G	Use the spanning-tree hello-time global configuration command to specify the interval between hello bridge protocol data units (BPDUs).	switch(config)# spanning-tree hello-time 3

Netstar Commands	Level	Description	Example
spanning-tree forward-time [seconds]	G	Use the spanning-tree forward-time global configuration command to set the forwarding-time for the specified spanning-tree instances. The forwarding time determines how long each of the listening and learning states last before the port begins forwarding.	switch(config)# spanning-tree forward-time 20
stp-path-cost [1~200000000]	I	Use the spanning-tree cost interface configuration command to set the path cost for Spanning Tree Protocol (STP) calculations. In the event of a loop, spanning tree considers the path cost when selecting an interface to place into the forwarding state.	switch(config)# interface fastEthernet 2 switch(config-if)# stp-path-cost 20
stp-path-priority [Port Priority]	I	Use the spanning-tree port-priority interface configuration command to configure a port priority that is used when two switches tie for position as the root switch.	switch(config)# interface fastEthernet 2 switch(config-if)# stp-path-priority 128
stp-admin-p2p [Auto True False]	I	Admin P2P of STP priority on this interface.	switch(config)# interface fastEthernet 2 switch(config-if)# stp-admin-p2p Auto
stp-admin-edge [True False]	I	Admin Edge of STP priority on this interface.	switch(config)# interface fastEthernet 2 switch(config-if)# stp-admin-edge True
stp-admin-non-stp [True False]	I	Admin NonSTP of STP priority on this interface.	switch(config)# interface fastEthernet 2 switch(config-if)# stp-admin-non-stp False
show spanning-tree	E	Displays a summary of the spanning-tree states.	switch> show spanning-tree
no spanning-tree	G	Disable spanning-tree.	switch(config)# no spanning-tree

QOS Commands Set

Netstar Commands	Level	Description	Example
qos policy [weighted-fair strict]	G	Select QOS policy scheduling	switch(config)# qos policy weighted-fair
qos prioritytype [port-based cos-only tos-only cos-first tos-first]	G	Setting of QOS priority type	switch(config)# qos prioritytype
qos priority portbased [Port] [lowest low middle high]	G	Configure Port-based Priority	switch(config)# qos priority portbased 1 low
qos priority cos [Priority][lowest low middle high]	G	Configure COS Priority	switch(config)# qos priority cos 0 middle
qos priority tos [Priority][lowest low middle high]	G	Configure TOS Priority	switch(config)# qos priority tos 3 high

Netstar Commands	Level	Description	Example
show qos	P	Displays the information of QoS configuration	Switch# show qos
no qos	G	Disable QoS function	switch(config)# no qos

IGMP Commands Set

Netstar Commands	Level	Description	Example
igmp enable	G	Enable IGMP snooping function	switch(config)# igmp enable
igmp-query auto	G	Set IGMP query to auto mode	switch(config)# igmp-query auto
igmp-query force	G	Set IGMP query to force mode	switch(config)# igmp-query force
show igmp configuration	P	Displays the details of an IGMP configuration.	switch# show igmp configuration
no igmp	G	Disable IGMP snooping function	switch(config)# no igmp
no igmp-query	G	Disable IGMP query	switch# no igmp-query

Mac / Filter Table Commands Set

Netstar Commands	Level	Description	Example
mac-address-table static hwaddr [MAC]	I	Configure MAC address table of interface (static).	switch(config)# interface fastEthernet 2 switch(config-if)# mac-address-table static hwaddr 000012345678
mac-address-table filter hwaddr [MAC]	G	Configure MAC address table(filter)	switch(config)# mac-address-table filter hwaddr 000012348678
show mac-address-table	P	Show all MAC address table	switch# show mac-address-table
show mac-address-table static	P	Show static MAC address table	switch# show mac-address-table static
show mac-address-table filter	P	Show filter MAC address table.	switch# show mac-address-table filter
no mac-address-table static hwaddr [MAC]	I	Remove an entry of MAC address table of interface (static)	switch(config)# interface fastEthernet 2 switch(config-if)# no mac-address-table static hwaddr 000012345678
no mac-address-table filter hwaddr [MAC]	G	Remove an entry of MAC address table (filter)	switch(config)# no mac-address-table filter hwaddr 000012348678
no mac-address-table	G	Remove dynamic entry of MAC address table	switch(config)# no mac-address-table

SNMP Commands Set

Netstar Commands	Level	Description	Example
snmp system-name [System Name]	G	Set SNMP agent system name	switch(config)# snmp system-name I2switch
snmp system-location [System Location]	G	Set SNMP agent system location	switch(config)# snmp system-location lab

Netstar Commands	Level	Description	Example
snmp system-contact [System Contact]	G	Set SNMP agent system contact	switch(config)# snmp system-contact where
snmp agent-mode [v1v2c v3 v1v2cv3]	G	Select the agent mode of SNMP	switch(config)# snmp agent-mode v1v2cv3
snmp community-strings [Community] right [RO/RW]	G	Add SNMP community string.	switch(config)# snmp community-strings public right rw
snmp-server host [IP address] community [Community-string] trap-version [v1 v2c]	G	Configure SNMP server host information and community string	switch(config)# snmp-server host 192.168.1.50 community public trap-version v1 (remove) Switch(config)# no snmp-server host 192.168.1.50
snmpv3 context-name [Context Name]	G	Configure the context name	switch(config)# snmpv3 context-name Test
snmpv3 user [User Name] group [Group Name] password [Authentication Password] [Privacy Password]	G	Configure the userprofile for SNMPV3 agent. Privacy password could be empty.	switch(config)# snmpv3 user test01 group G1 password AuthPW PrivPW
snmpv3 access context-name [Context Name] group [Group Name] security-level [NoAuthNoPriv AuthNoPriv AuthPriv] match-rule [Exact Prifix] views [Read View Name] [Write View Name] [Notify View Name]	G	Configure the access table of SNMPV3 agent	switch(config)# snmpv3 access context-name Test group G1 security-level AuthPriv match-rule Exact views V1 V1 V1
snmpv3 mibview view [View Name] type [Excluded Included] sub-oid [OID]	G	Configure the mibview table of SNMPV3 agent	switch(config)# snmpv3 mibview view V1 type Excluded sub-oid 1.3.6.1
show snmp	P	Show SNMP configuration	switch# show snmp
no snmp community-strings [Community]	G	Remove the specified community.	switch(config)# no snmp community-strings public
no snmp-server host [Host-address]	G	Remove the SNMP server host.	switch(config)# no snmp-server host 192.168.1.50
no snmpv3 user [User Name]	G	Remove specified user of SNMPv3 agent.	switch(config)# no snmpv3 user Test

Netstar Commands	Level	Description	Example
no snmpv3 access context-name [Context Name] group [Group Name] security-level [NoAuthNoPriv AuthNoPriv AuthPriv] match-rule [Exact Prifix] views [Read View Name] [Write View Name] [Notify View Name]	G	Remove specified access table of SNMPv3 agent.	switch(config)#no snmpv3 access context-name Test group G1 security-level AuthPr iv match-rule Exact views V1 V1 V1
no snmpv3 mibview view [View Name] type [Excluded Included] sub-oid [OID]	G	Remove specified mibview table of SNMPV3 agent.	switch(config)#no snmpv3 mibview view V1 type Excluded sub-oid 1.3.6.1

Port Mirroring Commands Set

Netstar Commands	Level	Description	Example
monitor [RX TX Both]	I	Configure source port of monitor function	switch(config)# interface fastEthernet 2 switch(config-if)# monitor RX
monitor rx [Port ID]	G	Set RX destination port of monitor function	switch(config)# monitor rx 2
monitor tx [Port ID]	G	Set TX destination port of monitor function	switch(config)# monitor tx 3
show monitor	P	Show port monitor information	switch# show monitor
show monitor	I	Show port monitor information	switch(config)# interface fastEthernet 2 switch(config-if)# show monitor
no monitor	I	Disable source port of monitor function	switch(config)# interface fastEthernet 2 switch(config-if)# no monitor

802.1x Commands Set

Netstar Commands	Level	Description	Example
8021x enable	G	Use the 802.1x global configuration command to enable 802.1x protocols.	switch(config)# 8021x enable
8021x system radiusip [IP address]	G	Use the 802.1x system radius IP global configuration command to change the radius server IP.	switch(config)# 8021x system radiusip 192.168.1.1
8021x system serverport [port ID]	G	Use the 802.1x system server port global configuration command to change the radius server port	switch(config)# 8021x system serverport 1812

Netstar Commands	Level	Description	Example
8021x system accountport [port ID]	G	Use the 802.1x system account port global configuration command to change the accounting port	switch(config)# 8021x system accountport 1813
8021x system sharedkey [ID]	G	Use the 802.1x system share key global configuration command to change the shared key value.	switch(config)# 8021x system sharedkey 123456
8021x system nasid [words]	G	Use the 802.1x system nasid global configuration command to change the NAS ID	switch(config)# 8021x system nasid test1
8021x misc quietperiod [sec.]	G	Use the 802.1x misc quiet period global configuration command to specify the quiet period value of the switch.	switch(config)# 8021x misc quietperiod 10
8021x misc txperiod [sec.]	G	Use the 802.1x misc TX period global configuration command to set the TX period.	switch(config)# 8021x misc txperiod 5
8021x misc supptimeout [sec.]	G	Use the 802.1x misc supp timeout global configuration command to set the supplicant timeout.	switch(config)# 8021x misc supptimeout 20
8021x misc servertimeout [sec.]	G	Use the 802.1x misc server timeout global configuration command to set the server timeout.	switch(config)# 8021x misc servertimeout 20
8021x misc maxrequest [number]	G	Use the 802.1x misc max request global configuration command to set the MAX requests.	switch(config)# 8021x misc maxrequest 3
8021x misc reauthperiod [sec.]	G	Use the 802.1x misc reauth period global configuration command to set the reauth period.	switch(config)# 8021x misc reauthperiod 3000
8021x portstate [disable reject accept authorize]	I	Use the 802.1x port state interface configuration command to set the state of the selected port.	switch(config)# interface fastethernet 3 switch(config-if)# 8021x portstate accept
show 8021x	E	Displays a summary of the 802.1x properties and also the port sates.	switch> show 8021x
no 8021x	G	Disable 802.1x function	switch(config)# no 8021x

TFTP Commands Set

Netstar Commands	Level	Description	Defaults Example
backup flash:backup_cfg	G	Save configuration to TFTP and need to specify the IP of TFTP server and the file name of image.	switch(config)# backup flash:backup_cfg
restore flash:restore_cfg	G	Get configuration from TFTP server and need to specify the IP of TFTP server and the file name of image.	switch(config)# restore flash:restore_cfg
upgrade flash:upgrade_fw	G	Upgrade firmware by TFTP and need to specify the IP of TFTP server and the file name of image.	switch(config)# upgrade flash:upgrade_fw

SystemLog, SMTP and Event Commands Set

Netstar Commands	Level	Description	Example
systemlog ip [IP address]	G	Set System log server IP address.	switch(config)# systemlog ip 192.168.1.100
systemlog mode [client server both]	G	Specified the log mode	switch(config)# systemlog mode both
show systemlog	E	Displays system log.	Switch> show systemlog
show systemlog	P	Show system log client & server information	switch# show systemlog
no systemlog	G	Disable systemlog function	switch(config)# no systemlog
smtp enable	G	Enable SMTP function	switch(config)# smtp enable
smtp serverip [IP address]	G	Configure SMTP server IP	switch(config)# smtp serverip 192.168.1.5
smtp authentication	G	Enable SMTP authentication	switch(config)# smtp authentication
smtp account [account]	G	Configure authentication account	switch(config)# smtp account User
smtp password [password]	G	Configure authentication password	switch(config)# smtp password
smtp rcptemail [Index] [Email address]	G	Configure Rcpt e-mail Address	switch(config)# smtp rcptemail 1 Alert@test.com
show smtp	P	Show the information of SMTP	switch# show smtp
no smtp	G	Disable SMTP function	switch(config)# no smtp
event device-cold-start [Systemlog SMTP Both]	G	Set cold start event type	switch(config)# event device-cold-start both
event authentication-failure [Systemlog SMTP Both]	G	Set Authentication failure event type	switch(config)# event authentication-failure both
event ring-topology-change [Systemlog SMTP Both]	G	Set M-ring topology changed event type	switch(config)# event ring-topology-change both
event systemlog [Link-UP Link-Down Both]	I	Set port event for system log	switch(config)# interface fastethernet 3 switch(config-if)# event systemlog both

Netstar Commands	Level	Description	Example
event smtp [Link-UP Link-Down Both]	I	Set port event for SMTP	switch(config)# interface fastethernet 3 switch(config-if)# event smtp both
show event	P	Show event selection	switch# show event
no event device-cold-start	G	Disable cold start event type	switch(config)# no event device-cold-start
no event authentication-failure	G	Disable Authentication failure event type	switch(config)# no event authentication-failure
no event ring-topology-change	G	Disable M-ring topology changed event type	switch(config)# no event ring-topology-change
no event systemlog	I	Disable port event for system log	switch(config)# interface fastethernet 3 switch(config-if)# no event systemlog
no event smtp	I	Disable port event for SMTP	switch(config)# interface fastethernet 3 switch(config-if)# no event smtp
show systemlog	P	Show system log client & server information	switch# show systemlog

SNTP Commands Set

Netstar Commands	Level	Description	Example
sntp enable	G	Enable SNTP function	switch(config)# sntp enable
sntp daylight	G	Enable daylight saving time, if SNTP function is inactive, this command can't be applied.	switch(config)# sntp daylight
sntp daylight-period [Start time] [End time]	G	Set period of daylight saving time, if SNTP function is inactive, this command can't be applied. Parameter format: [yyyymmdd-hh:mm]	switch(config)# sntp daylight-period 20060101-01:01 20060202-01-01
sntp daylight-offset [Minute]	G	Set offset of daylight saving time, if SNTP function is inactive, this command can't be applied.	switch(config)# sntp daylight-offset 3
sntp ip [IP]	G	Set SNTP server IP, if SNTP function is inactive, this command can't be applied.	switch(config)# sntp ip 192.169.1.1
sntp timezone [Timezone]	G	Set timezone index, use 'show sntp timzezone' command to get more information of index number	switch(config)# sntp timezone 22
show sntp	P	Show SNTP information	switch# show sntp
show sntp timezone	P	Show index number of time zone list	switch# show sntp timezone
no sntp	G	Disable SNTP function	switch(config)# no sntp
no sntp daylight	G	Disable daylight saving time	switch(config)# no sntp daylight

m-ring Commands Set

Netstar Commands	Level	Description	Example
ring enable	G	Enable M-ring	switch(config)# ring enable
ring master	G	Enable ring master	switch(config)# ring master
ring couplering	G	Enable couple ring	switch(config)# ring couplering
ring dualhoming	G	Enable dual homing	switch(config)# ring dualhoming
ring ringport [1st Ring Port] [2nd Ring Port]	G	Configure 1st/2nd Ring Port	switch(config)# ring ringport 7 8
ring couplingport [Coupling Port]	G	Configure Coupling Port	switch(config)# ring couplingport 1
ring controlport [Control Port]	G	Configure Control Port	switch(config)# ring controlport 2
ring homingport [Dual Homing Port]	G	Configure Dual Homing Port	switch(config)# ring homingport 3
show ring	P	Show the information of M - Ring	switch# show ring
no ring	G	Disable M-ring	switch(config)# no ring
no ring master	G	Disable ring master	switch(config)# no ring master
no ring couplering	G	Disable couple ring	switch(config)# no ring couplering
no ring dualhoming	G	Disable dual homing	switch(config)# no ring dualhoming

Order Information

Art.-No.	Description	Connectors
MS651230M	Industrial Gigabit Ethernet Switch with M-Ring 16x 10/100Base-TX 2x 100/1000Base-X SFP Combo Port	2x SFP slot 18x RJ-45 2x Power, 1x Console

MICROSENS reserves the right to make any changes without further notice to any product to improve reliability, function or design. MICROSENS does not assume any liability arising out of the application or use of any product. 5008/md

www.microsens.com