# RECESSED AR111 **V TRIMLESS**

## **DESCRIPTION:**

An adjustable AR111 fixture suitable for multiple downlighting applications with one point of electrical entry. Powder coat finish on housing & lamp assembly. Housing suitable for new construction applications.

## **CONSTRUCTION:**

All aluminum construction. Perforated mesh plaster frame adheres to ceiling compound for seamless trimless mounting. Beveled fixture opening provides easy mudding compound application. Can accommodate 0.50" or 0.625" drywall. Includes butterfly brackets for black iron commercial mounting.

#### LAMP ASSEMBLY:

5 - AR111 lamps mounted in adjustable bezels. Each lamp can accept up to two optical accessories. 380° x 45° locking adjustment. Fixture provides 45° visual cut-off. Lamp holders retract for added internal adjustment.

# SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

# **ELECTRICAL**:

Integral electronic transformer. Secondary lead is 11.5V. Primary lead is 120V. Dimmable. Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. Fused and short circuit protection. Transformers and electrical accessible through ceiling opening via access door on housing sidewall.

ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.

120 Volt



Catalog #


Type

**Project** 

# COMBOLIGHT® LV Series

**FIVE (5) Light Recessed Next Generation Trimless** Multi-Lamp Luminaire Low Voltage AR111

Dimensions	A Housing Length	B Housing Height	C Aperture Length	D Aperture Width	E Plaster Frame Width	F Plaster Frame Length	<b>G</b> Above Ceiling Width	Ceiling Cut-Out
	41.77"	8.40"	36.00"	7.00"	12.75"	41.75"	14.95"	39.25" x 10.25"

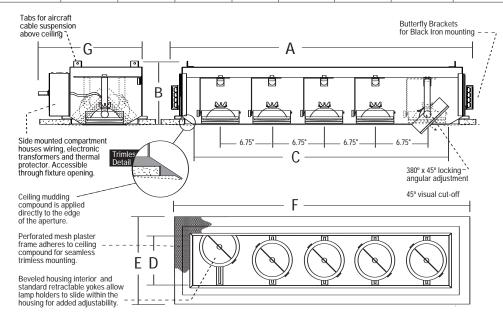



**Other Adders** CC - Two Circuit

CP - Chicago Plenum

ORDERING EXAMPLE: LV1250 WH 120 = Five Light Trimless Recessed AR111 - White Interior - 50 watt lamps -

	Optional Accessories - Details on Other Side					
	8	0	0			
ı	Baffle	Snoots	Louvers	Lenses		

Cat. # / Description	Interior Finish	Lamp Wattage	Voltage
LV1250 : 5 Light Recessed Next Generation Trimles: Combo Fixture	BK - Black	<b>35</b> - 35 Watt AR111	120 - 120 Volt (Standard) 277 - 277 Volt
12V AR111	WH - White	<b>50 -</b> 50 Watt AR111	
	S - Silver	<b>75 -</b> 75 Watt AR111	
	PT - Custom (Specify)	100 - 100 Watt AR111	
SPECIFY - LV1250			



