RECESSED PAR30MH

DESCRIPTION:

An adjustable PAR30MH fixture suitable for multiple downlighting applications with one point of electrical entry. Powder coat finish on housing & lamp assembly. Housing suitable for new construction applications.

CONSTRUCTION:

All aluminum construction. Perforated mesh plaster frame adheres to ceiling compound for seamless trimless mounting. Beveled fixture opening provides easy mudding compound application. Can accommodate 0.50" or 0.625" drywall. Includes butterfly brackets for black iron commercial mounting.

LAMP ASSEMBLY:

5 - PAR30MH lamps mounted in adjustable bezels. Each lamp can accept up to two optical accessories. 380° x 45° locking adjustment. Fixture provides 45° visual cut-off. Lamp holders retract for added internal adjustment.

SYSTEM PROTECTION:

Thermal protection provided to guard against overheating, and misuse of insulation over and around fixture. Vent holes in housing provide cooler operation

ELECTRICAL:

Aromat[®] electronic metal halide ballsts in remote housing. Junction box is UL listed for through branch wiring, (access above ceiling not required) for 8 #12, 90°C supply conductors or 60°C for end of run. Ballasts and electrical accessible through ceiling opening via access door on housing sidewall.

ALL RSA COMBOLIGHT PRODUCTS ARE MADE IN THE U.S.A.



Catalog


Туре

Project

COMBOLIGHT® LV Series

FIVE (5) Light Recessed Next Generation Trimless Multi-Lamp Luminaire PAR30 Metal Halide

Dimensions	A Housing Length	B Housing Height	C Aperture Length	D Aperture Width	E Plaster Frame Width	F Plaster Frame Length	G Above Ceiling Width	Ceiling Cut-Out
	41.77″	8.40″	36.00″	7.00″	12.75″	41.75″	14.95″	39.25" x 10.25"

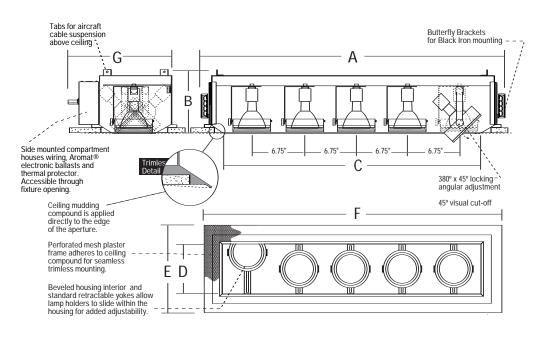



Snoots

Optional A

Baffle

Other Adders CC - Two Circuit CP - Chicago Plenum

Lenses

Details on Other Side

Louvers

= Five Light Trimless Recesson 120 Volt	ed PAR30MH	- White Inte	erior - 70 wat	t lamps -

Includes Aromat[®] Electronic

Metal Halide Ballasts

ORDERING EXAMPLE: LV350MH

Cat. # / Des	scription	Interior Finish	Lamp Wattage	Voltage
LV350MH	: 5 Light Recessed Next Generation Trimless Combo Fixture	BK - Black	39 - 39 Watt PAR30MH	120 - 120 Volt (Standard)
	PAR30MH	WH - White	70 - 70 Watt PAR30MH	277 - 277 Volt
		S - Silver		
		PT - Custom (Specify)		
SPECIFY -	LV350MH			

WH

70

120



