

85.0mm



User's Manual ▶

2.5"/3.5" Dual Bay HDD Docking Station

TOOL FREE



[http:// www.liztek.com](http://www.liztek.com)

2.5"/3.5" Dual Bay HDD Docking Station

Product Introduction

LIZTEK 2.5"/3.5" USB 3.0 Dual Bay HDD Docking Station enables you to access and transfer data between your computer and two hard drives simultaneously, or between the two hard drives themselves. Moreover, you can also use the docking station to clone hard drives offline at maximum speed. Plug and play support for both 2.5" and 3.5" SATA, SATA II, SATA III and SSD HDDs up to 4TB. USB 3.0 Interface supports super speed data transfer up to 5Gbps (reverse compatible with USB 2.0). Especially ideal for system integrators, administrators and computer technicians.

Product Specification

Product model	LIZTEK HDDT2B5
Product name	2.5"/3.5" USB 3.0 Dual Bay HDD Docking Station
Interface	USB 3.0 (also compatible with USB 2.0)
Product material	Plastic
Product color	Black
Product dimensions	135*121*65 mm
Input interface	USB Input*1 / DC-IN*1
Operating system	Windows XP/2003/Vista/7/2008/8 & MAC With USB Port
Safety approval	CE and FCC Approval

Product Features

- Top slot-loading with Tool Free design
- Dual Bay SATA docks fits 2x2.5" or 3.5" SATA HDD or SSD
- Super Speed USB 3.0 5Gbps
- One step duplication of drives without the need of a computer
- Plug and play. No additional drivers or utility needed

Box Content



HDD docking station	1Pc
USB data cable	1Pc
Power Adapter	1Pc
User's Manual	1Pc

1

Environment Requirements

Hardware system requirements: PC/MAC which support USB3.0
Operation system requirements: Windows 2000/XP/7 or above ,MAC OS or above


Product Schematic

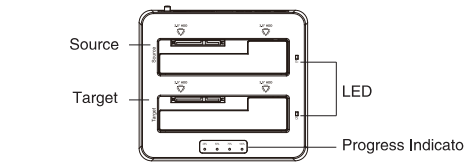

2


Duplicating Indicator

1. Place the Dock on your Desk or Workbench and ensure it is Standing Safe and Secure
2. Mount Drive to HDD Slot of ORICO Dock.




Note, Mount Drive to HDD Slot 1 is Recommended when ONLY 1 Drive is need to mount.

3. Connect the ORICO Dock to Outlet or Power Strip via the Power Cord and Power Adapter in the Box.



4. Turn ON the ON/OFF Switch.



5. Connect the ORICO Dock to Computer via USB Cable in the Box. Drives will show up in Computer or Disk Management soon.

6. Remove the Drives from the your computer when you do not need to use it. Then Remove the USB Cable, Turn OFF the Dock, Remove the Power Supply Unit and Remove the Drives from the Dock.

3

Duplicating Drives

1. Please ensure the volume of the Target Hard Drive is larger than the Source Hard Drive when duplicating drives from the same manufacturer with the same model number. The drives may have tiny differences in volume that may cause the failure of duplicating.
2. Please back up files in the Target Hard Drive before duplicating. Any files in the Target Hard Drive will be overwritten when duplicating.
3. a) Turn OFF the docking station.
b) Disconnect the USB cable.
c) Plug the Source Hard Drive into the Source Hard Drive slot.
d) Plug the Target Hard Drive into the Target Hard Drive slot.
e) Turn ON the Control Switch on the rear panel to "Clone".
f) Turn ON the docking station.
g) Then clicking the "Start" button on the rear panel will start the duplicating.
4. The duplicating is "Disk to Disk" but not "File to File". Copy/Duplicate an empty 1TB Hard Drive will take the same time of a full filled 1TB Hard Drive.
5. The speed of duplicating is 60-80MB per second.
2 hours will be needed to duplicate a 500GB Drive.
4 hours will be needed to duplicate a 1TB Drive.
8 to 9 hours will be needed to duplicate a 2TB Drive
6. The LED will flicker when duplicating.
Three Buzzes will sound when duplicating is finished.
7. Drives will go into Suspend Mode for energy savings when the duplicating is finished.
a) Turn OFF the docking station.
b) Turn the Control Switch to "PC".
c) Turn ON the docking station.
d) Attaching the docking station to a computer with the USB cable can help you check the duplicated drives.

4

Hardware Installation

- a) Connect power line with outlet, DC connector with DC interface.
- b) Connect USB-A type cable with computer USB interface, plug USB-B into USB type female interface.
- c) SATA hard disk should be faced up, align hard seat SATA interface of HDD docking station, parallel push hard disk docking station SATA interface perfectly. Open the DC power supply switch, find the equipment in the computer, lower right corner have mobile hardware hint the hard disk management will have corresponding mobile hardware hint can be seen.

Device Exit

Note: When you need to exit the mobile devices, please stop data read & write first, otherwise unable to exit the mobile device.

- a) On your computer select "Eject the USB device"
- b) When the Windows suggests that "Safely Remove Hardware"...
- c) Then remove the device

Exit from Mac OS:

Select the mobile hardware icon, left-click and drag it to recycle bin, safely remove the hardware.

Partition and Formatting

Your newly purchased HDD must be pre-partitioned and formatted for the computer operating system to correctly identify and use the hard disk. If your HDD has been partitioned or formatted, you can use them directly. The computer disk will display the new volume.

Warning!

Disconnect the data cables is not available in the data transfer process, otherwise will lead to data transmission errors, in order to avoid data loss, please follow the above instructions.

Note:

1. Do not beat this product and put it in damp or direct sunlight high temperature environment.
2. HDD is high-precision electronic products please read user manual carefully to enable right operation.
3. If because of your improper use, demolition or operation not according to the instructions result an damage of your device or USB3.0 hub, the company will not be liable for any damages or maintenance responsibility.

5

FCC and CE Radiation Norm

FCC
This equipment has been tested and found to comply with the limits for Class B digital device pursuant to Part 15 of Federal Communications Commission (FCC) rules.

CE
This equipment has been tested and found to comply with the limits of the European Council Directive on the approximation of law of the member states relating to electromagnetic compatibility (89/336/EEC) according to EN 55022 Class B.

FCC and CE Compliance Statement
These limits are designed to provide reasonable protection against frequency interference in residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed or used in accordance with the instructions, may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in television reception, which can be determined by turning the equipment off and on. The user is encouraged to try and correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna; Increase the separation between the equipment and the receiver; Connect the equipment into an outlet on a circuit different from that to which the receiver is connected to.

CAUTION!
The Federal Communication Commission warns the user that changes or modifications to the unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Disclaimer Statement

Thank you for your choice to purchase and use LIZTEK products! Please read this user manual carefully before using the product, to ensure correct operation method. We strongly recommend you to make data backup before using this product so as to make sure your data are completely safe. As the equipment manufacturer, LIZTEK does not afford any direct or indirect responsibility for documents and data loss caused by any factor. Manufacturers do not have the obligation to afford any compensation and data recovery. LIZTEK does not make special promise to users and distributors. LIZTEK does not afford any unexpected data loss, direct or indirect loss. If you start to use this product, that means you understand and accept this disclaimer!

Copyright description: All LIZTEK products and relative datas belong to LIZTEK. LIZTEK has the right of produce and copyright, reproduction is prohibited. This user manual includes, but not limited to all information with copyright protection, without permission from LIZTEK, no one is allowed to clone, copy, excerpt, translation or use for other things.

This user manual does not have any form of warranty, position statement or other hint. If there is any direct or indirect data loss, economic loss or enterprise bankruptcy caused by this user manual or its product information mentioned, LIZTEK and its staff will not afford any responsibility for that. Besides, the product specification and information mentioned in this user manual are just for your reference, and contents will update at any time without further notice. LIZTEK will not take responsibility for any error or negligence in this user manual.

The product name mentioned in this user manual can be only used for identification, and this name may be part of the other company's registered trademark or production rights. When below two situations happened, this product will not have LIZTEK's warranty and service.
(1) The product does not belong to LIZTEK's authorization of warranty, specification alteration and parts replacement.
(2) Product bar code is vague or lost.
The user manual will update as the product specification or driver's change. Please visit the LIZTEK official website to get the details: www.liztek.com.

6

Note

1. Do not tamper with this product or expose to excessive heat, humidity, or direct sunlight.
2. Our company will not be held responsible for any damage to product or its accessories/data caused by improper use and/or disassembly. Please use this product according to the instructions.

Warranty

Our company provides warranty of **18 MONTHS** from the date of purchase.

Contact Us

For any inquiries or comments concerning our products, please send email to support@liztek.com, and we will contact you as soon as possible. If there is any quality related issue with the product, you may request a replacement or refund by submitting a request at <http://support.liztek.com>

Statement

We are only able to provide after sales service for purchases made directly from Liztek. If you purchased product from a different retailer, Please contact them for exchange/refund.

7