



US006289466B1

(12) **United States Patent**  
**Bayramoglu et al.**

(10) **Patent No.:** **US 6,289,466 B1**  
(45) **Date of Patent:** **Sep. 11, 2001**

(54) **USAGE OF MONITOR BEZEL BUTTONS TO CONTROL AND INDICATE MULTIMEDIA FUNCTIONS**

(75) Inventors: **Gokalp Bayramoglu**, Houston; **Henry M. D'Souza**, Cypress; **Valiuddin Ali**, Houston, all of TX (US)

(73) Assignee: **Compaq Computer Corporation**, Houston, TX (US)

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **08/885,586**

(22) Filed: **Jun. 30, 1997**

**Related U.S. Application Data**

(60) Provisional application No. 60/049,979, filed on Jun. 11, 1997.

(51) **Int. Cl.**<sup>7</sup> ..... **G06F 1/26**; G06F 1/28; G06F 1/30

(52) **U.S. Cl.** ..... **713/310**; 713/300; 713/320; 713/330; 713/340; 714/22; 710/8; 710/10; 710/14

(58) **Field of Search** ..... 395/750.01, 750.02, 395/750.03, 750.05, 750.07, 750.08, 182.2, 154, 500; 345/10, 514; 365/227; 370/465, 79; 713/300-340; 714/22; 710/8, 10, 14

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

- 5,319,705 \* 6/1994 Halter et al. .... 380/4
- 5,375,245 \* 12/1994 Solhjell et al. .... 395/750.03
- 5,428,730 \* 6/1995 Baker et al. .... 395/154

(List continued on next page.)

**FOREIGN PATENT DOCUMENTS**

- 19543942A1 5/1997 (DE) .
- 0701194A1 8/1995 (EP) .
- 11030976A \* 2/1999 (JP) .

**OTHER PUBLICATIONS**

*European Search Report*, EP 98 30 4568, Oct. 8, 1998, 2 pp. *E-Mail/Fax In-Box Indicator*, IBM® Technical Disclosure Bulletin, vol. 39, No. 7, Jul. 1996, pp. 171-172.

*Convenient Hard-Disk Usage Monitor*, IBM® Technical Disclosure Bulletin, vol. 36, No. 09B, Sep. 1993, p. 275.

*Monitor Indicators*, IBM® Technical Disclosure Bulletin, vol. 37, No. 12, Dec. 1994, p. 219.

Intel® Universal Host Controller Interface (UHCI) Design Guide, Revision 1.1, Mar. 1996. pp. 1-41, Copyright 1996.

Intel® 8x930Ax, 8x930Hx Universal Serial Bus Microcontroller User's Manual, pp. 1-1 through 2-17.

Intel® Corporation, Advanced Information 8x930Hx Universal Serial Bus Hub Peripheral Controller, May 1997, pp. 1-33, Copyright 1997.

Intel® Corporation, Intel's New 430TX PCIset Richer Multimedia Plus World-Class Power Management, Copyright 1997.

(List continued on next page.)


*Primary Examiner*—Rupal Dharia

(74) *Attorney, Agent, or Firm*—Akin, Gump, Strauss, Hauer & Feld, LLP

(57) **ABSTRACT**

A computer system includes a monitor having a universal serial bus (USB) interface for connecting with a base system. Multiple button and LED controls are conveniently placed on a front bezel of the monitor. As the buttons are actuated, commands are passed to the base system via the USB. An on-screen display button causes an application to be launched on the base system for modifying screen attributes stored in a monitor controller in the monitor. A USB controller in the monitor updates the monitor controller via the USB. A multifunction audio dial is toggled by a bezel button between volume, bass and treble functions. The USB controller is also operable to provide a sustain a blinking LED even while the base system is in a sleep mode. LEDs on the front bezel indicate monitor and base system power status.

**12 Claims, 6 Drawing Sheets**

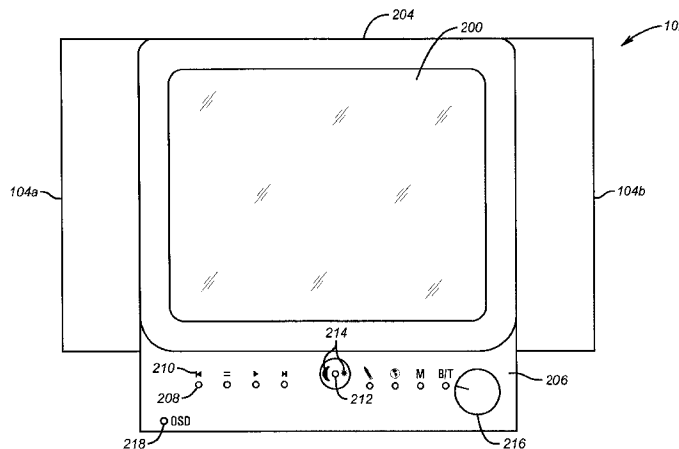

U.S. PATENT DOCUMENTS

|           |   |         |                |            |
|-----------|---|---------|----------------|------------|
| 5,436,898 | * | 7/1995  | Bowen et al.   | 370/79     |
| 5,440,690 | * | 8/1995  | Rege et al.    | 395/200.02 |
| 5,483,260 | * | 1/1996  | Parks et al.   | 345/156    |
| 5,553,294 |   | 9/1996  | Nanno et al.   | 713/340    |
| 5,559,531 |   | 9/1996  | Schiffer       | 345/168    |
| 5,563,839 | * | 10/1996 | Herdt et al.   | 365/227    |
| 5,565,897 |   | 10/1996 | Kikinis et al. | 345/213    |
| 5,581,772 |   | 12/1996 | Nanno et al.   | 713/340    |
| 5,630,104 | * | 5/1997  | Ottesen et al. | 395/500    |
| 5,636,211 | * | 6/1997  | Newlin et al.  | 370/465    |
| 5,638,083 | * | 6/1997  | Margeson       | 345/10     |
| 5,657,417 |   | 8/1997  | Di Troia       | 358/829    |
| 5,680,323 | * | 10/1997 | Barnard        | 364/514 A  |
| 5,708,820 | * | 1/1998  | Park et al.    | 395/750.05 |
| 5,758,172 | * | 5/1998  | Seo            | 395/750.01 |
| 5,758,174 |   | 5/1998  | Crump et al.   | 713/323    |
| 5,781,028 |   | 7/1998  | Decuir         | 326/30     |
| 5,802,318 |   | 9/1998  | Murray et al.  | 710/100    |
| 5,815,679 | * | 9/1998  | Liu            | 710/129    |

|           |   |         |             |         |
|-----------|---|---------|-------------|---------|
| 5,831,597 | * | 11/1998 | West et al. | 345/163 |
| 5,867,149 | * | 2/1999  | Jaeger      | 345/172 |
| 5,938,772 | * | 8/1999  | Welch       | 713/320 |

OTHER PUBLICATIONS

Microsoft Corporation, WDM USB Driver Interface, Copyright 1997.

Microsoft Corporation, USB Plug and Play IDs and Selecting Device Drivers to Load, Copyright 1997.

USB (Universal Serial Bus) Home Page, The Simple and Flexible Way to Connect External Devices to Your Desktop or Notebook PC.

S3, Products Descriptions.

Standard Microsystems Corporation (SMC®), Personal Computer Input/Output Products, Copyright 1995-1997.

ESS Technology, Inc., ES1887 AudioDrive Product Brief.

\* cited by examiner

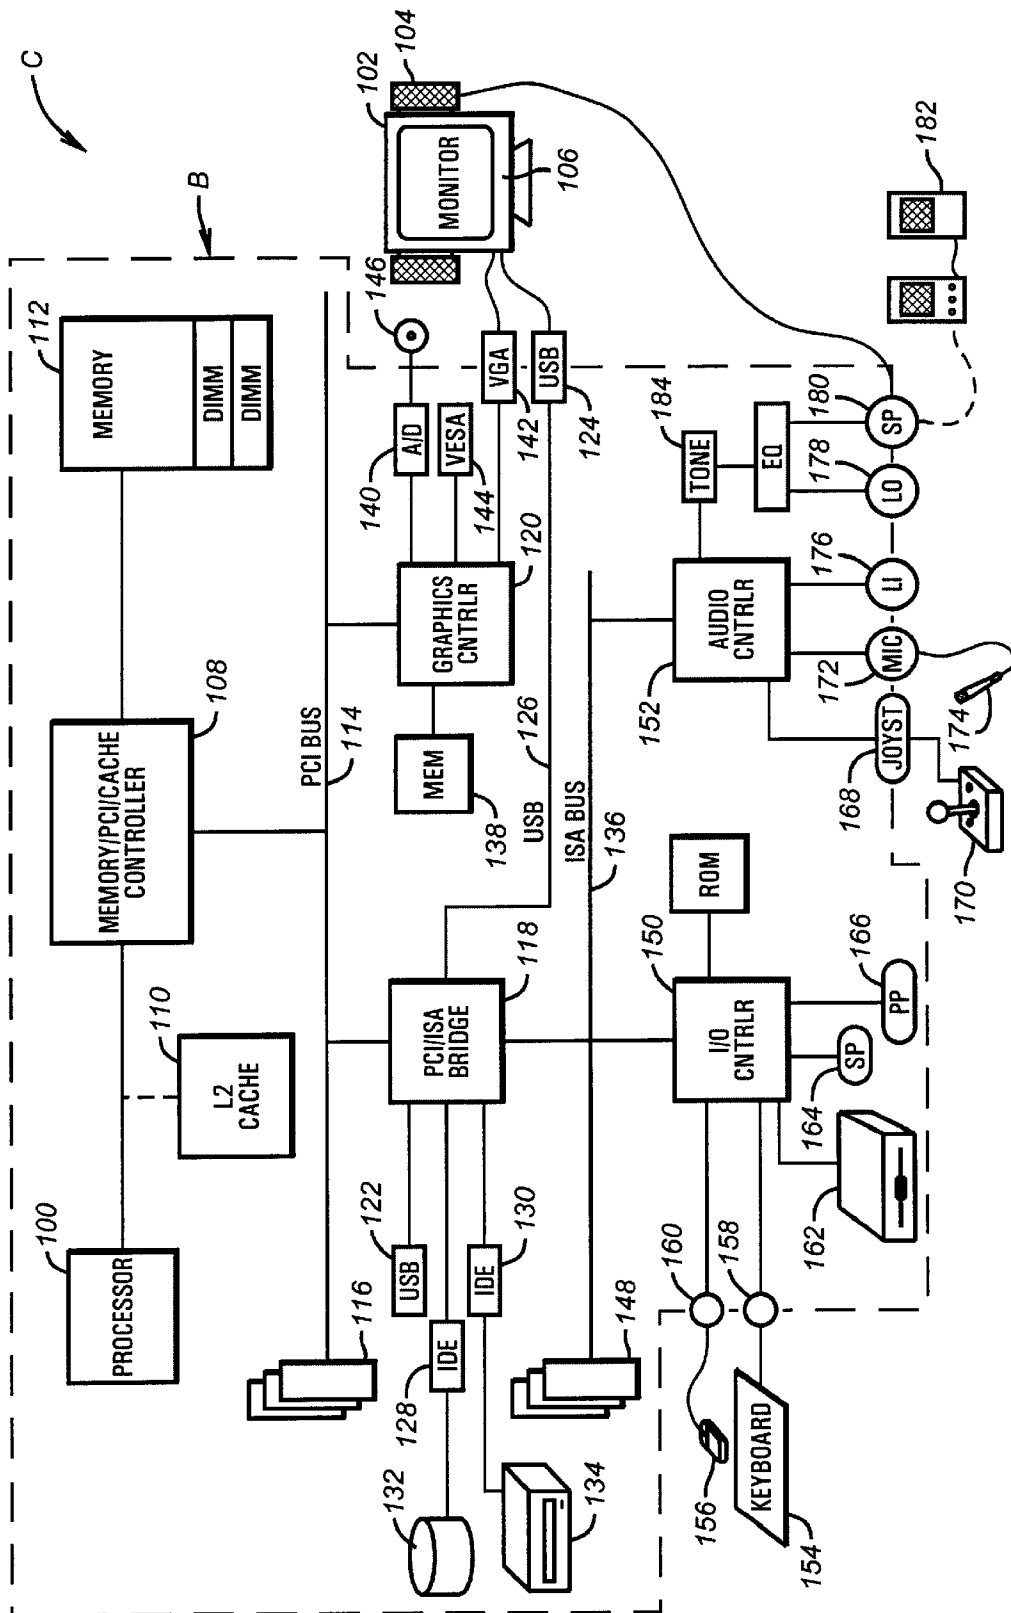


FIG. 1

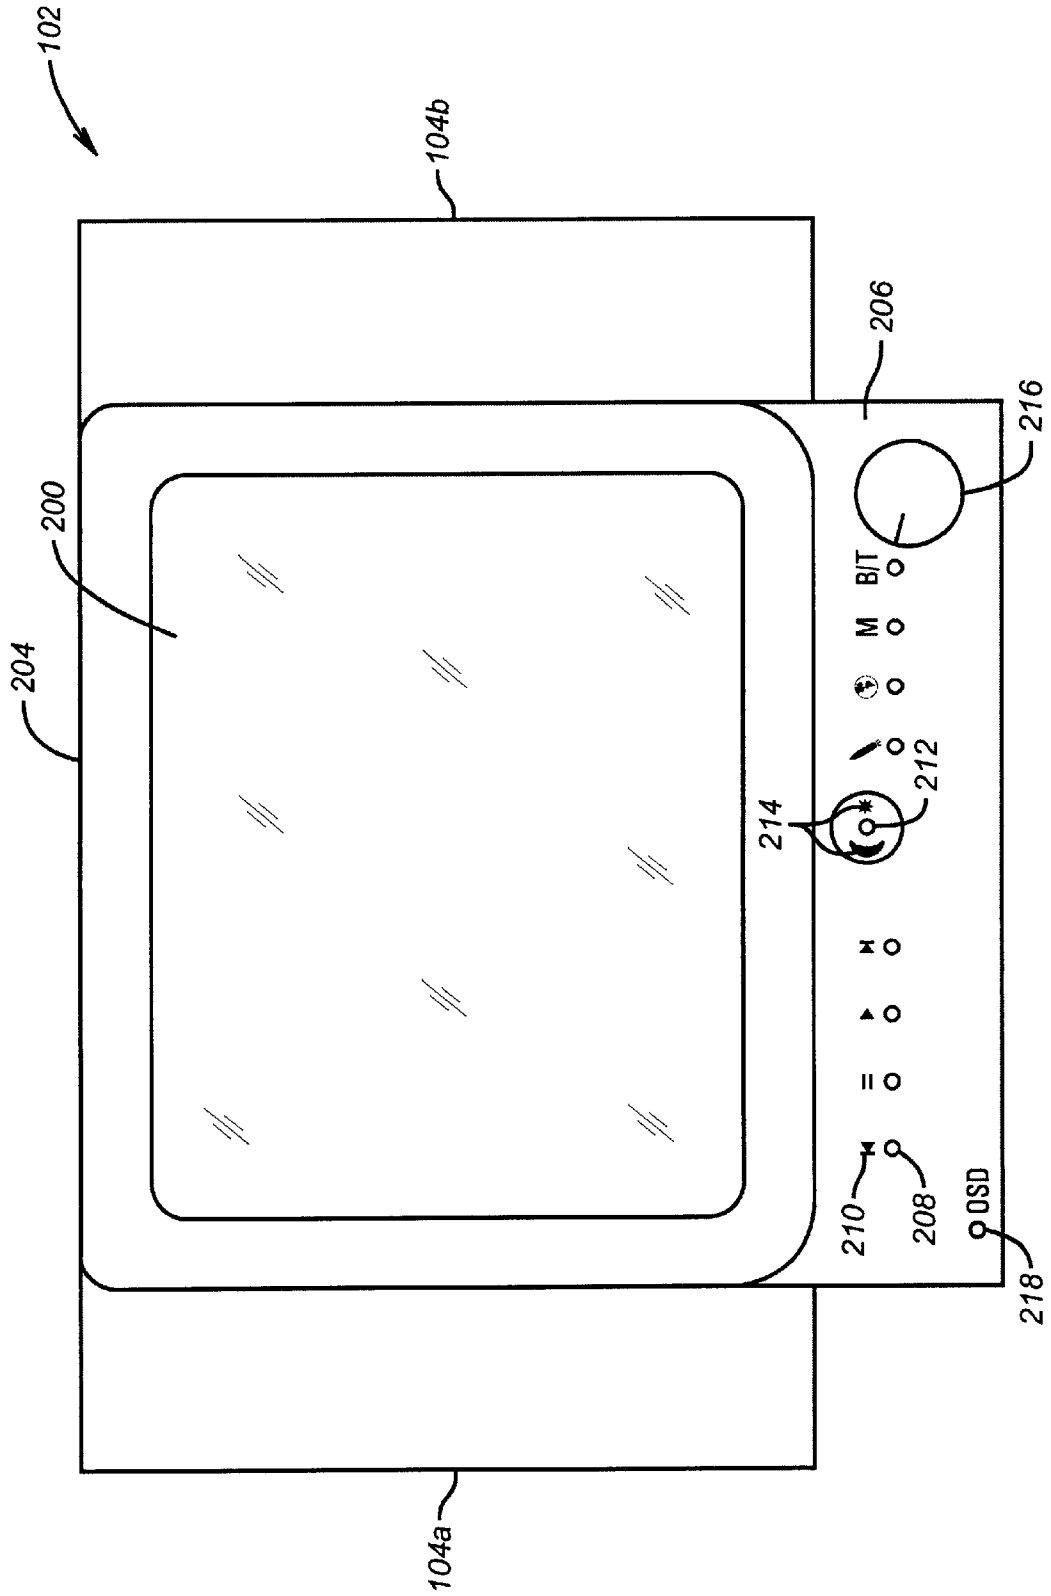


FIG. 2

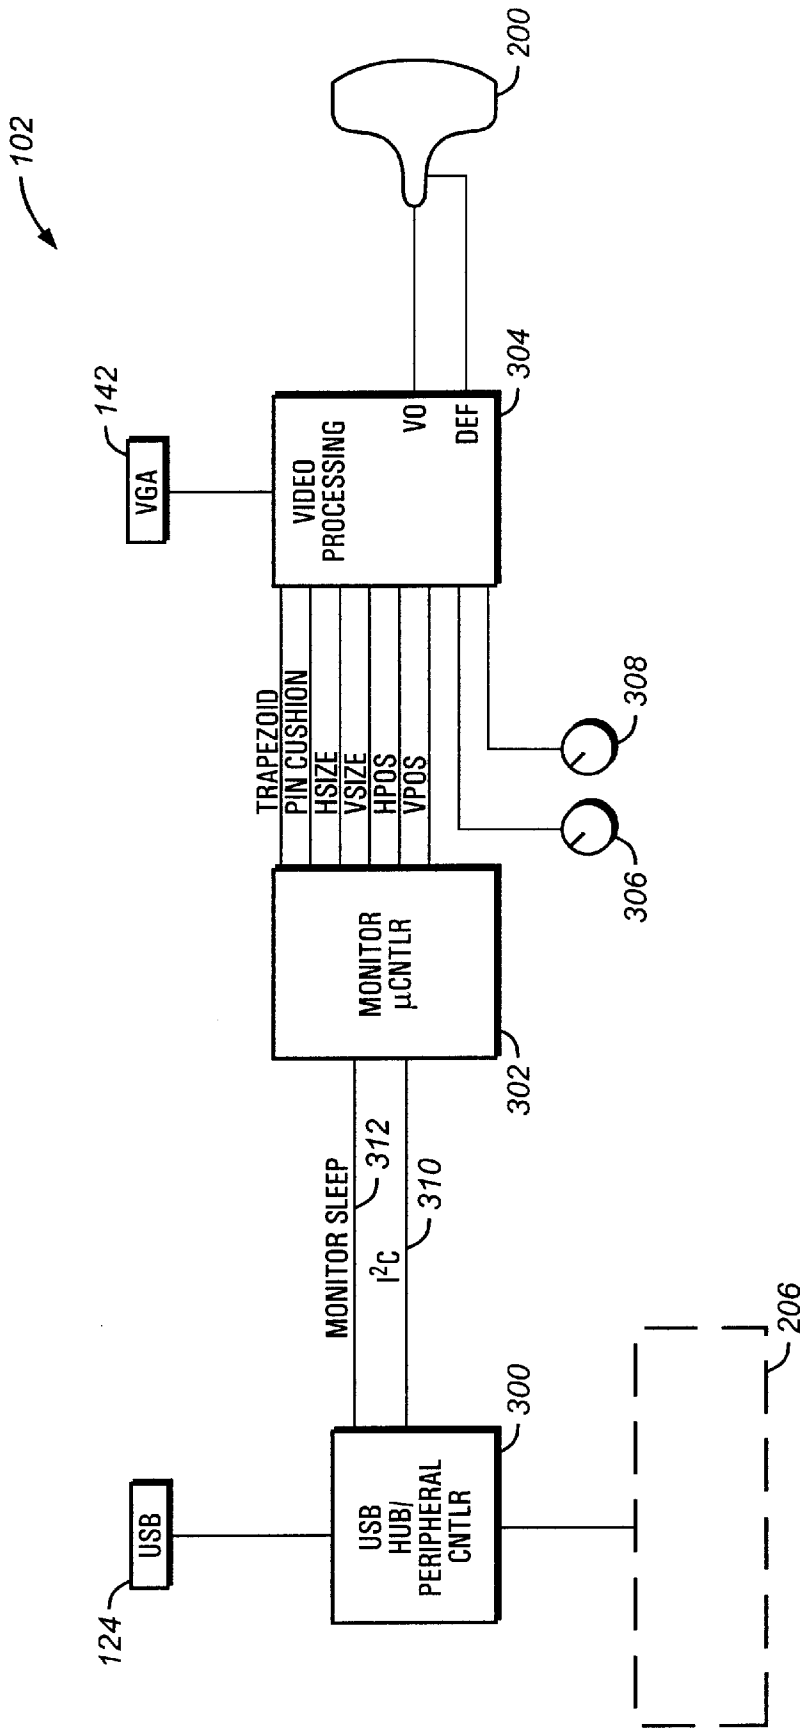


FIG.3

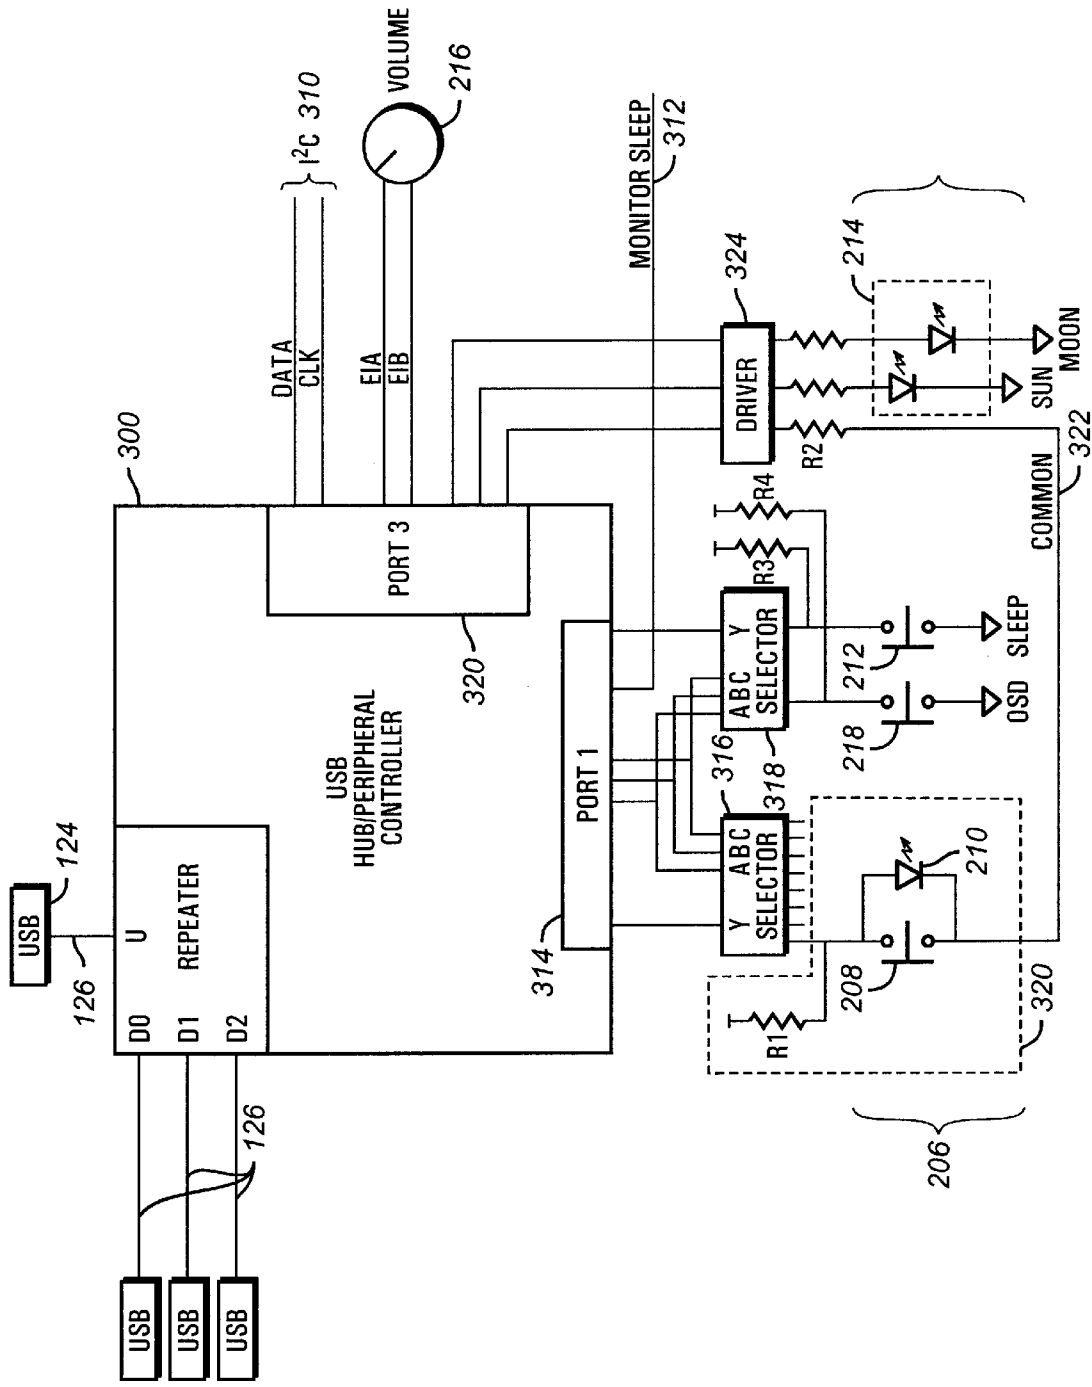


FIG. 4


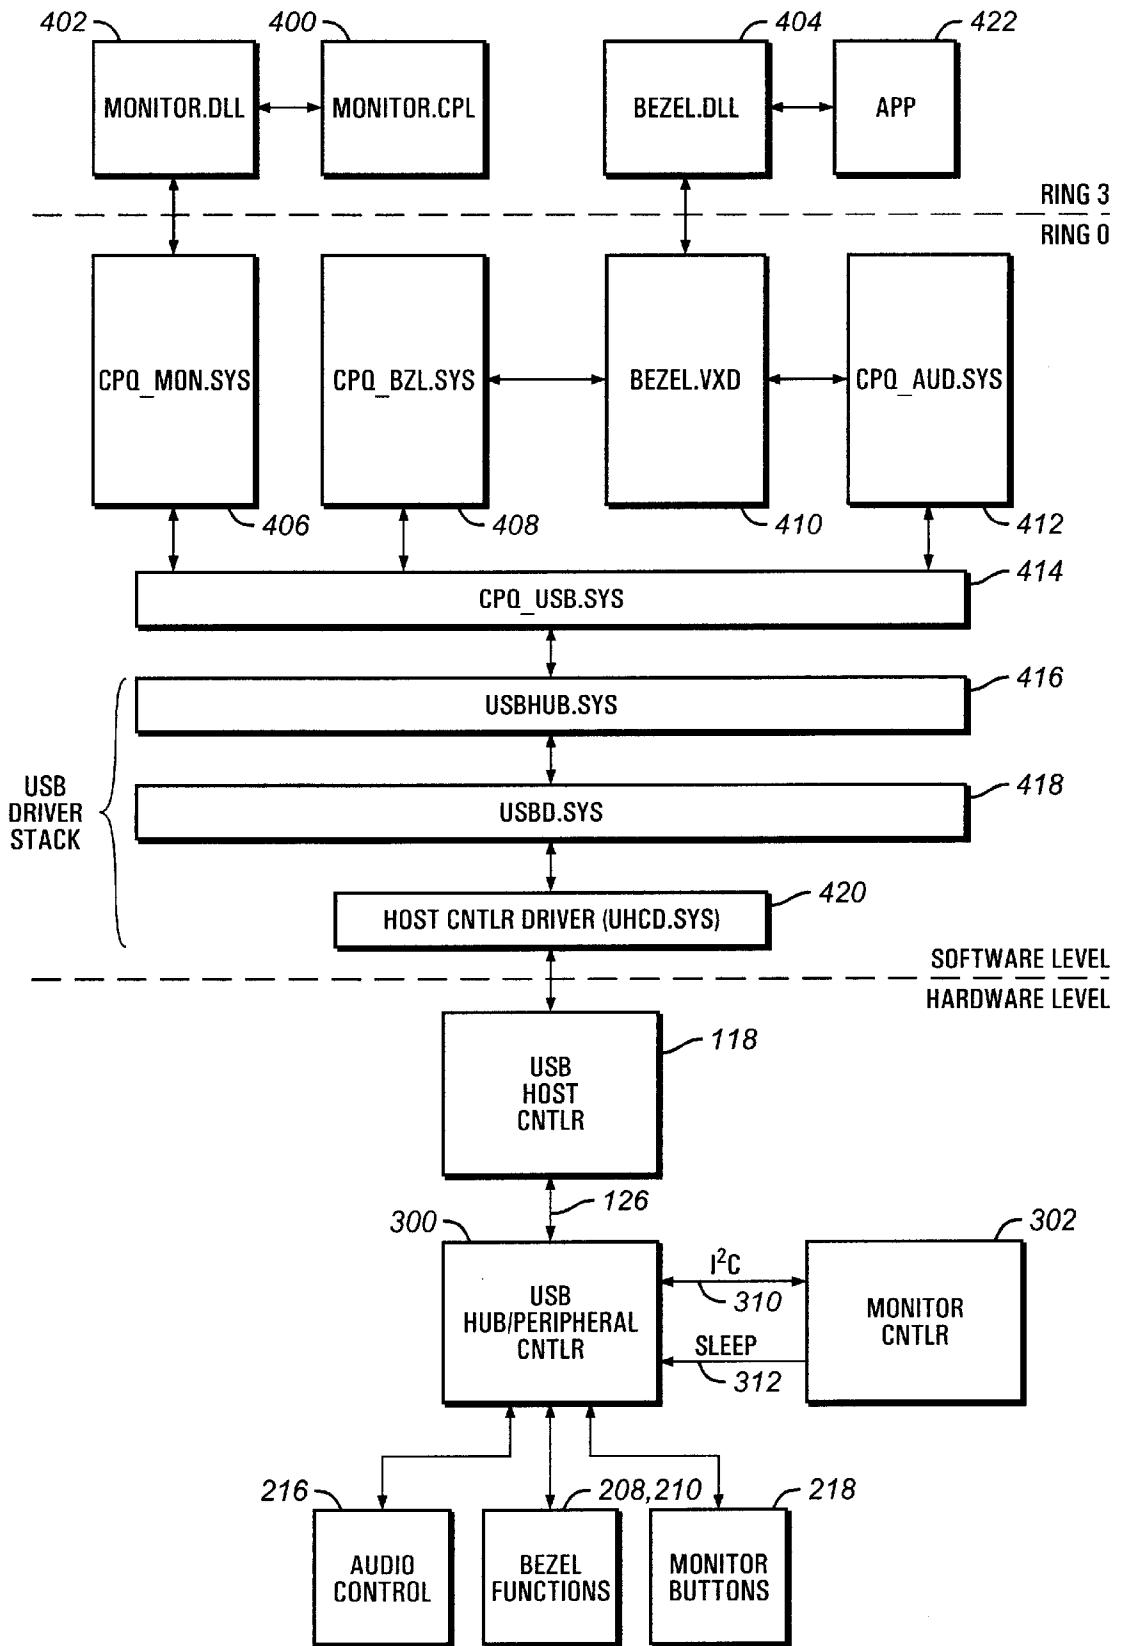


FIG. 5



**FIG. 6**

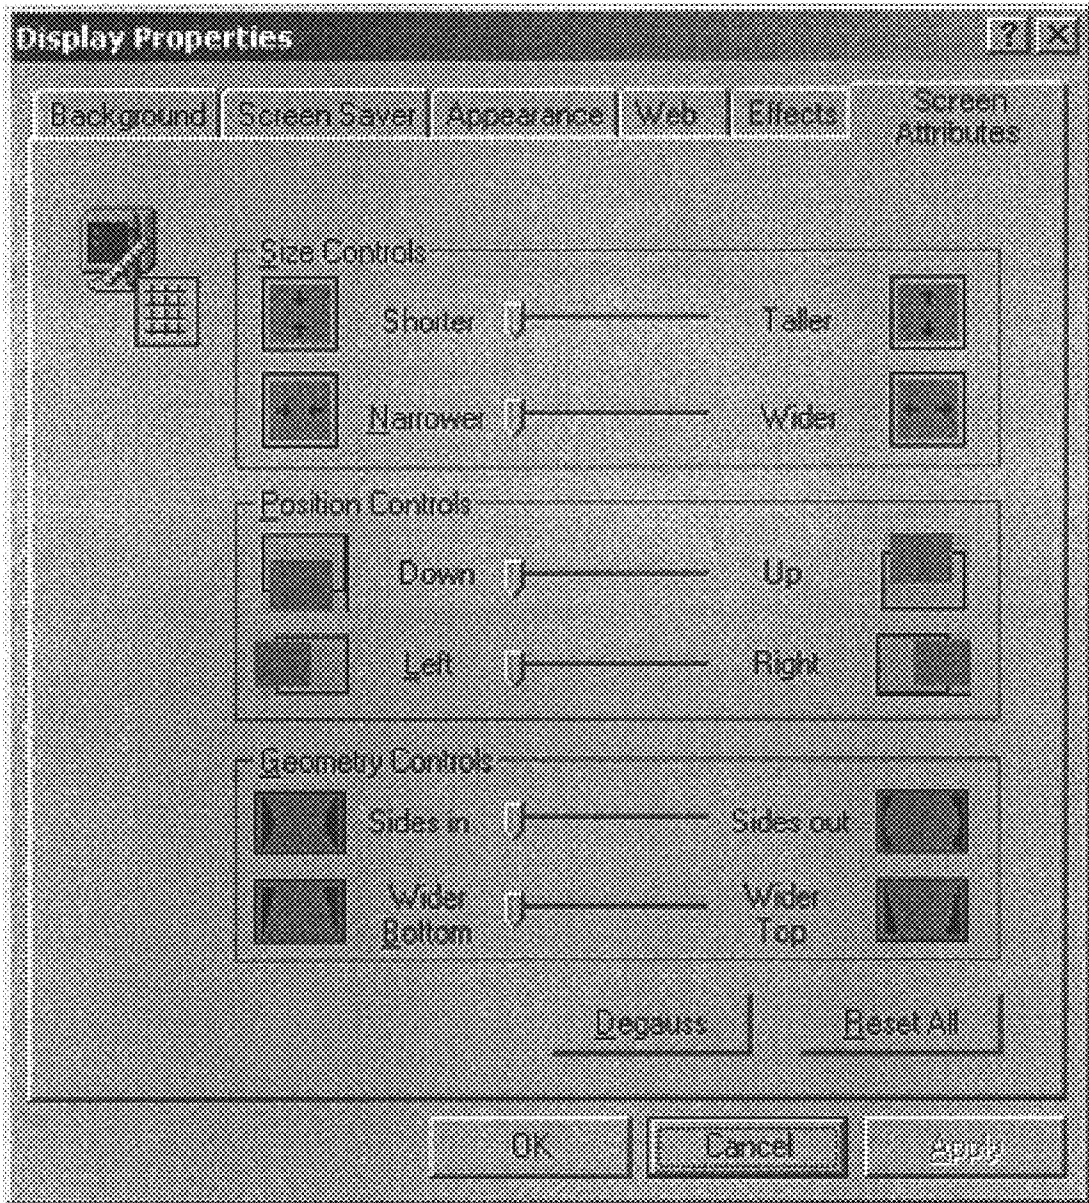

## USAGE OF MONITOR BEZEL BUTTONS TO CONTROL AND INDICATE MULTIMEDIA FUNCTIONS

This application claims the benefit of U.S. Provisional Application No. 60/049,979 entitled "BEZEL BUTTON FUNCTIONS," filed Jun. 11, 1997.

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The invention relates to indicating power status of a host computer system and a monitor with light emitting diodes mounted on the monitor, and more particularly to communicating power status of the host computer system over a universal serial bus.

#### 2. Description of the Related Art

As computer systems become more complex there has been an ever increasing effort to simplify the operation of the computer system. Early computers were difficult to use and understand. Typically, the computer was controlled with memorized keystrokes and command sequences. If the keystrokes were not memorized, the user was left with no alternative but to thumb through pages of documentation to find the elusive command.

Over time, the keyboards were enhanced to include function and control keys. However, the addition of keys to the original keyboard had certain drawbacks, such as additional confusion and a lack of consistency in their use. For many computer users, memorizing and typing in commands to the computer via the keyboard is awkward and complicated. Because of this, alternate data input devices to the keyboard have been developed.

One of the most popular of these alternate data input devices is a mouse. To maximize the usefulness of the mouse and to simplify entry of commands into a computer, a graphical operating system has been developed by Microsoft Corporation and others. By using the mouse, the user can move a pointer across the screen to select functional screen elements, such as a pull down menu, icon or button. However, as computer systems, operating systems and software applications have become increasingly powerful, many more menus, icons and buttons are available for selection by the user. Operating systems and software applications may require a user to navigate many "levels" of pull down menus or icons before reaching the desired function or command. Under these circumstances, instead of simplifying the entry of commands to the computers, the graphical user interface sometimes adds complexity and confusion. Thus, there is still a need for some input method or apparatus that increases "user friendliness" by reducing operator confusion when performing or executing certain system functions.

The computer industry is continually striving to provide additional computer enhancements to entice computer novices to purchase a computer system. Despite the near universal presence of the computer in the office environment, many people still are uncomfortable with computers and are reluctant to purchase or upgrade a home computer. Therefore, it is important for computer designers to add new features in a cost effective manner to new computer products, while at the same time giving the user a feeling of familiarity and comfort. For example, a CD-ROM drive in a modern computer often doubles as an audio CD player. A computer may also double as a VCR, television or a telephone answering machine. Other roles for the computer will inevitably develop. While the user may be familiar with the operation of these devices, the benefit of adding these

functions into the computer is often undermined because the average user may be unable or unwilling to access the menus or controls to operate these enhanced features. For instance, to use the CD-ROM player as an audio CD player, a user is required to proceed with the mouse through multiple levels of icons or pull-down menus before a CD is loaded and ready to play. The user must then use the mouse to select "play music" from a menu or screen before music is played. Therefore, as the array of options increases, users will be faced with increasingly complex graphics user interfaces unless another solution is found.

One approach to solving the problem has been disclosed in U.S. patent application Ser. No. 08/846,333 entitled "Computer Interface With Hardwire Button Array," filed on Apr. 30, 1997 and assigned to Compaq Computer Corporation. That application discloses a set of button switches, referred to as a button array, mounted to the top of a mini-tower computer system. Each button in the array provides a particular control function, such as controlling the playback of CD's, answering telephone calls, and other desired system functions. To identify the functions controlled by the buttons, each button is labeled with alphanumeric characters or icons representing the function associated with the button. Some buttons also have a light emitting diode (LED) associated with it to indicate status.

Although using a button array is an effective solution to the problem, being able to easily access the buttons sometimes may be difficult if the mini-tower is not within reach. Without being able to easily access the button array, the user may be discouraged from using the buttons. Furthermore, if status information is presented with an LED but the mini-tower is not within a convenient viewing range, the status information goes unappreciated.

Another approach to solving the problem has been disclosed in U.S. patent application Ser. No. 08/667,582, entitled "Controlling Multimedia Aspects of a Computer," filed on Jul. 12, 1996 and assigned to Compaq Computer Corporation. That application discloses a monitor having a volume control knob on its front control panel. This, of course, is a hardware alternative to the software solution offered by the operating system which requires a mouse. Embedded within the monitor is a microcontroller for sensing rotation of the volume control knob and communicating the movement back to a host computer. A proprietary interface was developed between the monitor and the computer system. A signal is sent directly to an audio chip over a pair of spare wires in a conventional video graphics array (VGA) cable.

Although this is an outstanding concept, the design incurred a noticeable delay from the actuation of the volume knob to the audible response of the system due to a 40 ms delay requirement of the audio chip. This caused the audio system to respond slowly and unpredictably. Additionally, the method is not easily transportable to other computer systems due to the proprietary nature of the solution.

Yet another problem exists with respect to digital controls on the monitor. Typically, there are several dedicated buttons on the bezel of the monitor for controlling such screen functions as horizontal and vertical size and position, color contrast and brightness. In an effort to reduce costs, the dedicated buttons were replaced with multifunction buttons which allowed the user to select one of the functions to adjust from an on screen display (OSD) menu provided by a controller in the monitor. However, the menuing system was text based and cumbersome. Additionally, a special controller was required in the monitor to provide the on

screen display which added to the cost. Therefore, it was desirable to provide a better user interface to monitor functions.

#### SUMMARY OF THE INVENTION

A computer system according to the present invention includes a monitor and a base system having a processor. The monitor includes a front bezel having controls and light emitting diodes (LEDs) for indicating status. The monitor is connectable to the base system by a universal serial bus (USB). The USB permits bidirectional communication between the monitor and the base system. Some controls, such as CD-ROM play, next track previous track pause and stop commands are push buttons which supply commands to the base system. Other controls initiate a process which causes information to be supplied to the monitor.

The monitor includes a monitor controller for adjusting monitor attributes according to user's wishes. The monitor also includes a USB controller for communicating with the base system.

An on-screen display (OSD) button on the monitor causes an application to be launched on the base system for controlling monitor attributes. The application is conveniently operated under the Windows operating system with a mouse. Before the application is displayed on the monitor, the base system requests the monitor to supply current monitor attributes maintained by the monitor controller. After the current attributes have been displayed and adjusted, the base system sends the new attributes to the monitor via the USB. The USB controller on the monitor receives the adjustments and sends them to the monitor controller.

An audio dial operates as a volume, bass and treble control. One of the bezel buttons controls which function the audio dial is adjusting. When the audio dial is operated, data sent to the base system over the USB causes three bars (volume, bass and treble) to be displayed on the monitor for making the adjustment. As the bezel button toggles the function of the audio dial, the bar changes color to indicate which function is selected.

Other bezel buttons have specific or general purpose functions. Examples of specific functions are, CD play, start stop, pause, eject, and rewind, telephony functions, and sleep/awake modes.

A further enhancement results from the bidirectional communication between the monitor and base system. The power status of the base system and monitor is represented in a unique MOON and SUN shaped LEDs. Additionally, one of the bezel buttons is dedicated to moving the computer system in and out of sleep mode.

As an extension of this technology, a telephone message indicator light can also blink on a monitor that is connected to the base system via a universal serial bus (USB). In this implementation, when the base system is put into sleep mode, it includes a USB controller chip which is itself powered down, thus saving power. In this mode, no communications can occur over the universal serial bus. Instead of messages being passed over the USB, according to the invention, a controller is implemented within the monitor itself which remains powered by the monitor power. This controller continues to blink a light on the monitor itself to indicate that a message is available, or otherwise leave the light off if a message is not. The controller is preferably controlled by software downloaded from the base system or by firmware embedded within the controller or within a flash ROM. If a telephone call were to come into the base system,

the base system would come out of sleep mode, answer the call, record the message, and send a message over the USB to indicate that the message available light should be blinked by the controller within the monitor.

#### BRIEF DESCRIPTION OF THE DRAWINGS

A better understanding of the present invention can be obtained when the following detailed description of the preferred embodiment is considered in conjunction with the following drawings, in which:

FIG. 1 is a block diagram illustrating a computer system C according to the preferred embodiment;

FIG. 2 is a front view of a monitor M according to the preferred embodiment;

FIG. 3 is a schematic diagram of certain circuitry of the monitor 102 according to the preferred embodiment;

FIG. 4 is a more detailed block diagram of the USB hub/peripheral controller and the bezel circuitry of FIG. 3;

FIG. 5 is a block diagram of a number of hardware and software layers of the present invention according to the preferred embodiment; and

FIG. 6 is a screen shot of an on-screen display applet of the invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The following disclosure is hereby incorporated by reference:

U.S. Provisional Application Serial No. 60/049,979 entitled "Bezel Button Functions," by Valiuddin Ali, William W. Diehl, Henry D'Souza, Gokalp Bayramoglu and Gary C. Welch, filed Jun. 11, 1997.

Turning now to FIG. 1, a computer system C suitable for an embodiment of the present invention is shown. The computer system C is comprised of a base system B and a monitor M 102. A desktop style computer system is illustrated although the present invention works equally as well on servers and other types of computer systems. The base system B includes a processor 100, such as a Intel Pentium or Pentium II processor and other support circuitry. The monitor 102 is a 15" or 17" cathode ray tube (CRT) style monitor having a pair of audio speakers 104 and a front bezel 106. Included with the monitor 102 are buttons and light emitting diodes (LEDs) on the front bezel 106. The buttons provide control to the processor 100 while the LEDs are responsive to the processor 100. Communication between the buttons, LEDs and processor 100 is over a universal serial bus (USB). Although the preferred embodiment is a CRT monitor, the principles disclosed herein are equally applicable to other types of monitors, such as flat screen monitors. It is also noted that other devices besides monitors can utilize the present invention.

Coupled to the processor 100 in the base system B is a memory/PCI/cache controller 108, and optionally, a level 2 cache 110. The mnemonic "PCI" stands for Peripheral Component Interconnect which is a well known computer bus. The memory/PCI/cache controller 108 forms a host-to-PCI bridge and provides the second level cache control and a full function 64-bit data path to a main memory 112. The memory/PCI/cache controller 108 integrates cache and main memory control functions and provides bus control to transfers between the processor 100, cache 110, main memory 112, and a PCI bus 114. An example of the memory/PCI/cache controller 108 is an Intel 82439TX system controller.

Also coupled to the PCI bus **114** are one or more PCI slots **116**, a PCI/ISA bridge **118** and a graphics controller **120**. The mnemonic "ISA" stands for Industry Standard Architecture. The PCI/ISA bridge **118** is a multifunction PCI device implementing a PCI-to-ISA bridge function, a PCI intelligent disk electronics (IDE) function, a Universal Serial Bus (USB) host/hub function, and an enhanced power management function. Coupled to the PCI/ISA bridge **118** are a pair of USB connectors **122** and **124** which provide connectivity to a universal serial bus **126**; a pair of IDE connectors **128** and **130** for connecting with a hard disk drive **132** and a compact disk read only memory (CD-ROM) **134**; and an ISA bus **136**. One example of the PCI/ISA bridge **118** is an Intel 82371AB PCI-to-ISA IDE accelerator.

The graphics controller **120** is further coupled and supported by a video frame memory **138** and an analog-to-digital converter **140**, such as a Brooktree BT827, for receiving composite video via a standard RCA (Radio Corporation of America) jack **146**. Graphics data is transmitted to the monitor **102** through a conventional video graphics array (VGA) connector **142**. Additionally, the graphics controller **120** supports a Video Electronic Standards Association (VESA) connector **144** for multimedia applications. In one embodiment of the computer system C a 3D graphics controller, such as a VirgeGX multimedia accelerator made by S3 Corporation, is utilized and in another embodiment a 2 dimensional graphics controller, such as a Trio64V2 multimedia accelerator made by S3 Corporation, is utilized.

The ISA bus **136** is further coupled to one or more ISA slots **148**, an input/output (I/O) controller **150** and an audio controller **152**. The I/O controller **150** incorporates a keyboard controller which is connectable to a keyboard **154** and a mouse **156** through PS/2 style connectors **158** and **160** respectively; a floppy disk controller which is connected to a floppy disk drive **162**; two 16C550 compatible universal asynchronous receiver/transmitter (UARTs) which are connected to a pair of serial port connectors **164**; and one multi-mode parallel port which is connected to a parallel port connector **166**. One example of the I/O controller is an FDC37C685 made by Standard Microsystems Corporation. It is also contemplated that the keyboard **154** could be connected to the base system B via the USB **126** instead of connecting directly to the keyboard interface **158**. In another variant, a USB keyboard **154** could include a USB hub to connecting with a USB mouse.

The audio controller **152** is a single mixed-signal controller that provides 16-bit stereo sound and frequency modulation a (FM) music synthesis. It includes an embedded microprocessor, a 20-voice FM music synthesizer, a 16-bit stereo wave coder/decoder (CODEC), a 16-bit stereo music digital-to-analog (DAC), a hardware master volume control, serial port, dual game port, and supports an external wavetable music synthesizer. The audio controller **152** has six I/O lines: a joystick interface **168** for connecting to a joystick **170**; a microphone interface **172** for connecting to a microphone **174**; an audio input line **176**; an audio output line **178**; a CD-ROM line (not shown) for receiving audio from the CD-ROM **134**; and a speaker line **180** for connecting with the monitor speakers **104**, or alternatively, a set of stand-alone speakers **182**. The audio controller **152** further couples to a tone generator **184**. One example of the audio controller **152** is an ES 1887 AudioDrive made by ESS Technology, Inc.

The universal serial bus **126** is a peripheral bus standard developed by PC and telecom industry leaders that allows plug and play of computer peripherals outside the base

system B, eliminating the need to install cards into the PCI slots **116** or ISA slots **148** and reconfigure the computer system C. The USB **126** allows computer peripherals to be automatically configured as soon as they are physically attached—without the need to reboot or run setup. The USB **126** also allow multiple devices, up to 127, to run simultaneously on the computer system C.

The USB **126** uses a "tiered star topology" which means that some USB devices—called USB "hubs"—can serve as connection ports for other USB peripherals—also called "functions". With peripherals such as the monitor **102** and keyboard **154** acting as additional plug-in sites, or hubs, only one USB device needs to be plugged into the computer system C. Other devices can then be plugged into the hub. In the preferred embodiment, the monitor **102** includes a USB hub having one upstream port for plugging directly into the base system B and four downstream ports for additional functions explained below. For further details on the Universal Serial Bus, please refer to the Universal Serial Bus Specification available on the World Wide Web at "<http://www.usb.org>," or from Intel Corporation, which is hereby incorporated by reference.

Referring now to FIG. 2, there is illustrated a front view of the monitor **102** in greater detail. Other views are not necessary for a complete understanding of the invention. The monitor **102** comprises a CRT **200** and its related circuitry encased in a rigid enclosure **204**, made of plastic or the like, which forms a bezel **206** around a face of the CRT **200**. Integral with the enclosure on opposing sides of the CRT **200** are speakers **104a** and **104b**. The speakers **104a-b** receive an audio signal from the base system B via the analog speaker line **180**. It is contemplated that the speakers could alternatively receive audio data via the USB **126**.

On a front lower portion of the bezel **206** are a number of buttons **208** with corresponding LEDs **210**. On a left hand side are four buttons for controlling playback of the CD-ROM **134**, including: a play button, a next track button, a previous track button, and a stop button. Each button has a backlit icon associated therewith for ease of identification. By default, the icons are lit. While the button is depressed, the icon **210** is not lit. On a right side are four additional buttons for other control functions. One button is user programmable to launch (load or execute) a favorite software application; another button is preprogrammed to launch an internet browser; a third button is preprogrammed to mute the speakers; and a fourth button is predefined to alternate between volume, bass and treble audio control. Another button **218** is used to provide an indication to the processor **100** that an on-screen display (OSD) should be displayed for configuring the monitor attributes, such as horizontal and vertical position; horizontal and vertical size; and pin cushion and trapezoidal compensations. It is contemplated that contrast and a brightness adjustments could be made with the on-screen display also, however, the preferred embodiment uses conventional analog dials for these controls. The buttons **208** are coupled to a USB hub inside the monitor **102** for communicating their status with the processor **100**.

In addition to the buttons and LEDs, there is a audio control **216** on the front bezel for controlling the volume/bass/treble of the audio produced by the audio controller **152**. The audio control **216** utilizes a shaft encoder. A single one of the buttons **208** is operable to cause an onscreen display toggle between volume, bass and treble control. Not shown are conventional analog control dials for controlling monitor contrast and brightness. It is understood that other

controls and LEDs could be utilized without changing the spirit of the invention. The function of the buttons is described in Table I.

TABLE I

| BUTTON                       | DESCRIPTION  |
|------------------------------|--|
| CD Play/Pause button 208     | When this button is pressed a command is sent to base system B over the USB 126 to start the play function.<br>Once the play function has been invoked, the function of the button toggles to pause.   |
| CD Stop button 208           | When this button is pressed a command is sent to base system B over the USB 126 to start the stop function.  |
| CD Next Track button 208     | When this button is pressed a command is sent to base system B over the USB 126 to start the next track function.  |
| CD Previous Track button 208 | When this button is pressed a command is sent to base system B over the USB 126 to start the previous track function.  |
| User configurable button 208 | When this button is pressed a command is sent to base system B over the USB 126 to start the user configured function.   |
| Internet button 208          | When this button is pressed a command is sent to base system B over the USB 126 to start the Internet function.  |
| Mute button 208              | When this button is pressed a command is sent to base system B over the USB 126 to mute the sound. Once the mute function has been invoked, the function of the button toggles to enable the sound.  |
| Audio button 208             | Pushing this button sequentially effectively changes the function of the volume shaft encoder. The default function of the shaft encoder is volume control. There is a fixed time-out period of seven (7) seconds. The time-out is counted after the button is pressed. The time-out count is restarted every time the audio button is pressed or the shaft encoder is turned. After the time-out period, the function of the shaft encoder automatically reverts to volume control. Pushing the button once changes the function of the shaft encoder to Bass control, pushing the button a second time (before time-out) changes the function of the shaft encoder to treble control. Pushing the button a third time (before time-out) changes the function of the shaft encoder back to volume control.<br>Turning the shaft encoder causes the module to send signals to the base system B over the USB 126 to adjust the audio control corresponding to the current function of the shaft encoder. In all cases, turning the shaft encoder clockwise causes an increase in the control and turning the shaft encoder counter-clockwise causes a decrease in the control. The function of the shaft encoder is made clear to the user by visual feedback via the on screen display (OSD).<br>Normally there is no OSD and the (default) function of the shaft encoder is volume control. Turning the shaft encoder under this basic condition causes the OSD to display a volume control pictogram. Pressing the Audio button one time causes the OSD to display a bass control pictogram. This condition lasts for the time-out period. After the time-out period elapses the OSD clears. Pressing the Audio button a second time before a time-out occurs causes the OSD to display a treble control pictogram. This condition lasts for the time-out period. After the time-out period elapses the OSD clears.<br>Pressing the Audio button a third time before a time-out occurs, causes the OSD to clear. At this (default) point, if the shaft encoder is adjusted the OSD will display a volume control pictogram. |

TABLE I-continued

| BUTTON             | DESCRIPTION   |
|--------------------|---|
| 5 Sleep button 212 | When this button is pressed a command is sent to base system B over the USB 126 to place the computer system C into sleep. Preferably, this button is pressed again to wake-up the computer C. Preferably, no other device can wake up the system.  |
| 10 OSD button 218  | When this button is pressed, a command is sent to the base system B over the USB 126 indicating that the button 218 was depressed. Thereafter, a mouse controlled applet (MONITOR.CPL) is launched for monitor control. Based upon mouse selected functions, corresponding commands are sent to the monitor 102 from the base system B over the USB 126. These commands cause the monitor's microcontroller to execute the desired monitor control commands. The applet remembers the previous state of monitor controls upon power on. |

In addition to the above described buttons and LEDs, there is another centrally located button **212** for placing the computer system C into a sleep mode to conserve energy. There are two LEDs associated with the sleep button **212** for indicating the state of the computer system C. One of the icons is a "SUN" and another is a "MOON." Table II is a state table for the illumination of the LEDs.

TABLE II

|  | SUN | MOON | LEDs 210 |
|--|-----|------|----------|
| 30 Normal Operation                            | ON  | OFF  | ON       |
| Display Power Management System (DPMS) Standby | ON  | OFF  | ON       |
| 35 DPMS Suspend                                | OFF | ON   | ON       |
| Sleep  | OFF | ON   | OFF      |
| Base System B power off                        | OFF | OFF  | OFF      |

The DPMS standby and suspend modes are controlled by the graphics controller **120**. The standby mode is entered when the graphics controller **120** ceases providing a horizontal synch signal to the monitor **102**. The suspend mode is entered when the graphics controller **120** ceases providing a vertical synch signal to the monitor **102**. Both of these events cause the monitor **102** to enter a low power mode and blank the screen. The system can awake from suspend or standby modes in response to any user input. Sleep mode is entered by one of at least two methods: 1) when the processor **100** detects a certain period of inactivity, and 2) when the sleep button **212** is depressed. In sleep mode, the screen is blanked and the processor **100** is stopped to conserve power. The computer system C can awake from sleep mode. All LEDs **210**, including the "SUN" and "MOON" icons, are off when the base system B is powered off. Thus, the "SUN," "MOON" and LED **210** icons are responsive to commands received from the processor **100** via the USB **126**.

Referring now to FIG. 3, there is illustrated a schematic diagram of certain circuitry of the monitor **102** according to the preferred embodiment. A USB hub/peripheral controller **300**, such as an Intel 83930HX Universal Serial Bus Microcontroller, is connected to a monitor microcontroller **302**, such as an Motorola MC68HCP058. The USB hub/peripheral controller **300** includes a USB hub and USB embedded function capabilities, as well as a MCS **251**

microcontroller. For more information on the USB hub/peripheral controller **300**, please refer to specification No. 272928-003, entitled "8x930Hx Universal Serial Bus Hub Peripheral Controller," and specification No. 274929-001, entitled "8x930Ax, 8x930Hx Universal Serial Bus Microcontroller User's Manual" published by Intel Corporation and available on the World Wide Web at "http://developer.intel.com/design/usb," both of which are hereby incorporated by reference.

The monitor microcontroller **302** is operable to control various monitor attributes, such as horizontal and vertical position; horizontal and vertical size; and pin cushion and trapezoidal compensations. The monitor microcontroller **302** is connected to a conventional video processing system **304** of the monitor **102**. The video processing system **304** receives standard analog RGB (red, green blue) input from the VGA connector **142** when coupled to the base system B. In the preferred embodiment, contrast and brightness controls are provided to the video processing system **304** from two standard voltage potentiometers **306** and **308**. Alternatively, the contrast and brightness control information could be provided from the monitor microcontroller **302**. After processing the RGB input according to the monitor attributes, the video processing system **304** provides a video output (VO) signal to the CRT **200** which is controlled by a set of deflection control signals (DEF).

The USB hub/peripheral controller **300** is operable to provide a communications link between the base system B and the monitor **102** over the USB **126**. More particularly, the USB hub/peripheral controller **300** is operable to receive bezel button signals for passing to the base system B and operable to receive processor **100** sleep information from the base system B for controlling the state LEDs **214**. Additionally, the USB hub/peripheral controller **300** receives the monitor attribute information from the base system B via the USB **126** for passing to the monitor microcontroller **302**. Because the bezel buttons **208** and LEDs **210** are under control of the hub/peripheral controller **300**, even though the processor **100** is inoperable or asleep the bezel buttons **208** and LEDs **210** are operable. Hence, an LED **210** could be blinked by the hub/peripheral controller **300** while the processor **100** is asleep. This is useful, for example, where a sustained blinking LED indication is needed, such as for indicating that a fax or message has been received.

An I<sup>2</sup>C (Inter Integrated Circuit, pronounced "eye squared see") bus **310** connects the monitor controller **302** to the USB hub/peripheral controller **300**. The I<sub>2</sub>C bus **310** is a two-wire synchronous, serial interface which allows communication between intelligent IC devices. For more general information on the I<sup>2</sup>C bus **310**, please refer to the I<sup>2</sup>C Bus Specification available from Philips Semiconductors and hereby incorporated by reference. For additional information on the implementation of the I<sup>2</sup>C bus **310** on the USB hub/peripheral controller **300**, please refer to Application Note AP476 entitled "How to Implement I<sup>2</sup>C Serial Communication Using Intel MCS® 51 Microcontrollers" available from Intel Corporation and hereby incorporated by reference.

The monitor microcontroller **302** also provides a MONITOR SLEEP signal **312** to the USB hub/peripheral controller **300** when the monitor microcontroller **302** places the monitor **102** into a low power mode (DPMS suspend mode). The USB hub/peripheral controller **300** is responsive to the MONITOR SLEEP signal **312** to control the "SUN" and "MOON" LEDs **214** in accordance with Table II

Referring now to FIG. 4, there is illustrated a detailed block diagram of the USB hub/peripheral controller **300** and

the bezel circuitry **206**. The USB hub/peripheral controller **300** includes an MCS® 51 compatible microcontroller architecture including four 8-bit I/O ports—two of which are utilized by the present invention. A port1 **314** is connected to two 8-bit selector/multiplexors **316** and **318**. Each selector **316** and **318** receives three select signals from port1 **314**. Each selector **316** and **318** provides a data output to port1 **314**.

Selector **316** receives input from the eight bezel buttons **208**. The bezel buttons **208** are comprised of a normally open switch. One end of the switch **208** is connected to a resistor R1, an anode end of a light emitting diode (LED) **210** and a data input of the selector **316**. An opposite end of the switch **208** is connected to a cathode end of the LED **210** and a current limiting resistor R2. The switch **208**, resistor R1 and LED **210** form a single bezel button user interface **320**. Although it is not shown, each data input of the selector **316** has associated with it a bezel button user interface **320**. The eight bezel button user interfaces include: four buttons for controlling playback of the CD-ROM **134**, a fifth button that is user programmable to launch (load or execute) a favorite software application; a sixth button that is preprogrammed to launch an internet browser, a seventh button that is preprogrammed to mute the speakers; and an eighth button that is predefined to alternate between bass and treble audio control.

Selector **318** receives input from two switches: the OSD switch **218**, and the SLEEP switch **212**. One end of the OSD switch **218** is connected to a resistor R3 and a data input of the selector **318**. An opposite end of the OSD switch **218** is connected to ground. One end of the SLEEP switch **212** is connected to a resistor R4 and a data input of the selector **318**. An opposite end of the SLEEP switch **212** is connected to ground.

The USB hub/peripheral controller **300** is operable to write data to port1 **314** to cause a selection to be made at the selectors **316** and **318**. While the selection is made, each selector **316** and **318** provides data at a Y output to the port1 **314** from one of its eight data inputs. After the data is read, a different selection is made. This is repeated so that all ten switches **208**, **218** and **212** are continuously monitored. Port1 **314** also reads the state of the MONITOR SLEEP signal **312**.

A port3 **320** provides a clock and data line for the I<sup>2</sup>C bus **310** interface. Port3 **320** also controls the "SUN" and "MOON" LEDs **214** via a driver **324**. One output of the port3 **320** supplies a COMMON signal **322** to turn on and off the IFDs **210**. Normally, the LEDs **210** are illuminated, except when a bezel button **208** is depressed, and the COMMON signal **322** is forced low. However, if the COMMON signal **322** is forced high, the LEDs **210** are turned off.

The port3 **320** also receives up/down pulses from an audio control shaft encoder **216**. Recall that the audio control is operable to control volume, bass and treble based on the audio button **208**. Rotating the audio control **216** to the right (clockwise) causes a command to be sent to the processor **100** over the USB **126** to increase the current audio function, rotating the volume control **216** to the left (counterclockwise) causes a command to be sent to the processor **100** over the USB **126** to decrease the current audio function.

Now referring to FIG. 5, there is illustrated a block diagram of a number of hardware and software layers of the present invention according to the preferred embodiment. The present embodiment of the invention utilizes a Windows95 operating system running on x86 compatible processor. However, since much of the device driver software is

written according to a Microsoft WIN32 Driver Model (WDM), those drivers are also compatible with a Windows NT operating system (and the Microsoft Windows "Memphis" OS). Of course, the principles disclosed herein could be utilized to develop drivers for other operating systems, such as OS/2 and UNIX; and processors, such as a Digital Equipment Corporation (DEC) Alpha, a Silicon Graphic MIPS processor, or an International Business Machines (IBM) PowerPC.

The PCI/ISA Bridge **118** (USB Host controller) is shown coupled to the USB hub/peripheral controller **300** via the Universal Serial Bus **126** as illustrated in FIGS. **3** and **4**. The remaining hardware connected to the USB hub/peripheral controller **300** has been described above and therefore its description is not repeated here. It is shown for a better understanding of the data flow.

There is software operating at a ring **3** layer and a ring **0** layer. Ring **3** is generally used for user applications while ring **0** is generally used by system software since there is much more protection for ring **0** software. At ring **3** is a MONITOR.CPL applet **400**, a MONITOR.DLL dynamic link library **402**, and a BEZEL.DLL dynamic link library **404**.

The MONITOR.CPL module **400** is a Windows95 control panel applet used to set screen attributes. A screen snapshot of the user interface presented by the MONITOR.CPL is illustrated in FIG. **6**. When the OSD button **218** is pressed, a command is sent to the processor **100** over the USB **126** indicating that the button **218** was depressed causing the MONITOR.DLL **402** to load MONITOR.CPL **400**. The MONITOR.DLL **402** is a dynamic link library that implements the monitor interface to applications. Applications, such as MONITOR.CPL, can use the MONITOR.DLL **402** to read and write attributes to the monitor device. In turn, the MONITOR.DLL **402** reads and writes the monitor **102** screen attributes via a USB monitor device driver (CPQ\_MON.SYS) **406**.

The CPQ\_MON.SYS **406** is a ring **0** USB device driver having a ring **3** interface. The MONITOR.DLL **402** uses a Windows DeviceIoControl function to communicate with the CPQ\_MON.SYS driver **406** at ring **0**. There are a number of other ring **0** modules, including: a bezel board driver (CPQ\_BZL.SYS) **408**, a legacy bezel board driver (BEZEL.VXD) **410**, and an audio driver (CPQ\_AUD.SYS) **412**. These ring **0** modules further communicate with a single USB device driver (CPQ\_USB.SYS) **414**. Because all the functions available through the monitor bezel **206** are treated by the USB **126** as a single USB device, a single device driver (CPQ\_USB.SYS) is utilized. When the USB **126** identifies the monitor **102** connected, the CPQ\_USB.SYS **414** is loaded. In turn, CPQ\_USB.SYS **414** will load CPQ\_MON.SYS **406**, CPQ\_BZL.SYS **408**, and CPQ\_AUD.SYS **412**, the monitor, bezel board, and audio drivers respectively. This architecture allows these three drivers to sit parallel to each other rather than stacked on top of each other if each was treated as a separate USB function.

The CPQ\_USB.SYS driver **414** simply operates to pass USB commands from the higher level drivers to a USB hub driver (USBHUB.SYS) **416**. The higher level drivers (CPQ\_MON.SYS **406**, CPQ\_BZL.SYS **408**, and CPQ\_AUD.SYS **412**) use Windows ReadFile and WriteFile functions to communicate with the USBHUB.SYS **416** (LSB driver stack). The USBHUB.SYS driver **416** is a standard hub controller driver (preferably provided by Microsoft) loaded when a USB class driver (USB.D.SYS) **418** enumerates the root hub built into the host controller **118**. The

USBHUB.SYS driver **416** communicates with the USB.D.SYS **418** (preferably provided by Microsoft) to form the main USB driver interface. The USB.D.SYS **418** is a USB class driver for supporting the USB **126** in the Windows95 OS which is provided by Microsoft Corporation as part of OSR 2.1.

In turn, the USB.D.SYS **418** communicates with a Universal Host Controller Driver (UHCD.SYS). Together, the USBHUB.SYS **416**, USB.D.SYS **418** and UHCD.SYS **420** drivers form what is known as a USB driver stack. As an alternative to the UHCD.SYS driver **420** which is written in accordance with a Universal Host Controller Interface Specification (UHCI), the host controller **118** could operate with an OpenHCI driver. For more details on the Open Host Controller Interface Specification for USB driver, please refer to the OpenHCI Specification published by Compaq Computer Corporation, which is hereby incorporated by reference. For more details on the Universal Host Controller Interface Specification, please refer to the Universal HCI Design Guide published by Intel Corporation and available on the World Wide Web at "http://developer.intel.com/design/usb," which is hereby incorporated by reference.

The UHCD.SYS **420** (preferably provided by Microsoft) provides a software layer between the host controller **118** and the USB.D.SYS **418**. The UHCD.SYS **420** interprets requests from the USB.D.SYS **418** and builds frame list, transfer descriptor, queue, head, and data buffer data structures for the host controller **118**. The data structures are built in memory **112** and contain all necessary information to provide end-to-end communication between CPQ\_MON.SYS, CPQ\_BZL.SYS, and CPQ\_AUD.SYS and the hub/peripheral controller **300**.

Note that the CPQ\_BZL.SYS **408** and CPQ\_AUD.SYS **412** communicate with a bezel virtual device driver (BEZEL.VXD) **410** which communicates the bezel board dynamic link library (BEZEL.DLL) **404**. Instead of using a WIN32 Driver Model (WDM), the BEZEL.VXD **410** was utilized because it was stable code with a well defined ring **3** interface to trap and communicate bezel button information using non-maskable interrupts (NMI) callbacks from the basic input/output service (BIOS). A WDM module is contemplated, however.

The BEZEL.DLL **404** supports a number of multimedia applications **422**, such as a CD-ROM player, MIDI player and other applications requiring the bezel buttons **208**. When one of the applications is loaded, the application **422** loads the BEZEL.DLL **404** and dynamically grabs function pointers to obtain Windows handles and register the bezel buttons with the application **422**. This way, when bezel button events are passed to BEZEL.DLL **404** from USB **126**, BEZEL.DLL **404** can look up the application **422** registered to the bezel button **208** and distribute the event to the appropriate application **422**. In turn, the BEZEL.DLL **404** loads the BEZEL.VXD and registers with the BEZEL.VXD to obtain a Windows handle. The BEZEL.DLL **404** communicates with the BEZEL.VXD **410** with Windows DeviceIoControl functions. The BEZEL.VXD **410** communicates to the BEZEL.DLL **404** by posting Windows messages.

When BEZEL.VXD **410** is loaded, it looks for CPQ\_BZL.SYS **408** and CPQ\_AUD.SYS **412**. It performs a WriteFile to each WDM driver **408** and **412** to register with it and obtain a function pointer. In turn, CPQ\_BZL.SYS **408** and CPQ\_AUD.SYS maintain the pointer for reciprocal communication.

The foregoing disclosure and description of the invention are illustrative and explanatory thereof, and various changes

13

in the size, shape, materials, components, circuit elements, wiring connections and contacts, as well as in the details of the illustrated circuitry and construction and method of operation may be made without departing from the spirit of the invention.

What is claimed is:

1. A method of implementing bezel buttons to control a peripheral in a computer system incorporating a monitor, a processor, and a multimedia application, the monitor incorporating a monitor controller, bezel push buttons, and a display, the method comprising:

- determining a multimedia application is present in the computer system;
- responsive to determining the multimedia application is present, dynamically assigning functionality of the multimedia application to the bezel push buttons;
- receiving an activation from the bezel push buttons selectively repeating the steps of determining and dynamically assigning responsive to a user input; and
- responsive to receiving the activation, executing multimedia application code in the multimedia application associated with the functionality assigned to the bezel push buttons.

2. The method of claim 1, wherein the step of dynamically assigning functionality to the bezel push buttons includes obtaining window handles and registering the function to the bezel push buttons.

3. The method of claim 1, wherein the step of determining a multimedia application is present includes determining if a MIDI player is present.

4. The method of claim 1, wherein the step of determining multimedia application present includes determining if a CD-ROM player is present.

5. A system connectable to a monitor with bezel push buttons, the system for communicating with a multimedia application upon a bezel push button event, the system comprising:

- a microcontroller;
- multimedia application code, the multimedia application code, when executed, causing the microcontroller to perform the steps of:
  - determining a multimedia application is present in the computer system;
  - responsive to determining the multimedia application is present, dynamically assigning functionality of the multimedia application to the bezel push buttons;
  - receiving the activation from the bezel push buttons selectively repeating the steps of determining and dynamically assigning responsive to a user input; and

14

responsive to receiving the activation, executing multimedia application code in the multimedia application associated with the functionality assigned to the bezel push buttons.

6. The system of claim 5, wherein the step of dynamically assigning functionality to the bezel push buttons includes obtaining window handles and registering the function to the bezel push buttons.

7. The system of claim 5, wherein the step of determining a multimedia application is present includes determining if a MIDI player is present.

8. The system of claim 5, wherein the step of determining multimedia application present includes determining if a CD-ROM player is present.

9. A computer system for communicating with a multimedia application upon a bezel push button event, the computer system comprising:

- a microcontroller;
- a monitor coupled to the microcontroller, the monitor including bezel push buttons;
- a multimedia application coupled to the microcontroller; multimedia application code, the multimedia application code, when executed, causing the microcontroller to perform the steps of:
  - determining the multimedia application is present in the computer system;
  - responsive to determining the multimedia application is present, dynamically assigning functionality of the multimedia application to the bezel push buttons;
  - receiving the activation from the bezel push buttons selectively repeating the steps of determining and dynamically assigning responsive to a user input; and
  - responsive to receiving the activation, executing the multimedia application code in the multimedia application associated with the functionality assigned to the bezel push buttons.

10. The computer system of claim 9, wherein the step of dynamically assigning functionality to the bezel push buttons includes obtaining window handles and registering the function to the bezel push buttons.

11. The system of claim 9, wherein the step of determining the multimedia application is present includes determining if a MIDI player is present.

12. The system of claim 9, wherein the step of determining multimedia application present includes determining if a CD-ROM player is present.

\* \* \* \* \*