



ZebraNet™ Bridge Enterprise

User Guide



© 2006 ZIH Corp. The copyrights in this manual and the software and/or firmware in the label printer described therein are owned by ZIH Corp. Unauthorized reproduction of this manual or the software and/or firmware in the label printer may result in imprisonment of up to one year and fines of up to \$10,000 (17 U.S.C.506). Copyright violators may be subject to civil liability.

This product may contain ZPL[®], ZPL II[®], and ZebraLink[™] programs; Element Energy Equalizer[®] Circuit; E³[®]; and Monotype Imaging fonts. Software © ZIH Corp. All rights reserved worldwide.

ZebraLink and all product names and numbers are trademarks, and Zebra, the Zebra logo, ZPL, ZPL II, Element Energy Equalizer Circuit, and E³ Circuit are registered trademarks of ZIH Corp. All rights reserved worldwide.

All other brand names, product names, or trademarks belong to their respective holders. For additional trademark information, please see “Trademarks” on the product CD.

Proprietary Statement This manual contains proprietary information of Zebra Technologies Corporation and its subsidiaries (“Zebra Technologies”). It is intended solely for the information and use of parties operating and maintaining the equipment described herein. Such proprietary information may not be used, reproduced, or disclosed to any other parties for any other purpose without the express, written permission of Zebra Technologies.

Product Improvements Continuous improvement of products is a policy of Zebra Technologies. All specifications and designs are subject to change without notice.

Liability Disclaimer Zebra Technologies takes steps to ensure that its published Engineering specifications and manuals are correct; however, errors do occur. Zebra Technologies reserves the right to correct any such errors and disclaims liability resulting therefrom.

Limitation of Liability In no event shall Zebra Technologies or anyone else involved in the creation, production, or delivery of the accompanying product (including hardware and software) be liable for any damages whatsoever (including, without limitation, consequential damages including loss of business profits, business interruption, or loss of business information) arising out of the use of, the results of use of, or inability to use such product, even if Zebra Technologies has been advised of the possibility of such damages. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Contents



About This Document	v
Who Should Use This Document	vi
How This Document Is Organized	vi
Enterprise Edition	vi
Contacts	vii
Web Site	vii
The Americas	vii
Europe, Africa, Middle East, and India	vii
Asia Pacific	vii
Document Conventions	viii
Related Documents	x
1 • Introduction	1
Overview	2
Components	2
Menu and Toolbar Navigation	6
Supported Languages	7
Activate Product	8
Register Product	9
Feature Matrix	10
Requirements	13
Printer	13
Print Server	13

- 2 • Install 15**
 - System Requirements..... 16
 - Workstation 16
 - Operating System 16
 - Requirements for Cross-Network Communication 16
 - Installation 17
- 3 • Getting Started 21**
 - Overview..... 23
 - Search Group Window and Printer Discovery 23
 - Group Management Window 23
 - Resource Management Window 23
 - Profile Management Window 23
 - Task List Dialog Box 24
 - Multiple User Interface Configurations 24
 - Working with Mobile Printers 24
 - Working with Card Printers 25
 - Set System Preferences 26
 - Main Settings Tab 26
 - Printer Options Tab..... 29
 - Search Group Window and Printer Discovery 35
 - Default View 35
 - Before You Begin 35
 - Create a Local Broadcast Search Group 36
 - Create a Subnet Search Group 37
 - Create a Directed Broadcast Search Group 38
 - Create a Multicast Search Group 39
 - Create an IP Address Search Group 40
 - Gleaning 41
 - Group Management Window 42
 - Create a Group 42
 - Copy Search Groups 43
 - Copy Individual Printers to a Group 43
 - Add Printers 44
 - Sort Printers and Groups 48
 - Printer Preferences 49
 - Delete Printers/Groups 52
 - Resource Management Window 53
 - Types of Objects 53
 - Add Files 54
 - Scripts 54

Profile Management Window	55
Creating and Downloading Printer Profiles	55
Exporting and Importing Printer Profiles	56
Task List Dialog Box	58
Multiple User Interface Configurations	59
Save a Configuration	59
Open a Specific Configuration	60
4 • Printer Management	61
Change Settings	62
Change Printer Settings	62
Change Print Server Settings	63
Copy Configurations	64
Copy Printer Settings	64
Copy Print Server Settings	64
Copy Objects	65
Copy Alerts	65
Copy All	66
Copy Printer Configuration to a Group	67
Download (from Resource Management window)	68
Download Firmware to a Printer	68
Download Objects to a Printer	69
View and Edit Text Objects	70
Hard Actions	71
Reset the Printer to Factory Defaults	71
Reset the Print Server to Factory Defaults	71
Reset the Printer to Save Settings	71
Reset the Print Server to Save Settings	72
Print a Configuration Label	72
5 • Printer Alerts, Monitoring, and Troubleshooting	73
Printer and Print Server Alerts	74
Configuring Printer Alerts	74
View Printer and Print Server Alerts	75
Clear Alerts Log	76
Status Icons	77
Status Tab	77
Summary Tab	80
Visual Alerts	81
Default View	81
Before You Begin	81
Configure Visual Alerts Tab	81
Monitor Alerts with the Visual Alerts Tab	83

- Compare Printers 87
- Communications Window 88
- 6 • Tools 91**
 - Font Wizard 92
 - Import/Convert Fonts Tab 92
 - Link Font Tab 96
 - DAT Editor Tab 98
 - View Font 100
 - Launch Character Editor 102
 - Graphics Conversion Wizard 104
 - Wireless Setup Wizard 110
 - Before you begin. 110
 - Stationary ZebraNet Wireless Print Server Setup. 110
 - Mobile Wireless Setup 117
 - Copy Printer Wizard 121
- A • Menu and Toolbars 125**
 - Toolbar 126
 - Visual Alerts Icon 128
 - Menu Bar 129
- B • Frequently Asked Questions 131**
- C • Drag and Drop Defaults 135**
 - Default Drag and Drop Function 136
- Index 137**
- ZebraNet™ Bridge End User License Agreement 141**



About This Document

This section provides you with contact information, document structure and organization, and additional reference documents.

Contents

Who Should Use This Document	vi
How This Document Is Organized	vi
Contacts	vii
Document Conventions	viii
Related Documents	x

Who Should Use This Document

This ZebraNet Bridge Enterprise User Guide is intended for IS personnel and people who administer Zebra printers.

How This Document Is Organized

The ZebraNet Bridge Enterprise User Guide is set up as follows:

Section	Description
<i>Introduction on page 1</i>	This chapter provides a high-level overview of ZebraNet Bridge Enterprise.
<i>Install on page 15</i>	This chapter identifies the system requirements and walks you through the CD installation.
<i>Getting Started on page 21</i>	This chapter provides instructions on working with frequently used ZebraNet Bridge features. Instructions follow typical sequence of events when first using the application.
<i>Printer Management on page 61</i>	This chapter tells you how to use advanced features to manage printers in your network environment.
<i>Printer Alerts, Monitoring, and Troubleshooting on page 73</i>	There are several tools available to help you monitor and troubleshoot printers in your enterprise network. This chapter tells you how to use these advanced features to manage printers in your network environment.
<i>Tools on page 91</i>	This chapter describes the ease-of-use tools and wizards in ZebraNet Bridge.
<i>Menu and Toolbars on page 125</i>	This chapter describes ZebraNet Bridge menus and toolbar.
<i>Frequently Asked Questions on page 131</i>	This appendix provides you with frequently asked questions about ZebraNet Bridge.
<i>Drag and Drop Defaults on page 135</i>	The table in this appendix describes the default Drag and Drop actions enlisted by ZebraNet Bridge.

Enterprise Edition



The icon beside this text identifies features of the ZebraNet Bridge Enterprise licensed edition. These features are only available when you enable the application with a serial number key. Your value-added reseller can provide information about purchasing a licensed copy of ZebraNet Bridge Enterprise.

Contacts

You can contact Zebra Technologies at the following:

Web Site

<http://www.zebra.com>

Technical Support via the Internet is available 24 hours per day, 365 days per year. Go to <http://www.zebra.com/support>.

The Americas

Regional Headquarters	Technical Support	Customer Service Dept.
Zebra Technologies International, LLC 333 Corporate Woods Parkway Vernon Hills, Illinois 60061.3109 U.S.A T: +1 847 793 2600 Toll-free +1 800 423 0422 F: +1 847 913 8766	T: +1 847 913 2259 F: +1 847 913 2578 Hardware: hwtsamerica@zebra.com Software: swtsamerica@zebra.com	For printers, parts, media, and ribbon, please call your distributor, or contact us. T: +1 866 230 9494 E: VHCustServ@zebra.com

Europe, Africa, Middle East, and India

Regional Headquarters	Technical Support	Internal Sales Dept.
Zebra Technologies Europe Limited Zebra House The Valley Centre, Gordon Road High Wycombe Buckinghamshire HP13 6EQ, UK T: +44 (0)1494 472872 F: +44 (0) 1494 450103	T: +44 (0) 1494 768298 F: +44 (0) 1494 768210 Germany: Tsgermany@zebra.com France: Tsfrance@zebra.com Spain/Portugal: Tsspain@zebra.com All other areas: Tseurope@zebra.com	For printers, parts, media, and ribbon, please call your distributor, or contact us. T: +44 (0) 1494 768316 F: +44 (0) 1494 768244 E: mseurope@zebra.com

Asia Pacific

Regional Headquarters	Technical Support	Customer Service
Zebra Technologies Asia Pacific, LLC 16 New Industrial Road #05-03 Hudson TechnoCentre Singapore 536204 T: +65 6858 0722 F: +65 6885 0838	T: +65 6858 0722 F: +65 6885 0838 E: tsasiapacific@zebra.com	For printers, parts, media, and ribbon, please call your distributor, or contact us. T: +65 6858 0722 F: +65 6885 0837

Document Conventions

The following conventions are used throughout this document to convey certain information.

Alternate Color (online only) Cross-references contain hot links to other sections in this guide. If you are viewing this guide online in .pdf format, you can click the cross-reference ([blue text](#)) to jump directly to its location.

Command Line Examples Command line examples appear in Courier New font. For example, type `ZTools` to get to the Post-Install scripts in the `bin` directory.

Files and Directories File names and directories appear in Courier New font. For example, the `Zebra<version number>.tar` file and the `/root` directory.

Icons Used



Important • Advises you of information that is essential to complete a task.




Note • Indicates neutral or positive information that emphasizes or supplements important points of the main text.



Example • Provides an example, often a scenario, to better clarify a section of text.

Illustration Callouts Callouts are used when an illustration contains information that needs to be labeled and described. A table that contains the labels and descriptions follows the graphic. [Figure 1](#) provides an example.

Figure 1 • Sample Figure with Callouts

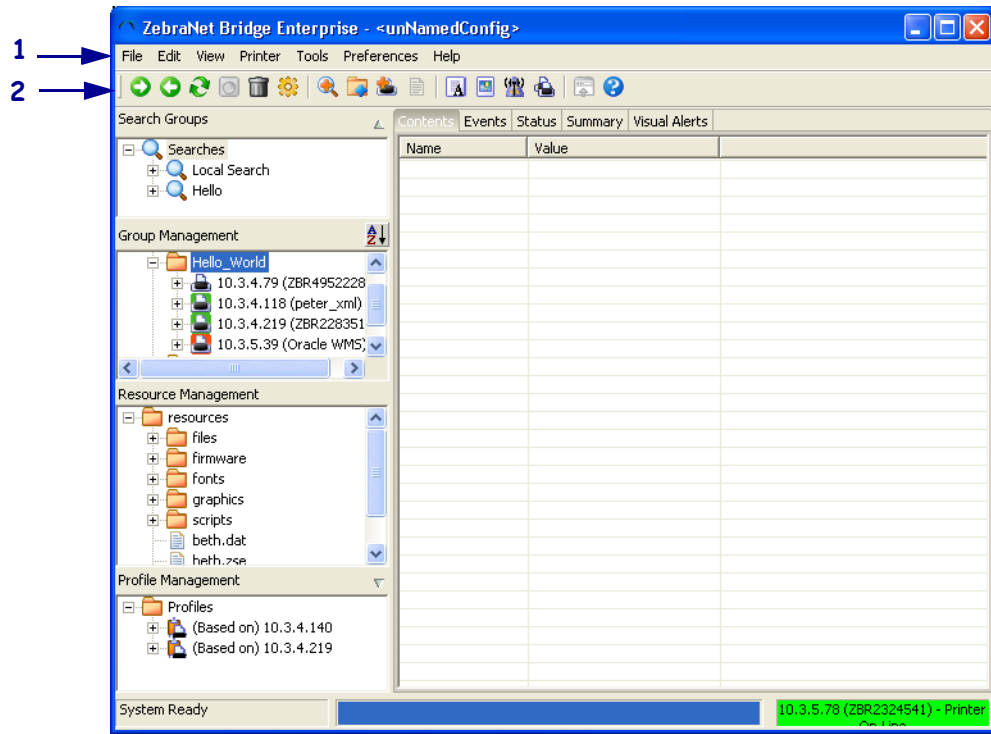

1	Menu Bar
2	Tool Bar

Related Documents

The following documents might be helpful references:

ZPL[®] Programming Guide, Vol. One

ZPL[®] Programming Guide Vol. Two

ZebraNet[®] PrintServer II User and Reference Guide

ZebraNet[®] 10/100 Print Server User Guide

ZebraNet[®] Wireless Print Server User Guide



Introduction

This chapter provides a high-level overview of ZebraNet Bridge Enterprise.

Contents

Overview	2
Components	2
Menu and Toolbar Navigation	6
Supported Languages	7
Activate Product	8
Register Product	9
Feature Matrix	10
Requirements	13
Printer	13
Print Server	13

Overview


ZebraNet Bridge Enterprise remotely configures and monitors ZebraLink-enabled printers and ZebraNet print servers in real time. Core functions include:


- Automatic printer discovery across the enterprise network
- Dynamic group management
- Heartbeat monitoring and status indicators
- Viewable and changeable printer and print server settings
- Easy firmware, font, and file downloading
- Configuration Broadcast
- Critical alert management
- Visual Alerts Management
- Printer profiles

Components


This section provides information about ZebraNet Bridge Enterprise.

For a graphical representations of ZebraNet Bridge Enterprise, see the next few graphics. A table follows the figures and provides a detailed description of each component.

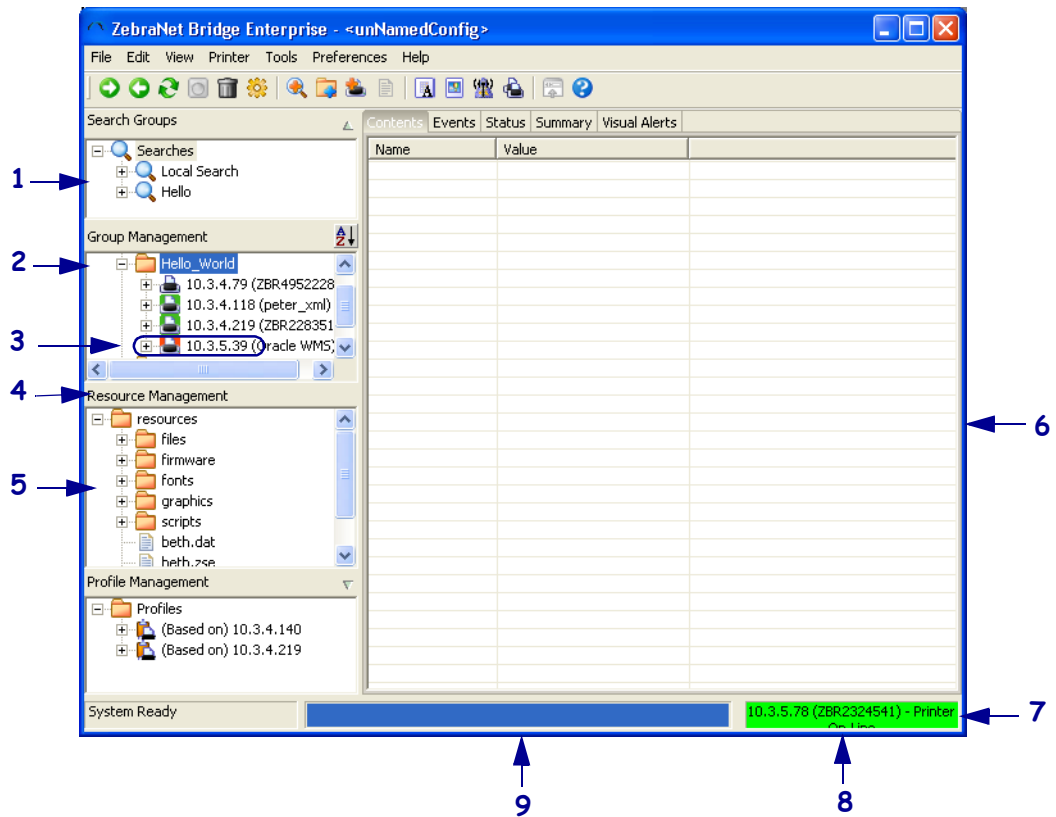

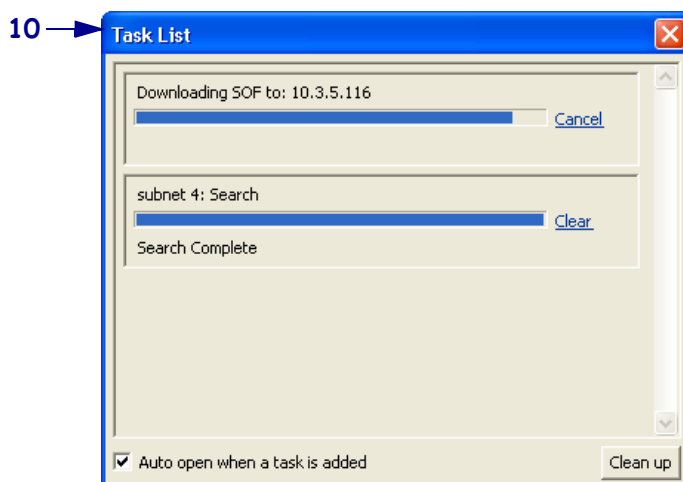

Keys	Graphic Element	Purpose
1	Search Groups window	Allows network searches for Zebra printers with ZebraNet print servers. You can conduct searches using: <ul style="list-style-type: none"> • local broadcast • subnet • directed broadcast • multicast • IP Address and range Content window contains the following: <ul style="list-style-type: none"> • Events tab • Status tab
2	Group Management window	Allows you to manage your Zebra printers and print servers. Content window contains the following: <ul style="list-style-type: none"> • Contents tab • Events tab • Status tab • Summary tab
3	Printer Status icons	Visually alert you of potential problems with your printer or print server. The application heartbeat updates the status icon. The default interval is every 5 minutes.

Keys	Graphic Element	Purpose
4	Resource Management window	<p>Allows you to copy:</p> <ul style="list-style-type: none"> • objects • firmware • fonts • graphics • files <p>to printers in the Group Management window.</p> <p> Important • Ensure that files in the Resource Management window are in the printer's native format.</p> <p>Content window contains the following:</p> <ul style="list-style-type: none"> • Contents tab
5	Profile Management window	<p>Allows you to store printer configurations offline. This capability speeds recovery from printer failure. acts as a <i>golden printer</i> to broadcast configurations (settings and files) to printers across your network.</p>
6	Content window	<p>Allows you to access these tabs:</p> <ul style="list-style-type: none"> • Contents tab — use to view and change settings. • Events tab — use to monitor current alerts. • Status tab <ul style="list-style-type: none"> • Quick Status Panel — provides a high-level status of a given print server. • Detailed Status Panel — when you select Refresh, provides you with a detailed status of a given printer. • Port Status Panel — when you select Refresh, provides current status of network ports on the print server. • Summary tab — use to simultaneously view the status of all printers in the Group Management window. • Visual Alerts tab — use to view a graphical representation of your printer network.
7	System Bar	<p>Allows you to check the system status. The system bar consists of:</p> <ul style="list-style-type: none"> • Alert bar • Progress bar
8	Alert Bar	<p>Displays the latest alert messages that you have not viewed.</p>
9	Progress Bar	<p>Displays when the <i>Task List</i> dialog box is running in the background.</p>

Keys	Graphic Element	Purpose
10	Task List window	Displays the tasks performed on Zebra printers via your network. (For example, refresh a printer, download a file, search.)

Menu and Toolbar Navigation

ZebraNet Bridge Enterprise offers menu bar, toolbar, and right-click functions and navigation.


Menus and Toolbar

This example demonstrates the three navigational methods.



Example • This example shows you how to create a new search using the menu bar, toolbar, and the right-click.


From the menu, select **File**
> **New** > **Search**.



From the toolbar, click the **Add Search** icon.



From the **Search Group** window, right-click on **Searches**, select **New Search**.



For more details, see [Menu Bar](#) on page 129.

Supported Languages

ZebraNet Bridge Enterprise application and help system language preferences default to the local system language.

These are the languages supported in ZebraNet Bridge Enterprise:

- EN (English)
- DE (German)
- IT (Italian)
- FR (French)
- ES (Spanish)
- JA (Japanese)
- KO (Korean)
- PT (Portuguese)
- ZHCN (Simplified Chinese)
- ZHTW (Traditional Chinese)

Activate Product




To access full ZebraNet Bridge features, enter the product serial number into the ZebraNet Bridge application. The serial number is on the back of and inside the ZebraNet Bridge storage sleeve.

To enter the product serial number:

1. From the menu, select Help > Activate Product.

The *Activate Product* dialog box opens.

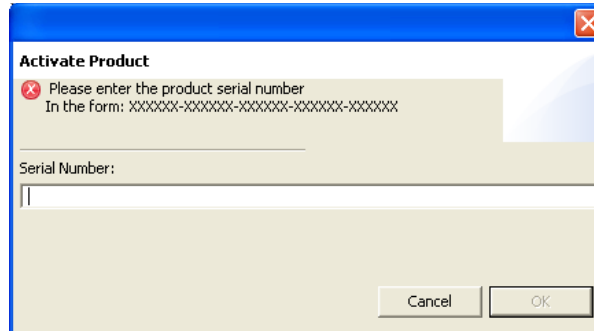

2. In the Serial Number text box, enter your product serial number.
3. Click OK.

Full ZebraNet Bridge features become available. You do not need to restart the application.

Register Product

Registering your license with Zebra is the best way to receive support and product updates. You must register your product to:

- create a technical service request
- get repair warranties
- receive product updates



Note • Your PC must connect to the Internet. To register, you need your product serial number.

To register your product:

1. Verify that your PC is connected to the Internet.
2. From the menu, select Help > Registration.
The Zebra product registration web page opens.

Feature Matrix

The following table compares the functions of ZebraNet Bridge Enterprise editions. ZebraNet Bridge Enterprise free edition does not contain all features. (Note the free edition does not use a serial number.) The licensed edition contains all features.

Table 1 • Feature Matrix

Feature	Free Edition	Licensed Edition	Description
Application Heartbeat	✗	✗	Controls the frequency of status icon updates.
Discovery	✗	✗	Finds wired and wireless printers on the network.
Parallel/Serial/USB Support	✗	✗	Manages printers that connect to a PC via local port.
Quick Status	✗	✗	Provides print server status.
Detailed Status	✗	✗	Provides detailed view of printer status.
Port Status	✗	✗	Provides print server port status.
Visual Status Icons	✗	✗	Color-coded icons to assess printer health.
Mobile Printer Support	✗	✗	Supports mobile printers with 802.11b.
View Device Web Page	✗	✗	Views printers' internal web page, view, and change settings.
Wireless Setup Wizard	✗	✗	Sets up wireless stationary and mobile printers.
Printer Communication window	✗	✗	Sends commands to printer and view printer response.
Compare Printers	✗	✗	Side-by-side comparison of printer and print server settings and memory.
Change Settings	✗	✗	Changes printer settings remotely.
Configure Alerts	✗	✗	Configures printer alerts.
Alert Logging via SNMP	✗	✗	Allows you to use SNMP to capture alerts.
Alert Logging via TCP/IP	✗	✗	Allows you to use TCP/IP to capture alerts.
Alert Filtering - Device/Group	✗	✗	Allows you to view alerts by printer, group of printers, or groups of groups.

Table 1 • Feature Matrix (Continued)

Feature	Free Edition	Licensed Edition	Description
Alert Filtering - Severity	✗	✗	Allows you to view and sort events by: <ul style="list-style-type: none"> • printer name • printer IP address • time • event type • event severity.
Set Alert Severity Levels	✗	✗	Allows you to sign alert severity.
File Editing	✗	✗	Retrieve and change files that reside on printers.
Firmware Download - 1:1	✗	✗	Downloads firmware to one printer.
Objects Download - 1:1	✗	✗	Downloads one object file to one printer.
Objects Download - 1:Group or Many		✗	Downloads object files from the Resource Management window to printer groups or many printers.
Objects Download - Many:1	✗	✗	Downloads many object files to one printer.
Objects Download - Many: Group or Many		✗	Downloads many object files from the Resource Management window to a group of printers.
Copy Printer Settings - 1:1	✗	✗	Copies printer settings from one printer to another printer.
Copy Printer Settings - 1:Group or Many		✗	Copies printer settings from one printer to many printers or a printer group.
Copy Printer Network Settings - 1:1	✗	✗	Copies network settings from one printer to another printer.
Copy Printer Network Settings - 1:Group or Many		✗	Copies network settings from one printer to many printers or a printer group.
Copy Alerts - 1:1	✗	✗	Copies alerts from one printer to another printer.
Copy Alerts - 1:Group or Many		✗	Copies alerts from one printer to many printers or a printer group.

Table 1 • Feature Matrix (Continued)

Feature	Free Edition	Licensed Edition	Description
Copy Objects - 1:1	✘	✘	Copies objects from one printer to another printer.
Copy Objects - 1:Group or Many		✘	Copies objects from one printer to many printers or a printer group.
Copy All - 1:1	✘	✘	Copies alerts, settings, and objects from one printer to another printer.
Copy All - 1:Group or Many		✘	Copies alerts, settings and objects from one printer to many printers or a printer group.
Create Printer Profile		✘	Allows you to create and save a printer profile for deployment and backup configuration.
Import Printer Profile		✘	Imports printer profiles from other locations.
Export Printer Profile		✘	Exports a printer profile to use at another location or for printer troubleshooting.
Download Printer Profile - 1:1		✘	Copies a printer profile to a single printer.
Download Printer Profile - 1:Group or Many		✘	Copies a printer profile to many printers or a group of printers.
Visual Alerts		✘	Allows you to setup a graphical representation of your printer network.
Multiple User Interface Configurations		✘	Manages multiple locations with different application settings.

Requirements

Printer

These are the supported Zebra printers:

Printers with X.10 and higher firmware

All X.10 and higher ZPL printers, including the following available printers:

- | | |
|---|---|
| <ul style="list-style-type: none"> • <i>XiIII Plus</i> • Z4Mplus/Z6Mplus • 105SL • S4M • S600 • TLP 2844Z • TLP 3844-Z | <ul style="list-style-type: none"> • TLP 2824-Z • LP 2844Z • LP 3844-Z • LP 2824-Z • PAX4 • R110Xi • R170Xi • R110PAX4 • R4Mplus |
|---|---|
-

Card Printers

Card printers, including:

- P330i
 - P430i
-

Mobile Printers

Mobile printers, including:

- | | |
|--|--|
| <ul style="list-style-type: none"> • QL 220 • QL 320 • QL 420 | <ul style="list-style-type: none"> • QL 320 Plus • QL 420 Plus • RW 220 • RW 420 |
|--|--|
-

Print Server

These are the supported print servers:

ZebraNet Print Servers

ZebraNet PrintServer II

ZebraNet 10/100 Print Server

ZebraNet Wireless Print Server

Desktop PrintServer II implementation

Card Printer 10/100 and PrintServer II Implementations



Install

This chapter identifies the system requirements and walks you through the CD installation.

Contents

System Requirements	16
Workstation	16
Operating System	16
Requirements for Cross-Network Communication.....	16
Installation	17

System Requirements

This section identifies the minimum hardware, software, and network requirements.

Workstation

- 500 MHz processor
- 128MB RAM
- 200MB hard-disk space

Operating System

- Windows NT[®] 4.0 with SP6a or higher
- Windows[®] 2000 Professional/Server
- Windows XP Home/Professional (32-bit versions)
- Windows 2003 Server[®] (32-bit versions)

Requirements for Cross-Network Communication

Security settings on network routers could disable some product functions. To enable the following features across routers, configure the routers to enable associated ports.

Discovery

For advanced discovery functions:

- UDP packets to the printer over port 4201
- Directed broadcast requires UDP broadcast packets (xxx . xxx . xxx . 255)
- Multicast must be enabled for specific address - 241 . 0 . 1 . 55.

View and change Settings and Configuration copying

Minimum requirements:

- SNMP on the client system
- TCP/IP over port 9100
- FTP for mobile printers

Status and Alert Monitoring

Minimum requirements:

- TCP connections over port 54321
- SNMP traps over port 162

Installation


This section tells you how to install the application.

To install ZebraNet Bridge from a CD:

1. Insert the CD into your computer CD ROM drive.
A splash screen with a working status bar opens.
2. When the splash screen finishes, the *Installation* dialog box opens.




3. Click Next.
The *License Agreement* dialog box in opens.

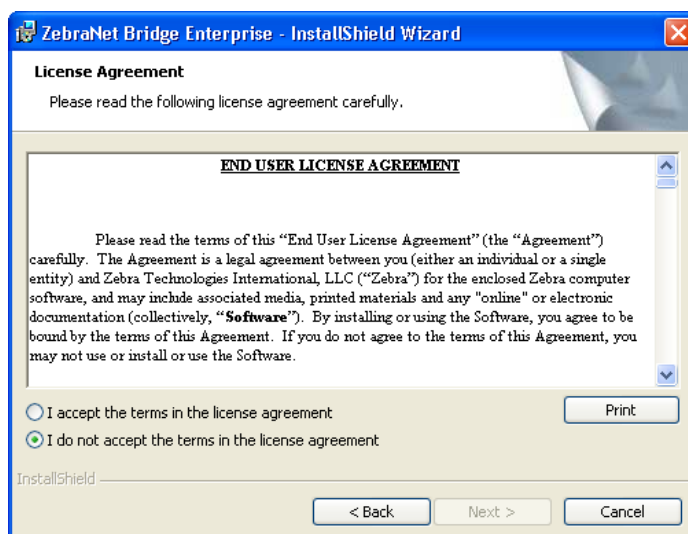

4. Read the license agreement.
5. To accept, enable the **I accept the terms in the license agreement** option.

6. Click Next.


The *Installation Destination* dialog box opens.

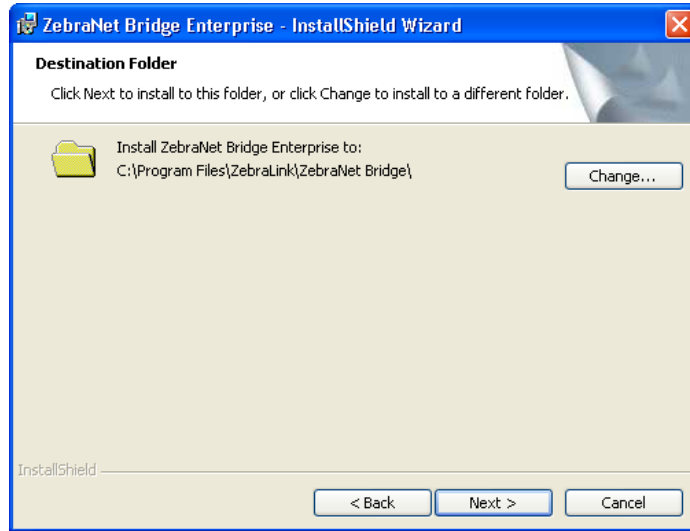

7. Do you want to change the destination location where ZebraNet Bridge resides?


If...	Then...
No	Click Next and continue with step 8 .
Yes	<ol style="list-style-type: none"> 1. Click Change. 2. Navigate to the location you want. 3. Select OK. 4. Verify the location. 5. Click NEXT.

The *Destination Confirmation* dialog box opens.

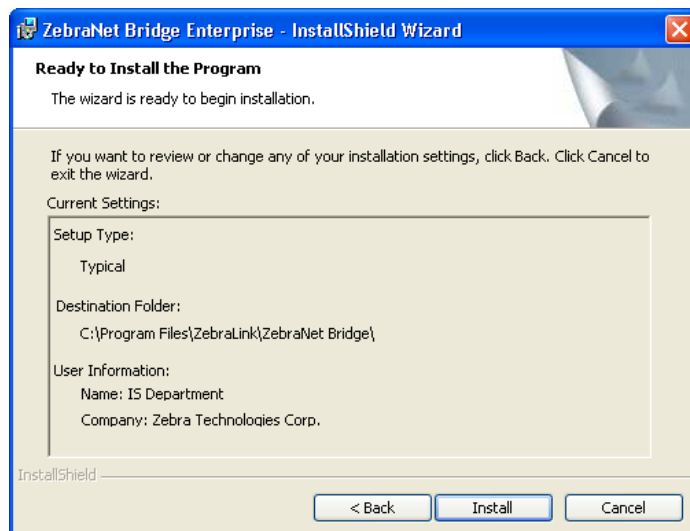

8. Is all the information in the *Destination Confirmation* dialog box correct?

If...	Then...
No	<ol style="list-style-type: none"> 1. From the dialog box, click Back, and make the necessary changes. 2. Click Install. 3. Continue to step 9
Yes	<ol style="list-style-type: none"> 1. Click Install. 2. Continue to step 9.

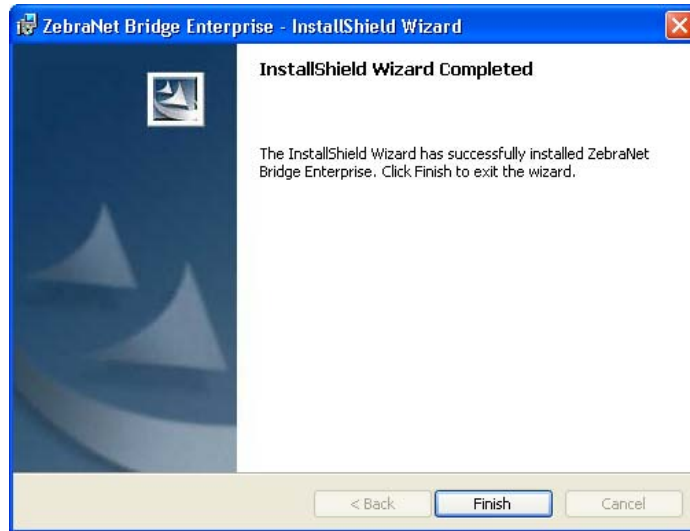

9. Click Finish.



Getting Started

This chapter provides instructions on working with frequently used ZebraNet Bridge features. Instructions follow typical sequence of events when first using the application.

Contents

Overview	23
Search Group Window and Printer Discovery	23
Group Management Window	23
Resource Management Window	23
Profile Management Window	23
Task List Dialog Box	24
Multiple User Interface Configurations	24
Working with Mobile Printers	24
Working with Card Printers	25
Set System Preferences	26
Main Settings Tab	26
Printer Options Tab	29
Search Group Window and Printer Discovery	35
Default View	35
Before You Begin	35
Create a Local Broadcast Search Group	36
Create a Subnet Search Group	37
Create a Directed Broadcast Search Group	38
Create a Multicast Search Group	39
Create an IP Address Search Group	40
Cleaning	41

Contents (Continued)

Group Management Window	42
Create a Group	42
Copy Search Groups	43
Copy Individual Printers to a Group	43
Add Printers	44
Sort Printers and Groups	48
Printer Preferences	49
Delete Printers/Groups	52
Resource Management Window	53
Types of Objects	53
Add Files	54
Scripts	54
Profile Management Window	55
Creating and Downloading Printer Profiles	55
Exporting and Importing Printer Profiles	56
Task List Dialog Box	58
Multiple User Interface Configurations	59
Save a Configuration	59
Open a Specific Configuration	60

Overview

This section helps you understand the graphical user interface (GUI), which includes:

- Search Group window and printer discovery
- Group Management window
- Resource Management window
- Profile Management window
- Task List dialog box
- Multiple User Interface Configurations
- Working with Mobile printers
- Working with Card Printers

Search Group Window and Printer Discovery

The Search Group window allows you to search for printers. The Search Group window is the easiest way to find Zebra printers on your network. When starting out with ZebraNet Bridge, this is the first application window you will use.

Search groups update dynamically. Group members depend on which printers the application finds on the network. For more details, see [Search Group Window and Printer Discovery on page 35](#).

Group Management Window

The Group Management window allows you to manage single printers and printer groups. To help you manage your Zebra printer network, you can dynamically group similar printers. Or you can group printers by location. To perform printer management tasks, use the Group Management window. For more details, see [Group Management Window on page 42](#).

Resource Management Window

The Resource Management window is a storehouse for printer firmware, label formats, graphics, and fonts. Files in the Resource Management window must be supported ZPL file formats. You can copy files from the Resources window and paste them to selected printers. You will find the printers in the Group Management window. For more details, see [Group Management Window on page 42](#).

Profile Management Window

The Profile Management window provides you with the ability to store printer configurations, or profiles. *Golden printer* configurations can be stored for broadcast to new printers, significantly speeding printer set up time. In addition, should a critical printer fail, it can be replaced and quickly put into service by downloading the profile across the network. For more details, see [Profile Management Window on page 55](#).

Task List Dialog Box

The *Task List* dialog box identifies tasks and provides a progress bar for each task. The progress bar shows the current status of the task. All application requests to the printer are monitored by the *Task List* dialog box.

Multiple User Interface Configurations



This feature is available only in the ZebraNet Bridge Enterprise licensed version.

ZebraNet Bridge Enterprise supports multiple user interface configurations. This is useful for managing large groups of printers in various configurations. For instance, you may want a different application configuration for each department or location. For more details, see [Multiple User Interface Configurations on page 59](#).

Working with Mobile Printers

Select mobile printers may be managed with ZebraNet Bridge Enterprise, however, there are several inherent differences in how mobile printers work with the application. These differences are outlined below:

Search Window

Zebra's mobile printers do not respond to discovery requests. Mobile printers will not be included in the results of search groups in the Search window.

Group Management Window

Zebra mobile printers may be added to groups within the Group Management window by using the Add Printer feature.

Management of mobile printers in the Group Management window is accomplished similarly to management of stationary printers. However, the available options for mobile printers will vary from those found with stationary Zebra printers. For example, mobile printers do not have Alerts.

Status Icons

Because mobile printers do not respond to discovery requests, status icons for mobile printers will always have a white background.

Events Tab

Because mobile printers do not have alerts, the Events tab will not display messages when you select a mobile printer.

Status Tab

Mobile printers do not have an internal print server. The Status tab of a mobile printer does not display Quick Status. Request Detailed Status or Port Status by clicking Refresh.

Summary Tab

Because mobile printers do not respond to discovery requests, status icons for mobile printers in the Summary tab will always have a white background.

Visual Alerts

Because mobile printers do not have alerts, the Visual Alerts tab will not display alerts.

Working with Card Printers

Select card printers may be managed with ZebraNet Bridge Enterprise, however, there are several inherent differences in how card printers work with the application. These differences are outlined below:

Group Management Window

Management of card printers in the Group Management window is accomplished similarly to management of stationary printers. However, card printer settings may not be viewed and changed in the Group Management Window. Print server settings and alerts are available.

Profile Management

Profiles may be created for Zebra card printers, however, only the print server settings will be included in the printers profile.

Events Tab

Print server alerts may be received and displayed in the events tab. Card printers do not support printer alerts.

Status Tab

Quick status and Port status panes will display status similar to stationary printers. The Detailed Status pane, upon refresh will display limited card printer status information.

Visual Alerts

Zebra card printers may be included in visual alerts, however, only print server alerts are available and displayed.


Set System Preferences

Using System Settings, you can control how ZebraNet Bridge works in your network environment. By using the Printer Display and View Filter - Events settings you can select what displays within the application. Configure these settings from Menu > Preferences.

- Event notification
- System heartbeat
- Printer display options
- Discovery options
- View filter events
- Alert options

Main Settings Tab

The *System Settings* dialog box shows the Main Settings tab.

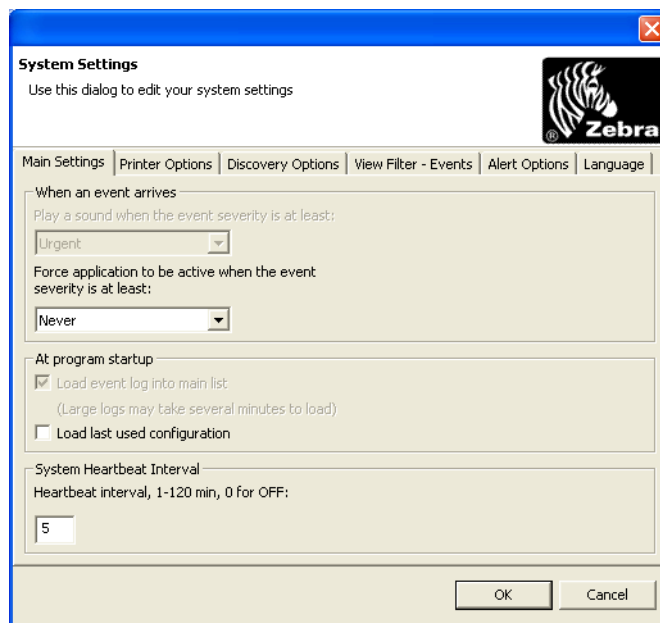


Event Notification

If the application is running minimized and captures alerts, ZebraNet Bridge visually notifies you. Event notification allows you to monitor printers that have a specific event type, such as Urgent.

To receive visual notices when printers capture alerts:

1. From the menu bar, select Preferences > System Settings.

The *Main Settings* tab opens.

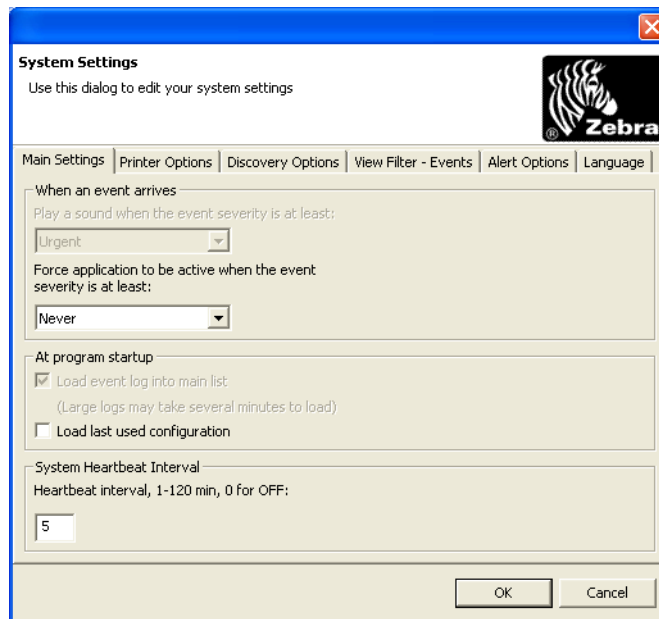

2. From the When an event arrives area, click the Force application to be active when the event severity is at least list and select the event severity that you need.

Your choices are: Never (default), Info, Warning, Urgent.

3. Click OK.



Note • You can set alert event severity levels in the *View Filter - Events* tab of the *System Settings* dialog box. For details see [View Printer and Print Server Alerts on page 75](#).

Program Startup



This feature is available only in the ZebraNet Bridge Enterprise licensed version.

If you have saved multiple user interface configurations you can specify how you want the application to act at startup. For more details, see [Multiple User Interface Configurations on page 59](#).

1. From the menu bar, select Preferences > System Settings.

The *Main Settings* tab opens.

2. What default configuration do you want to use?

If...	Then...
you want to use the last used configuration	At the program startup area, enable Load last used configuration check box.
you want to select the configuration at startup	At the program startup area, uncheck the Load last used configuration check box.

System Heartbeat

The System Heartbeat controls how often the printers status icon and quick status update. The default interval is five minutes.

To assign a system heartbeat interval:

1. From the menu bar, select Preferences > System Settings.

The *Main Settings* tab opens.

2. Decide the time (in minutes) that you want ZebraNet Bridge to wait between heartbeat pulses; in the System Heartbeat Interval area, type in the time.




Note • Setting the System Heartbeat interval to 0 disables these functions:

- The system heartbeat
- Automatic update of status icons
- Quick status functions

3. When you are finished, click OK.

Printer Options Tab

The *System Settings* dialog box shows the *Printer Options* tab.

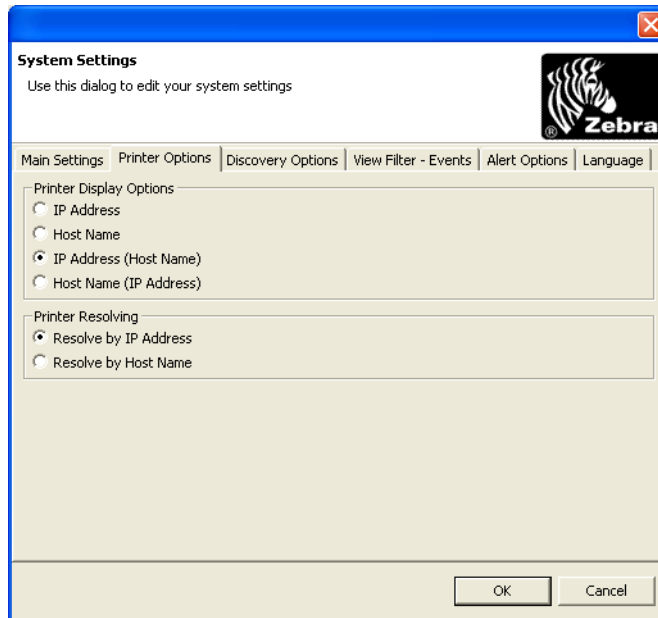

Printer Display Options

ZebraNet Bridge allows you to customize your printer view. The default setting for displaying printer options is IP address. Selections include:

- IP Address
- Host Name
- IP Address (Host Name)
- Host Name (IP Address)



Important • Using non-printable or XML characters (<, >, /) in printer system or host names can result in undesired results.

To change printer display options:

1. From the menu bar, select Preferences > System Settings.
2. Select the Printer Options tab.
The *Printer Options* tab opens.

3. In the Printer Display Options area, select the desired printer display option.
4. When you are finished, click OK.

Printer Resolving

ZebraNet Bridge can resolve printers by IP Address or by Host Name. The default setting resolves printers by IP address.



Note • The recommended method is Resolve by IP Address unless it is not supported by your network.

To change printer resolving:

1. From the menu bar, select Preferences > System Settings.
2. Select the Printer Options tab.
The *Printer Options* tab opens.
3. In the Printer Resolving area, select the desired printer resolve option.
4. Click OK.

Discovery Options Tab


Your network topography affects the printer discovery process. You can optimize discovery options for your networked Zebra printers. Three adjustments ensure detection of Zebra printers on your network. ZebraNet Bridge allows you to change:

- Time-out intervals
- Retries for printer discovery
- Heartbeat retries

To change discovery options:

1. From the menu bar, select Preferences > System Settings.
2. Select the Discovery Options tab.

The *Discovery Options* tab opens.

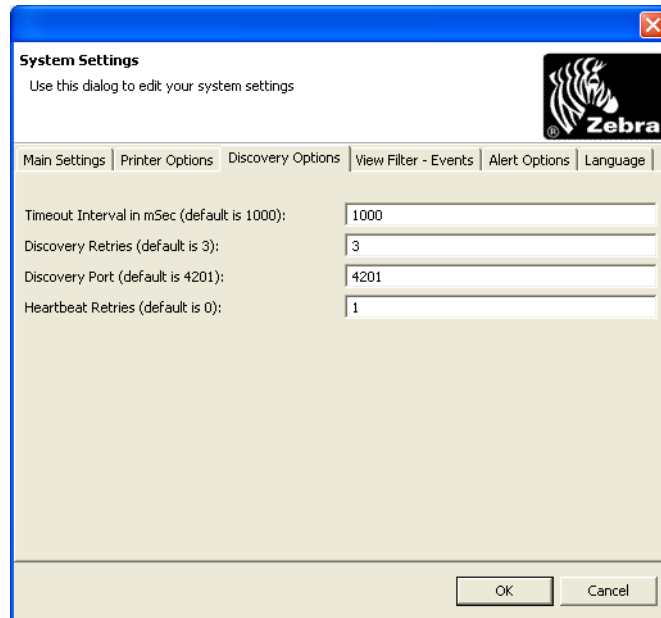

3. Change Discovery Options as desired. The options are:

- *Timeout Interval in mSec*: The time that the application waits for response from a printer on your network. The default is 1000 mSec.
- *Discovery Retries*: The number of requests for response from your network printers. The default is 3.
- *Discovery Port*: The network port that the application uses for discovery requests. Your network might use this port for another application. If so, you can change this port on your Zebra printers. Then direct the application to the new port. The default is 4201.
- *Heartbeat Retries*: The number of retries during a heartbeat request. If your network is slow, change the application to retry a number of times. This change ensures accurate printer status reports. The default is 0.


4. When you are finished, click OK.

View Filter – Events Tab

ZebraNet Bridge allows you to capture TCP and SNMP transmitted printer and print server alerts. ZebraNet Bridge also allows you to filter events by event severity.

To change event filter severity levels:

1. From the menu bar, select Preferences > System Settings.
2. Select the *View Filter – Events* tab.
The *System Settings* dialog box opens.
3. Find the events (or printer alerts) you want to use.
4. Select the alert name.
5. In the Severity list, select the desired application severity.
6. Click OK.

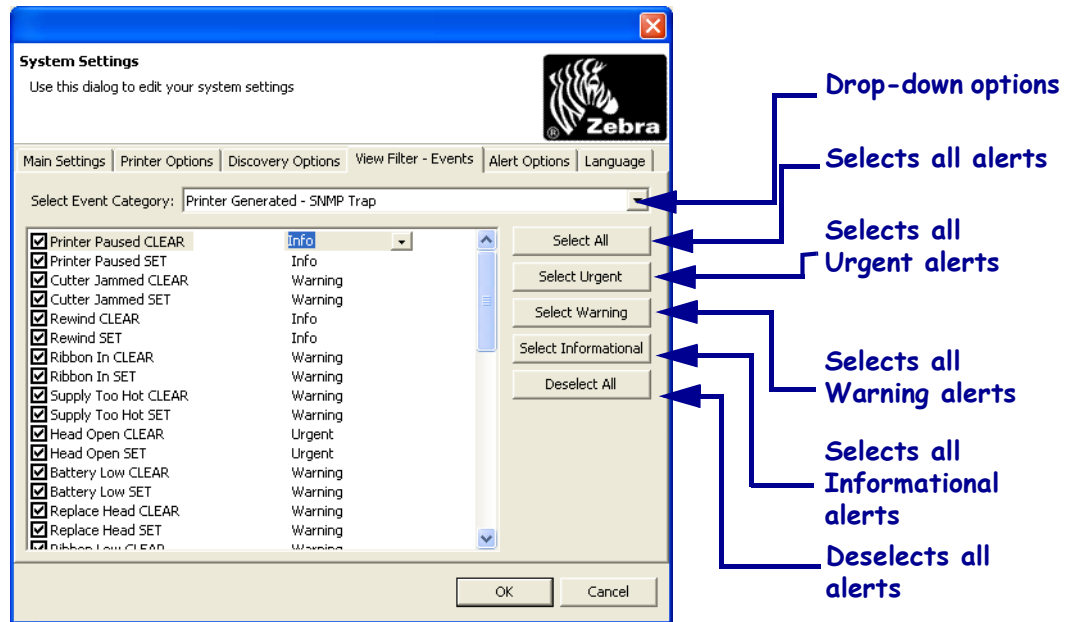


Alert Options Tab

ZebraNet Bridge allows you to configure alert behavior within the applications.

To change TCP alert listening port:


1. From the menu bar, select Preferences > System Settings > Alert Options.
The *Alert Options* tab opens.

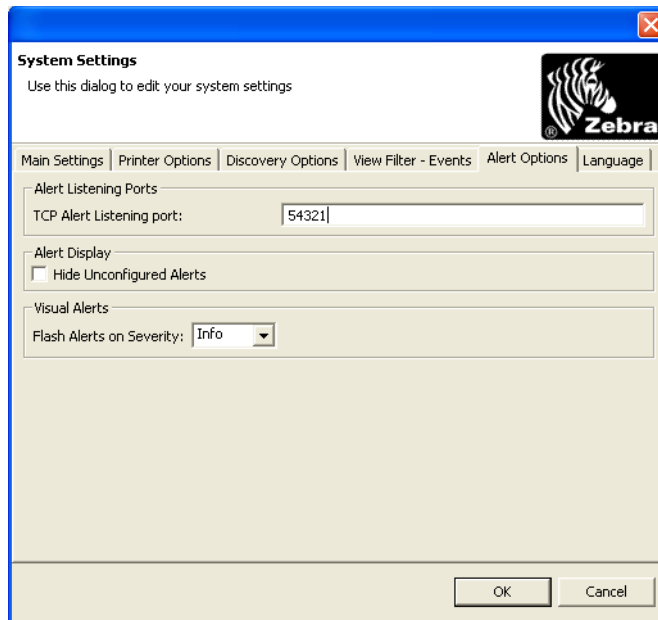

2. In **Alerts Listening Ports**, change the TCP Alert Listing Port value.

To hide unconfigured printer alerts:

1. From the menu bar, select Preferences > System Settings.
2. Select the Alert Options tab.
The *Alert Options* dialog box opens.
3. In the Alert Display area, click Hide Unconfigured Alerts.
The *Notice* dialog box opens.

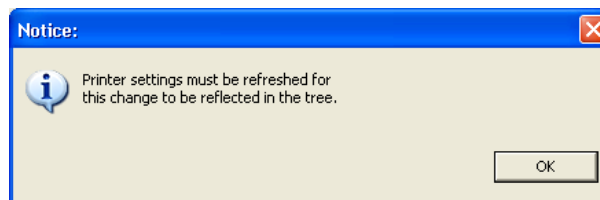

4. To close the *Notice* dialog box, click OK.
5. To save your system settings changes, click OK.

To configure visual alert options:

1. From the menu bar, select Preferences > System Settings.
2. Select the *Alert Options* tab.
The *Alert Options* tab opens.
3. In the Flash Alerts by Severity list, select the applicable event severity you want.

Search Group Window and Printer Discovery

Discovery allows you to search a variety of ways, including:

- local broadcast
- subnet
- directed broadcast
- multicast
- IP address

Default View

The Search Group window includes a default local search. The local search group is populated with printers found in a local subnet broadcast when the application is opened.

Before You Begin

Before you begin you need to decide how you plan to search.



Important • Search group names should not include these characters: <, >, /.

What kind of search do you want to complete?

If you want to search by...	Then...
Local Broadcast	Go to Create a Local Broadcast Search Group on page 36 .
Subnet	Go to Create a Subnet Search Group on page 37 .
Directed Broadcast	Go to Create a Directed Broadcast Search Group on page 38 .
Multicast	Go to Create a Multicast Search Group on page 39 .
IP Address	Go to Create an IP Address Search Group on page 40



Note • You can enter more than one search or search-type within a search group.


Create a Local Broadcast Search Group

Local broadcasts send a discovery request to the local broadcast address of 255.255.255.255. This request finds printers in the same local network as the requesting computer.

To perform a local broadcast search group:

1. In the Search Group window, right-click Searches.
2. Select New.

The *New Search Group* dialog box opens.

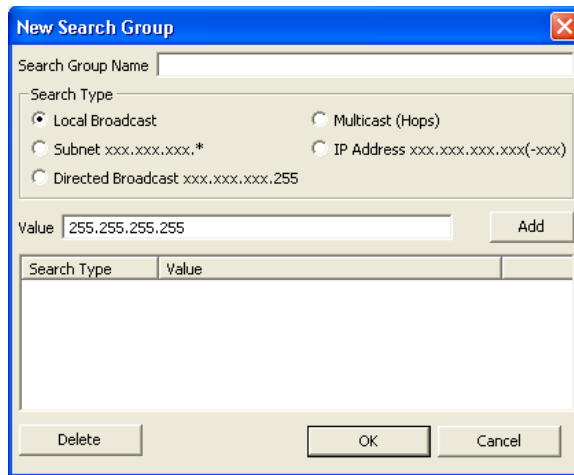

3. In the Search Group Name text box, type in the search name.
4. Enable the Local Broadcast option button.
5. The Value field is automatically populated. Click Add.
The Value field is added to Search type.
6. Click OK.
The *Task List* dialog box shows the task progress.

Create a Subnet Search Group

The subnet search sends a discovery request to each address in the specified subnet. This feature is useful for networks that prevent broadcast packets from passing across routers. The Subnet search requires you to type in the first three subnet octets.




Example • A request to 192 . 168 . 2 . * sends a request to: 192 . 168 . 2 . 1 through 192 . 168 . 2 . 254.

To perform a subnet search group:

1. In the Search Group window, right-click Searches.
2. Select New Search.

The *New Search Group* dialog box opens.

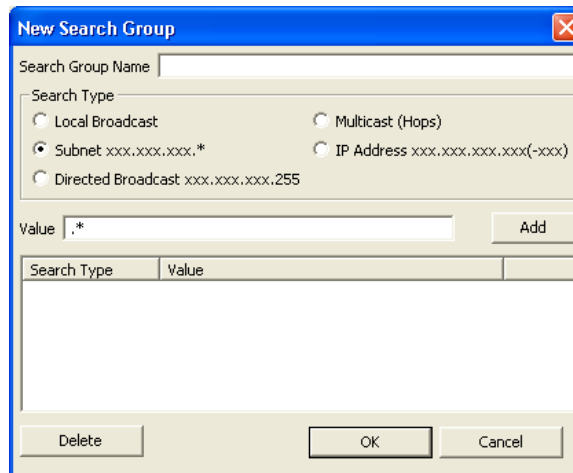

3. In the Search Group Name text box, type the search name.
4. Enable the Subnet option button.
5. In the Value field, type the first three subnet octets followed by an *.
6. Click Add.
7. Click OK.

The *Task List* dialog box shows the task progress.

Create a Directed Broadcast Search Group

Directed broadcasts send a discovery request to the broadcast address of the specified subnet.



Note • If a broadcast search does not work, the broadcast packets may be disabled across routers. Try multicast or subnet search.




Example • The directed broadcast search requires you to type in the first three subnet octets, followed by 255, such as 192 . 168 . 2 . 255.

To perform a Directed Broadcast search group:

1. In the Search Group window, right-click Searches.
2. Select New Search.

The *New Search Group* dialog box opens.

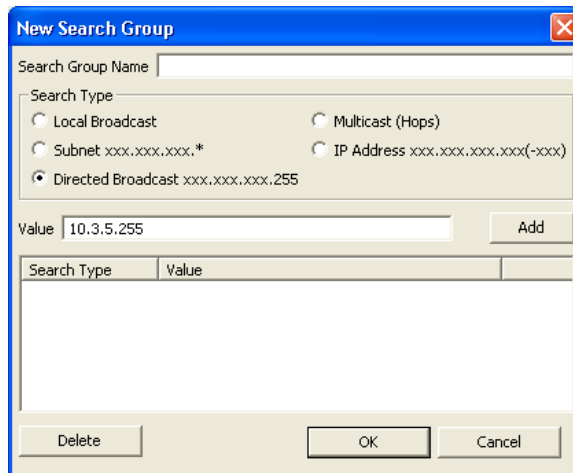

3. In the Search Group Name text box, type in the search name.
4. Enable the Directed Broadcast option button.
5. In the Value field, type in the first three subnet octets and then 255.
6. Click Add.
7. Click OK.

The *Task List* dialog box shows the task progress.

Create a Multicast Search Group

Multicast uses the multicast address to send a discovery address to all Zebra Printers across as many routers as the hop count specifies. A multicast search may return a large number of printers in some installations.




Note • On some routers, this feature may be disabled. See your network administrator to determine if a search failure was due to this feature being disabled.

The Multicast search requires you to type in the number of routers to hop.

To perform a Multicast search group:

1. In the Search Group window, right-click Searches.
2. Select New Search.

The *New Search Group* dialog box opens:

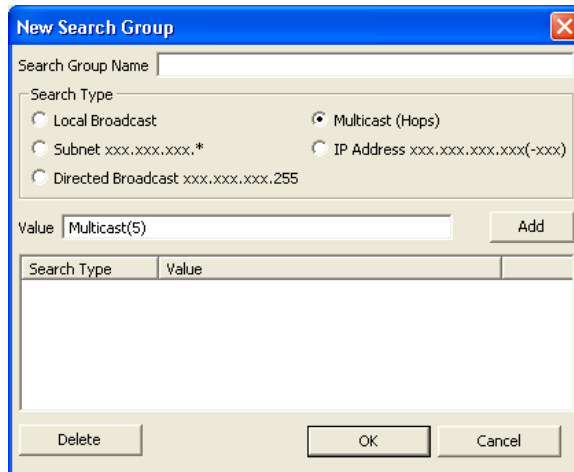

3. In the Search Group Name text box, type in the search name.
4. Enable the Multicast (Hops) option button.
5. Within the parentheses, in the Value field, type in the number of routers to hop.
6. Click Add.
7. Click OK.

The *Task List* dialog box shows the task progress.

Create an IP Address Search Group

To complete the IP address search, you can enter an IP address or an address range.



Example 1 • To send a discovery request to 10.3.5.20 only, enter:

10.3.5.20



Example 2 • To send a discovery request to printers in the address range of 10.3.5.20 through 10.3.5.47, enter:


10.3.5.20-47

The IP address search avoids sending unnecessary traffic to non-printing devices.

To perform an IP address search group:

1. In the Search Group window, right-click Searches.
2. Select New Search.

The *New Search Group* dialog box opens.

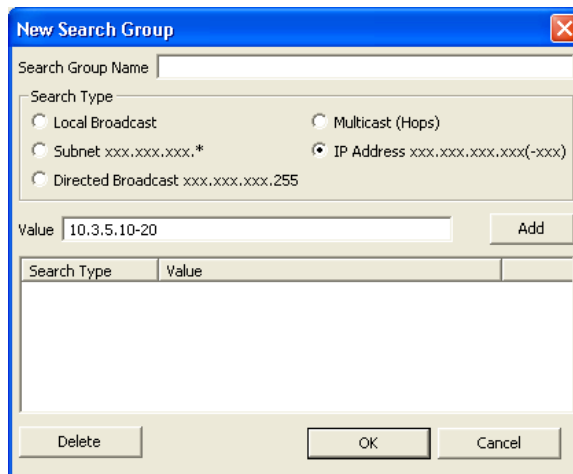

3. In the Search Group Name text box, type in the search name.
4. Enable the IP Address option button.
5. In the Value field, type in the IP address, or partial address using *.
6. Click Add.
7. Click OK.

The *Task List* dialog box shows the task progress.

Gleaning

In your search results, you may discover a printer with the IP address 0.0.0.0.



Note • The system assigns this IP address to a printer (with a print server) that has not acquired an IP address through DHCP.

To reassign a printer with the 0.0.0.0 IP address:

1. In the Search Group window, right-click on the printer.
2. From the list, select Set IP Address.
3. In the dialog box, enter the desired IP address.
4. Click OK.



Note • For wired print servers with an 0.0.0.0 address can only be discovered through a local broadcast.

Group Management Window

The Group Management window allows you to manage single Zebra printers and groups of printers. To manage your printer network, you can group printers by type or by location. Printers can reside in more than one group.



Example • If you wanted manufacturing floor printers in their own subfolder, you could rename the new group folder to “Manufacturing.” Naming printers by location or department helps you to monitor the designated groups of printers.

Create a Group

Creating a group allows you to manage groups of printers in one location or folder.

To create a new group:

1. In the Group Management window, right-click on Groups.
2. Select New > Group.
The new group folder appears as New Group.
3. Type in a new name for the New Group folder.
4. Press Enter.
5. If you want to populate your new group, go to [Copy Individual Printers to a Group on page 43](#).

Copy Search Groups

To make setting up large groups of printers easier, copy entire search groups to the Group Management window.

To copy a search group:

1. In the Group Management window, find the search group that you want to copy.
2. Right-click on the source search group.
3. Select Copy.
4. Find the group that you want to paste this group into.
5. Right-click on the target group.
6. Select Paste > Group.

Copy Individual Printers to a Group

To populate a group with a variety of printers, you can copy individual printers to the group as needed.

To copy and paste printers into a group:

1. From Search Group or Group Management window, find the source printer you want to copy.
2. Right-click on the source printer.
3. Select Copy.
4. In the Group Management window, find the target group that you want the printer copied into.
5. Right-click on the group.
6. Select Paste > Copy printer to group.
7. Repeat [step 1](#) through [step 5](#) until the target group contains all of the printers you want to manage.

Add Printers

You can add networked or locally connected printers from the Group Management window. You can add a printer to the group folder or to a group subfolder.




Note • For local printers, the heartbeat interval does not update the printer status icon.

To add a networked printer:

1. In the Group Management window, right-click on a group.
2. Select New > Printer.


The *Add Printer Wizard* dialog box opens.

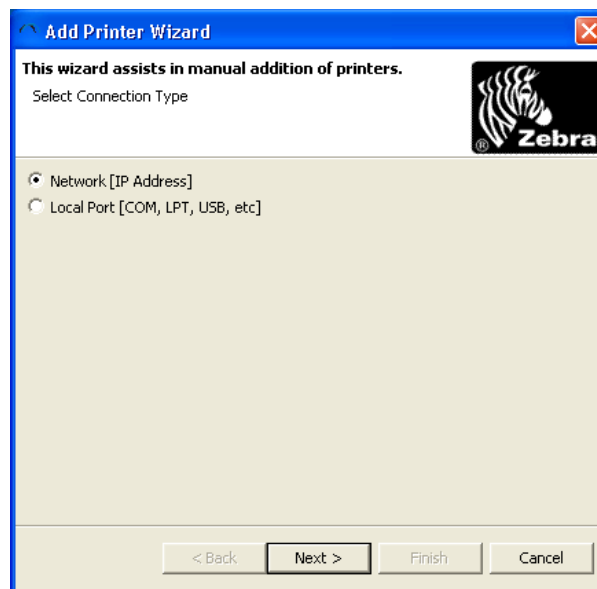



3. Select Network (IP Address).

4. Click Next.

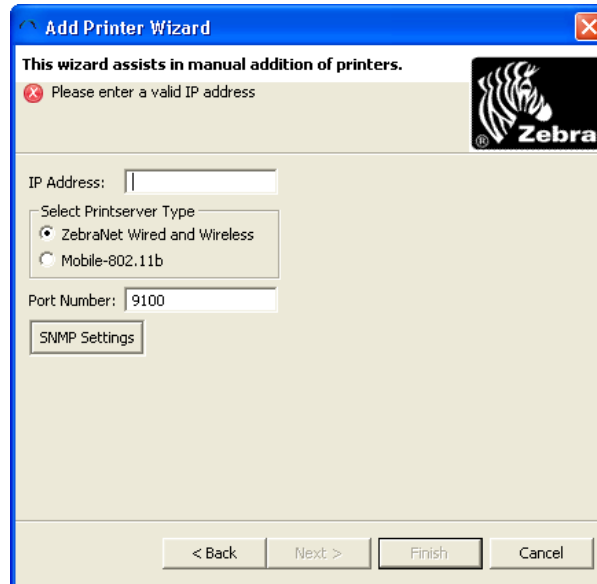The *Add Printer Wizard* dialog box opens.



5. What type of printer do you wish to add?

If ...	Then...
You are adding a stationary printer	<ol style="list-style-type: none"> 1. Enter the IP address of the printer that you wish to add. 2. From Select PrintServer Type, select the ZebraNet Wired and Wireless option box. 3. Enter the port number for the printer. <p> Note • The default port for Zebra tabletop and desktop printers is port 9100.</p>
You are adding a mobile printer	<ol style="list-style-type: none"> 1. Enter the IP address of the printer that you wish to add. 2. From Select PrintServer Type, select the Mobile-802.11b option box. 3. Enter the port number for the printer. <p> Note • The default port for Zebra tabletop and desktop printers is port 6101.</p>

6. Click Finish.

The printer is automatically added to the selected group in the Group Management window.

The next heartbeat interval updates the printer status icon. You may expand the printer using the + icon beside the printer IP Address.




Note • For local printers, the heartbeat interval does not update the printer status icon.

To add a local printer:


1. In the Group Management window, right-click on a group.
2. Select New > Printer.

The *Add Printer Wizard* dialog box opens.

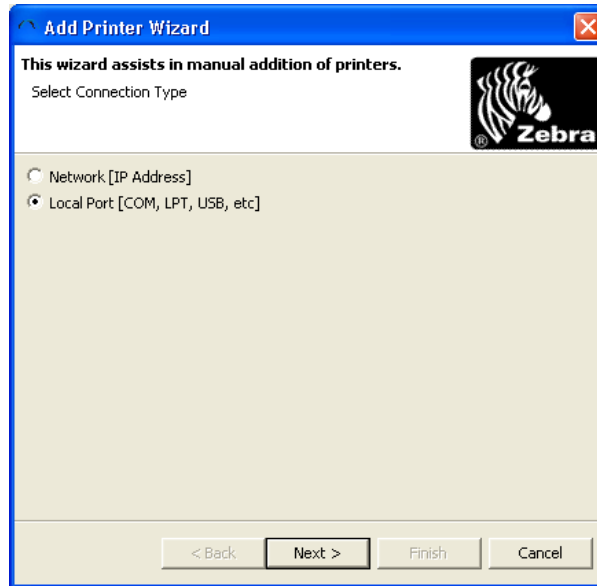

3. Select Local Port (COM, LPT, USB, etc.).
4. Click Next.

The *Add Printer Wizard* dialog box opens.

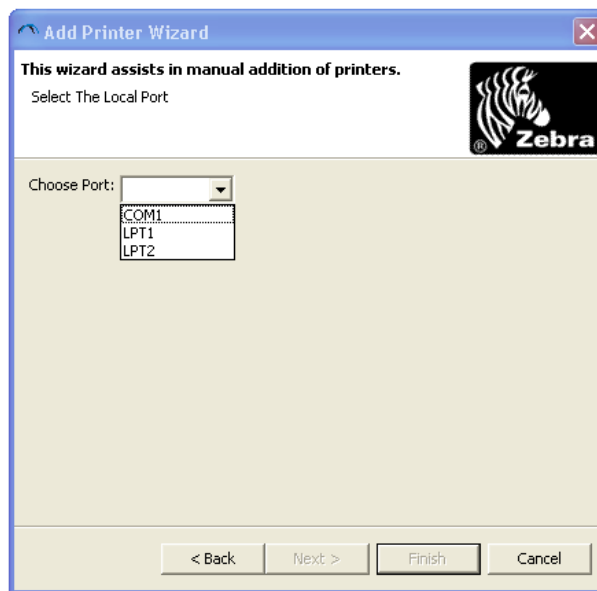


Note • If you have a driver installed on a local port, that port will not be available in the list. A message to notify you of unavailable ports displays in the dialog box.

5. From the list, select the port location of your printer.

If you select...	Then...
An LPT or USB port	Click Finish.
A COM port	The <i>Add Printer Wizard</i> dialog box expands.

6. Adjust COM port settings to match those in use by your PC and printer.

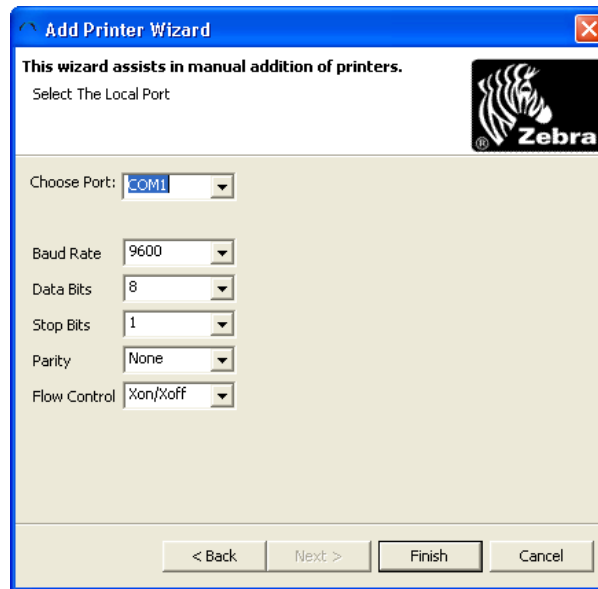

7. Click Finish.


In the Group Management window, the selected group contains the new printer.

Sort Printers and Groups

This feature allows you to sort by ascending alphabetical and numeric order in the Group Management window.

To sort the items in the Group Management window:

1. In the Group Management window, click Groups.

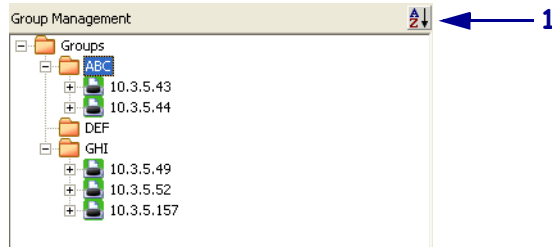

1	Sort button
---	-------------

2. Click the sort button in the Group management window.
The groups and printers sort alphabetically and numerically.


Printer Preferences

You can set up communications preferences for individual printers separately from the application preferences using the Printer Preferences function in ZebraNet Bridge Enterprise. You can also add individual notes to each printer, such as a firmware upgrade date or other printer information.

To set individual printer communication preferences:

1. In the Group Management window, right-click on a printer.
2. Select Preferences.
3. Click the Advanced tab.
4. Select Communications Settings.


The *Add Printer Wizard* dialog box opens.

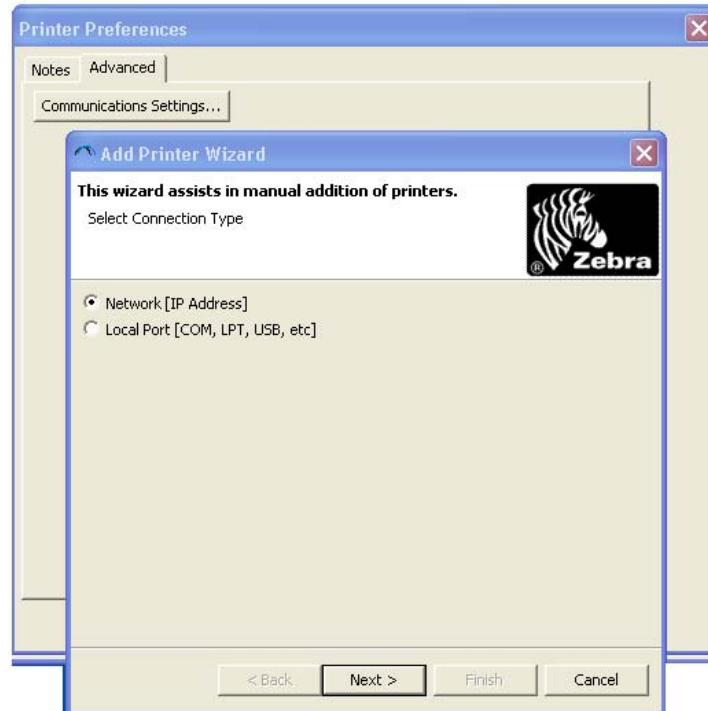

5. Select Network (IP Address).

6. Click Next.

The *Add Printer Wizard* dialog box opens.

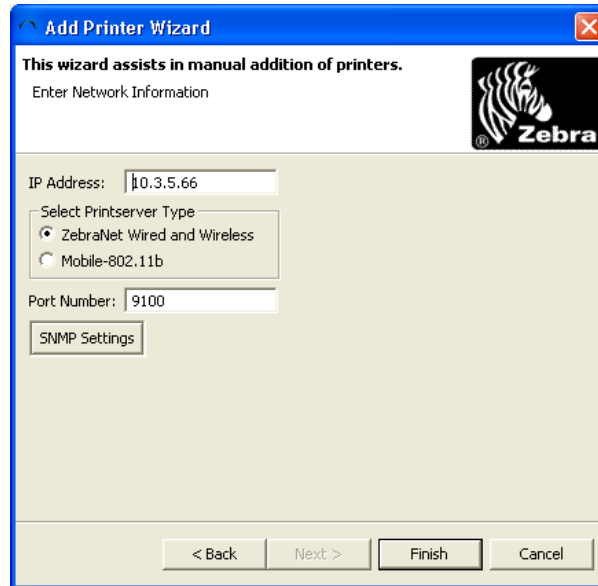


7. Change the port number.

8. Click Finish.

To create a printer note:

1. In the Group Management window, right-click on a printer.
2. Select Preferences.
3. Click the Notes tab.

The *Printer Preferences* dialog box opens.

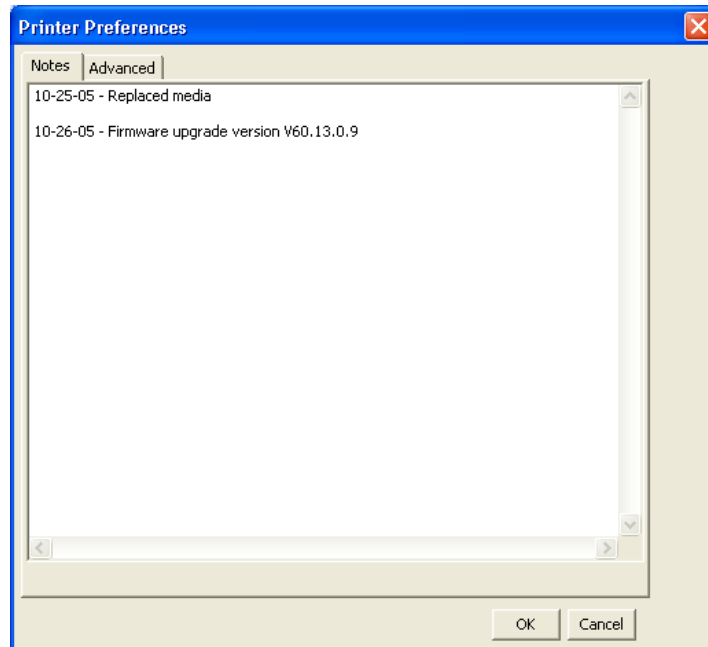

4. Type notes in the text area.
5. When you are finished, click OK.



Note • The text in the Notes section saves with the application. The application does not send this information to the printer.

Delete Printers/Groups

From the Group Management window, you can delete printers or groups of printers.



Important • Use this feature carefully. You immediately delete printers and groups from the Group Management window.

To delete a printer:

1. From the Group Management window, right-click on a printer.
2. Select Delete.
The printer that you select is deleted from the group.
3. To delete a group of printers, right-click on the group.
4. Select Delete.
The group that you select is deleted from the list.

Resource Management Window

The default location for the folders in the Resource Management window is `c:\program files\ZebraLink\ZebraNet Bridge\Resources`. You can change the location in the Resource Management window.

To change the location of the Resources window:

1. From the menu bar, select Preferences > Map Resource Directory.
2. Select the system folder to use for Resources or make a new folder.
3. When you are finished, click OK.



Note • If you already have a directory that contains Zebra printer files, you might want to set that folder as your Resource Management window directory.

Types of Objects

The Resource Management window includes default folders to help you manage files for your Zebra printers. Include only ZPL-supported or mobile printer files in these folders:

- Files
- Fonts
- Graphics
- Firmware
- Scripts



Note • Mobile and tabletop printers cannot share Object files.

Add Files

You can add files to a printer or printer group located in the Group Management window. If you receive a new file, such as a firmware file, you can add it to the appropriate group in the Resources window.

To Add a file to the Resources window:

1. Copy the file you want added to the Resources window.
2. In the Resources Management window, decide what folder or subfolder you want to add the new file to.
3. Right-click on the location.
4. Select Paste.



Example • You download a new firmware file from the Web and save it to C: drive. In Windows Explorer, you locate the new firmware file and copy it. You open ZebraNet Bridge. You paste the file into the folder in the Resources Management window.

Scripts

Scripts have special functions within ZebraNet Bridge. Placing files in the scripts directory of the Resource Management window makes the file available from the printer. Scripts are useful for repetitive actions or specific functions that are not included within the application.



Note • If scripts do not exist in the Resource/Scripts directory, the option does not appear in the printer list.

To Run a Script:

1. In the Group Management window, right-click on a printer.
2. Select Actions > Scripts.
3. Select the script file you wish to send to the printer.
The script is sent to the printer.

Profile Management Window



This feature is available only in the ZebraNet Bridge Enterprise licensed version.

You can create profiles for a *golden printer* or for critical printers on your network. Printer profiles are a copy of a printer stored on your PC. Ideally, the source printer has an optimal configuration. The configuration is a combination of printer settings, files, formats, or graphics that you wish to save. You can download this profile to one or many printers simultaneously to expedite an enterprise implementation. Or, you can save the profile in case of a critical printer failure. When replacing a failed printer, install the printer on the network and locate the printer through ZebraNet Bridge. Then copy the saved printer profile to the new printer.



Note • Printer profiles do not retrieve or save printer objects from Z : memory.



Important • There are two font types, .tte and .ttf, that are not retrieved from the printer.


Creating and Downloading Printer Profiles

To create a printer profile:

1. In the Group Management window, right-click on a printer.
2. Select Create Profile.

The application opens the *Task List* dialog box, reads the printer information, and creates the printer profile.

3. Your printer profile might already exist. In that case, a *Profile Warning* dialog box opens.

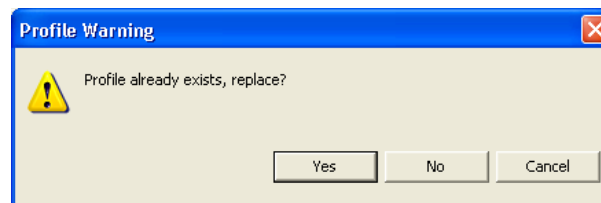

4. If the profile already exists, do you want to replace it?

If...	Then...
No	The application creates a new profile and appends the profile name with (X).
Yes	The application overwrites the printer profile with a new profile.
Cancel	Cancel the action.

The Profile Management window names the printer profile as follows:

Group Management Display Name	Profile Management Display Name
10.3.10.100	(Based on) 10.3.10.100
Warehouse1 (whose IP address is 10.3.10.100)	(Based on) 10.3.10.100

Exporting and Importing Printer Profiles

You can export and save printer profiles to your computer hard drive and import them into ZebraNet Bridge. You can save your printer’s configuration to a file, which can then be used in another instance of ZebraNet Bridge on your network. These profiles are also a diagnostic tool and could be helpful if you need to contact Technical Support.




Note • Printer profiles have a .zpp extension.

To export a printer profile from ZebraNet Bridge:

1. In the Profile Management window, right-click on a printer profile.
2. Select Export Printer Profile.

The *Export Printer Profile* dialog box opens.

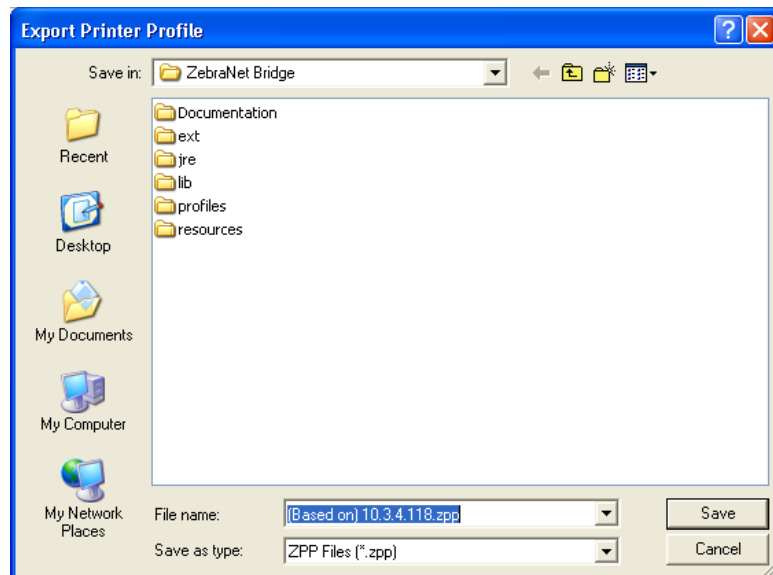


3. Enter the file name for the printer profile and browse to your desired location. (The default location is the ZebraNet Bridge root directory.) Click Save.

To import a printer profile into ZebraNet Bridge:


1. In the Profile Management window, right-click on the Profiles folder.
2. Select Import Printer Profile.

The *Import Printer Profile* dialog box opens.

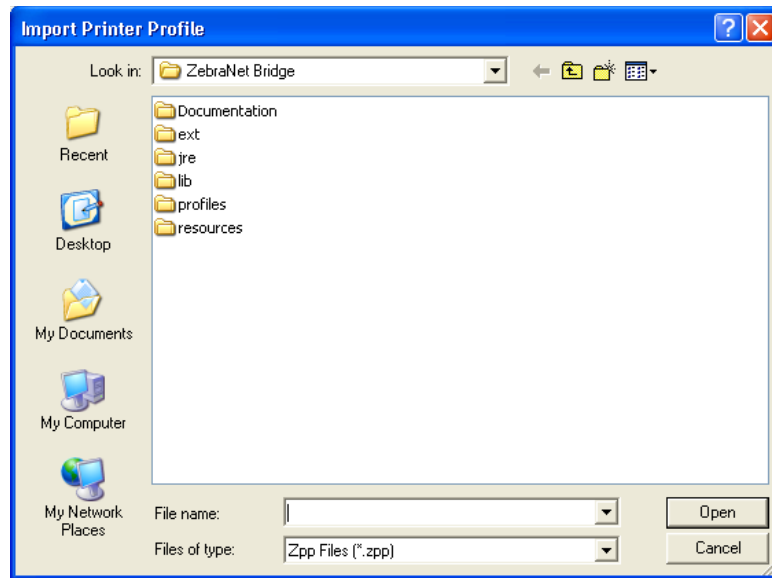

3. Browse to the location of your printer profile.
4. Select the file.
5. Click Open.

A printer profile for the printer might already exist in the Profile Management window. In that case, the *Profile Warning* dialog box opens.

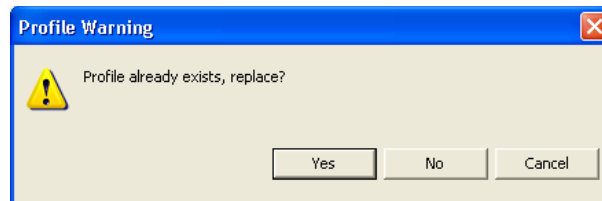

6. If the profile already exists, do you want to replace it?

If...	Then...
No	The application creates a new profile and appends the profile name with (X).
Yes	The application overwrites the existing printer profile with a new profile.
Cancel	Cancel the action.

Task List Dialog Box

The *Task List* dialog box identifies tasks and provides a progress bar for each task. Through the Task List, you may control or cancel any task. A task is a request from the application to a printer or group of printers.



Note • If you request a task for a group of printers, the tasks appear separately in the Task List for each printer.

To cancel a task:

1. In the *Task List* dialog box, locate the specific task.
2. To the right of the associated progress bar, click Cancel.

To remove a task from the Task List dialog box:

1. In the *Task List* dialog box, locate the specific task.
2. To the right of the associated progress bar, click Clear.

To clear all tasks from the Task List dialog box:


In the *Task List* dialog box, click Cleanup.

To open the Task List dialog box:

In the *Task List* dialog box, select Auto open when a task is added.

To manually launch the Task List window:

In ZebraNet Bridge Enterprise window toolbar, click the Task Manager icon.

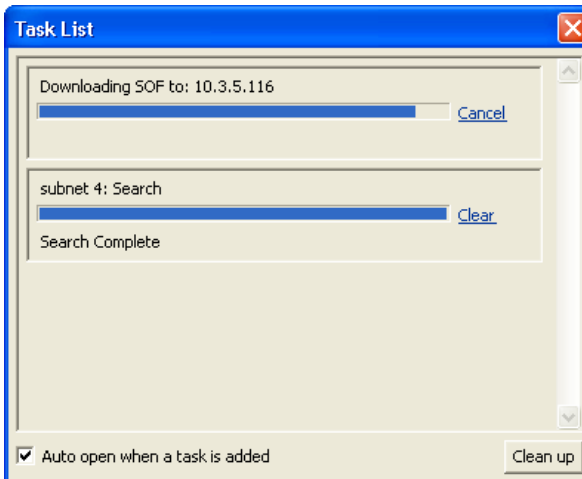

Multiple User Interface Configurations



This feature is available only in the ZebraNet Bridge Enterprise licensed version.


ZebraNet Bridge Enterprise supports multiple user interface configurations. This is useful for managing large groups of printers in various configurations. For example, you may want a different application configuration for each department or location.

Save a Configuration

To save a configuration:

1. Select File > Application Configuration > New.

The *New Configuration* dialog box opens.

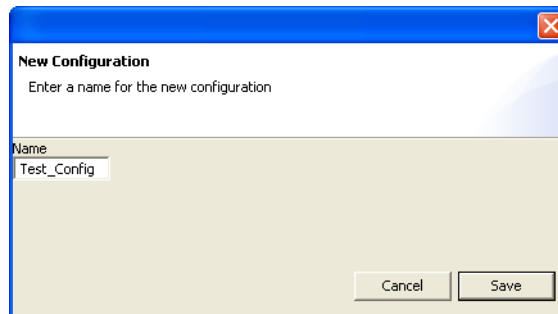

2. In the Name field, type the name of the new configuration.


3. Click Save.

A blank configuration loads with local search.

4. Make the desired changes to the configuration, such as creating new searches and groups.

5. Select File > Application Configuration > Save As.

The *Save Current Configuration* dialog box opens, and defaults to the current configuration.

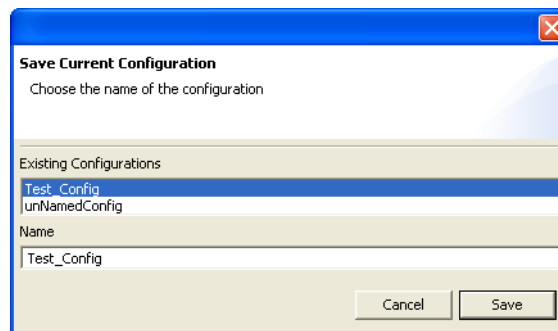

6. To give the modified configuration a new name, enter the new configuration name in the Name box.

7. Click Save.


Open a Specific Configuration

When you have multiple configurations that have been saved, you can select which configuration you want to load each time you open the application. For more information, see [Program Startup on page 28](#).

To open a specific configuration:

1. Select File > Application Configuration > Open.

The *Open Configuration* dialog box opens.

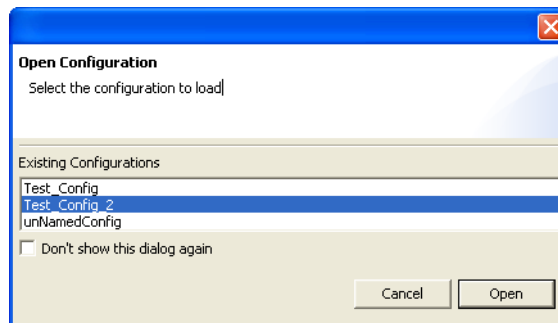

2. Select the configuration you want to load. If you want to load the default configuration, enable the check box.

3. Click Open.

The selected configuration loads.



Printer Management

This chapter tells you how to use advanced features to manage printers in your network environment.

Contents

Change Settings	62
Change Printer Settings	62
Change Print Server Settings	63
Copy Configurations	64
Copy Printer Settings	64
Copy Print Server Settings	64
Copy Objects	65
Copy Alerts	65
Copy All	66
Copy Printer Configuration to a Group	67
Download (from Resource Management window)	68
Download Firmware to a Printer	68
Download Objects to a Printer	69
View and Edit Text Objects	70
Hard Actions	71
Reset the Printer to Factory Defaults	71
Reset the Print Server to Factory Defaults	71
Reset the Printer to Save Settings	71
Reset the Print Server to Save Settings	72
Print a Configuration Label	72

Change Settings

This section shows you how to change settings and how to copy settings between devices. When a setting is changed in the application, it is marked with a “>” next to the setting in the printer tree. Settings must be saved to take effect on the printer. Changes from ZebraNet Bridge override changes from the control panel. To view your changes after a save, refresh the printer. These are the settings you can change:

- Printer
- Print server
- Alerts

Change Printer Settings



Important • Before you begin changing settings, print out a printer configuration label. For details, see [Print a Configuration Label on page 72](#).

To change the settings of a printer:

1. From the Group Management window, expand the printer that you want to change.
This will retrieve the printer settings.
2. Expand the subfolder that contains settings that you want to change.
3. In the Value column, select the field that you want to change.
4. Double-click on the field.
Some settings have a list to choose from; other settings have a value to change.
5. Change the settings.
6. To save the settings, select the printer.
7. Right-click and select Save.
A warning confirms that you want to save changes.
8. Are you sure you want to save the changes?

If...	Then...
No	Select No.
Yes	Select Yes.

Change Print Server Settings

To change the print server settings:

1. Open the Group Management window. Expand the printer whose print server settings you want to change.
2. Expand the print server subfolder.



Note • When viewing settings for both printer and print server settings:

- editable fields are black
- non-editable fields are gray

3. Change the settings.
4. To save the settings, right-click the select the printer.
5. Select Save.
A warning confirms that you want to save changes.
6. Are you sure you want to save the changes?

If...	Then...
No	Click No, and try again.
Yes	Click Yes.

Copy Configurations

This section shows you how to copy printer and print server configurations between printers. Configuration components that you can copy from one printer to another include:

- Printer settings
- Print server settings
- Software objects (files, fonts, graphics)
- Alerts

Copy Printer Settings

This option copies settings from one printer to another.



Important • Copy settings and objects between the same printer models only. For example, if you copy the settings from a *Xi-Series* to a *Z-Series* printer, the *Xi-Series* settings could leave the *Z-Series* printer in an unexpected state.

To copy the settings of one printer to another:

1. From the Group Management window, right-click on the source printer.
2. On the pop-up menu, select Copy.
3. Right-click on the target printer.
4. Select Paste > Printer Settings.

The *Task List* dialog box shows the task progress.

Copy Print Server Settings

This option copies the settings from one print server to another.

To copy the settings of one print server to another:

1. From the Group Management window, right-click on the source printer.
2. On the pop-up menu, select Copy.
3. Select the target printer that you want to copy the settings.
4. Right-click.
5. Select Paste.
6. From the Paste menu, select Print Server Settings.

The *Task List* dialog shows the task progress.

Copy Objects

This option copies objects in one printer's memory to another printer. Objects include fonts, graphics, and files.



Note • Files from printers with firmware older than x.13.0.6 are incompatible with newer printers. For best results, copy objects only between printers with the same firmware version. You may not retrieve or copy converted .ttf or .ttr font files from printers with firmware version V60. Download these files from the Resources Directory.



Important • The Copy Objects action replaces all objects on the target printer. You are copying the objects from the source printer. If you do not want to remove files from the printer, use the Download feature.

To copy objects from one printer to another:

1. From the Group Management window, right-click on the source printer.
2. Select Copy.
3. Right-click on the target printer.
4. Select Paste > Objects.

The *Task List* dialog box shows the task progress.

Copy Alerts

This option copies alerts from one printer to another.



Important • Printer alerts will only copy alerts to printers that have the same firmware.

To copy the Alerts:

1. From the Group Management window, right-click on the source printer.
2. On the submenu, select Copy.
3. Select the target printer from which you want to copy settings.
4. Right-click.
5. Select Paste.
6. From the Paste menu, select Alerts.

The *Task List* dialog box shows the task progress.

Copy All

This option copies printer settings and print server settings, objects, and alerts to the target printer.



Important • Use this option only when configuring new printers or when source and target printers are identical. For example, you can copy between two printers of the same model type with the same firmware.

To copy an entire printer configuration from one printer to another:

1. From the Group Management window, right-click on the source printer.
2. Select Copy.
3. Right-click on the target printer.
4. Select Paste > All Settings, Objects, and Alerts.


The *Task List* dialog box shows the task progress.

Copy Printer Configuration to a Group

This option allows you to copy a configuration from one printer to a group of printers in the Group Management Window. For more information, see [Copy Printer Wizard on page 121](#).

1. In the Group Management window, right-click a printer.
2. Select Copy.
3. Right-click a group.
4. Select Paste > Clone printer to group.

The *Copy Printer Wizard* dialog box opens with the source and target printers populated.

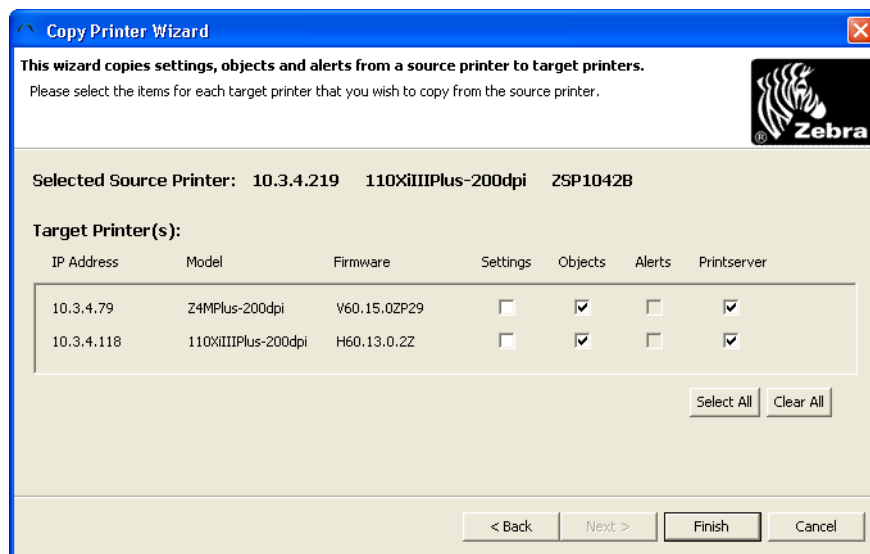

5. Select the desired settings.
6. Click Finish.

Download (from Resource Management window)

This section assumes that files already reside in the Resource Management window.

Download Firmware to a Printer

This section tells you how to download firmware to a printer. If you need a new version of firmware, download it at <http://www.zebra.com>.



Note • Putting the printer in a Firmware Download mode may require special procedures.

To download firmware to a printer using ZebraNet Bridge:

1. From the Resource Management window, select the firmware version (file) that you want to download.
2. Right-click on the firmware file you want.
3. Select Copy.
4. Right-click on the target printer. (This is the printer that you are sending firmware to.)
5. Select Paste > Send copied files to printer(s).
A warning dialog box opens and prompts you to download or not.
6. Do you want to download the firmware to the target printers?

If...	Then...
No	Click No.
Yes	<ol style="list-style-type: none">1. Click Yes.2. When the download is complete, click Exit.

Download Objects to a Printer

You store objects as files locally on your computer. Objects include these types of files:

- *.zpl
- *.zpf
- firmware
- fonts
- graphics
- scripts



Important • Your physical drive stores objects as files. If you delete the files, they are removed from your computer.

To download objects to a printer or printers:

1. From the Resource Management window, select files that you want to download to the printer.
2. Right-click the files.
3. Select Copy.
4. From the Group Management window, right-click the printer you want to download files to.
5. Select Paste > Send copied files to printer(s).
A confirmation dialog box opens and prompts to download or not.
6. Do you want to download the object to the target printers?

If...	Then...
No	Click No.
Yes	<ol style="list-style-type: none"> 1. Click Yes. 2. When the download is complete, click Exit.

View and Edit Text Objects

You can view and edit text files that store in your printer's memory. Edited files save to the Resource directory in the Resource Management window.

To view and edit printer text files:

1. From the Group Management window, expand a printer and navigate to Memory Devices.
2. Select a memory location and expand its tree.
3. Select the printer memory location for the file.
4. In the Contents window, double-click the file name you want to view or edit.

The file from the printer opens in your default text editor. The file also saves to the root directory of the Resource Management window.

Hard Actions

This section provides you with steps for performing the following actions:

- [Reset the Printer to Factory Defaults on page 71](#)
- [Reset the Print Server to Factory Defaults on page 71](#)
- [Reset the Printer to Save Settings on page 71](#)
- [Reset the Print Server to Save Settings on page 72](#)

If printer or print server settings get corrupted, you can reset devices to factory defaults.



Important • To reset a USB-based printer, you must power-cycle the printer.

Reset the Printer to Factory Defaults

To reset the printer to the factory defaults:

1. From the Group Management window, right-click on the source printer.
2. Select Action > Default Settings > Printer (factory).

Reset the Print Server to Factory Defaults

To reset the print server to the factory defaults:

1. From the Group Management window, right-click on the printer you want.
2. Select Action > Default Settings > Print Server (factory).

Reset the Printer to Save Settings

To reset the printer:

1. From the Group Management window, right-click on the printer you want.
2. Select Action > Reset > Printer.

Reset the Print Server to Save Settings

To reset the print server:

1. From the Group Management window, right-click on the printer you want.
2. Select Action > Reset > Print Server.

Print a Configuration Label

A configuration label displays significant information about a printer. A printer's configuration label information also appears in the printer's settings, Content tab.

To print a printer configuration label:

1. From the Group Management window, right-click on the source printer.
2. Select Action > Print Printer Config Label.



Printer Alerts, Monitoring, and Troubleshooting

There are several tools available to help you monitor and troubleshoot printers in your enterprise network. This chapter tells you how to use these advanced features to manage printers in your network environment.

Contents

Printer and Print Server Alerts	74
Configuring Printer Alerts	74
View Printer and Print Server Alerts	75
Clear Alerts Log	76
Status Icons	77
Status Tab	77
Summary Tab	80
Visual Alerts	81
Default View	81
Before You Begin	81
Configure Visual Alerts Tab	81
Monitor Alerts with the Visual Alerts Tab	83
Compare Printers	87
Communications Window	88

Printer and Print Server Alerts

Alerts give you the ability to proactively manage your Zebra printer and print server. Suppose that the printer or print server has an error. The given device can be configured to send out alerts and ZebraNet Bridge writes the alerts to a log file. These alerts notify you of printer or print server conditions.

As soon as ZebraNet Bridge receives an alert, the alert appears in the Events tab. If you have not viewed the alert yet in the Events tab, the box in the status bar at the bottom of the application shows:

- New alert
- Alert type
- Alert severity by color

You can configure ZebraNet Bridge to notify you by blinking the application tab in the task bar.



Important • ZebraNet Bridge only logs alerts that occur while the application is running.

Configuring Printer Alerts

To set printer alerts, use the following communication protocols:

- Email
- Serial
- SNMP
- TCP
- UDP
- USB

To configure a printer alert:

1. In the Group Management window, expand the printer on which you want to set an alert. ZebraNet Bridge retrieves the settings from the printer.
2. Select the Alerts subfolder and expand it by clicking on the +.
3. Select the alert that you want to set and expand the alert options by clicking on the +.
4. Select the communication protocol.
5. Enable Set or Clear in the Contents tab.



Note • ZebraNet Bridge Enterprise only monitors and logs printer and print server alerts using SNMP on port 162 and TCP. The application allows you to set up other printer and print server alerts.

6. If applicable, insert the address and port.
Some settings have a list to choose from. Other settings have a value to change.
7. To save the settings, right-click on the printer.
8. Select Save.
A warning confirms that you want to commit to changes.
9. Are you sure that you want to make the changes?

If...	Then...
No	Select No.
Yes	Select Yes.

For more details on setting alerts, see the ZPL II Programming Guide.

View Printer and Print Server Alerts

The Events tab provides a log of printer and print server alerts received by the application. Events may be viewed by group or by printer and may be sorted by printer name, IP address, date/time received, severity, or trigger.

To view alerts:

1. In the Group Management window, select a group or printer whose event you want to view.
2. In the Contents window, select the Events tab.

Printer Name	Address	Date/Time	Severity	Trigger
ZBR508...	10.3.5.65	Wed Apr 12 17:01:37 GMT 2006	Warning	Cold Start
ZBR508...	10.3.5.65	Wed Apr 12 17:02:17 GMT 2006	Warning	Cold Start
ZBR508...	10.3.5.65	Wed Apr 12 17:07:14 GMT 2006	Warning	Cold Start
ZBR508...	10.3.5.65	Wed Apr 12 17:02:19 GMT 2006	Urgent	Printer Off-Line
ZBR508...	10.3.5.65	Wed Apr 12 17:07:15 GMT 2006	Urgent	Printer Off-Line
ZBR508...	10.3.5.65	Wed Apr 12 17:02:19 GMT 2006	Info	Printer On-Line
ZBR508...	10.3.5.65	Wed Apr 12 17:02:19 GMT 2006	Info	Printer On-Line
ZBR508...	10.3.5.65	Wed Apr 12 17:07:15 GMT 2006	Info	Printer On-Line
ZBR508...	10.3.5.65	Wed Apr 12 17:07:15 GMT 2006	Info	Printer On-Line

3. To sort events by printer name, IP address, date/time received, severity, or trigger, double-click the column headings.

For more information, see [View Filter – Events Tab on page 32](#).


Clear Alerts Log

When the number of unsolicited alerts increases significantly, alerts may be difficult to view. The application might slow when loading the alert log file.

To clear the alert log:

1. From the menu bar, select Tools > Clear Alert Log.

The *Clear Alert Log* dialog box opens.

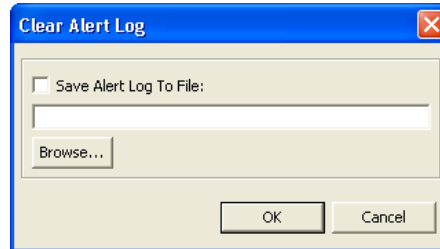

2. Do you wish to save the current alert log file?

If...	Then...
No	Click OK.
Yes	Enable the Save Alert Log To File check box and save the file.

The active alert log and the *Event* tab of the Content window clears.

Status Icons

Status icons in the Group Management Window provide at-a-glance status information about your printers and print servers.

Status icons are updated by the application heartbeat. The application heartbeat can be set from 1 to 120 minutes, or set to off. The default setting is 5 minutes. Turning the application heartbeat off will result in the printer icons being white. You can set the application heartbeat from the *System Settings* dialog box in the Preference menu.

Status icons use these color codes:

- **Green** indicates no errors detected.
- **Yellow** indicates warning conditions detected.
- **Red** indicates urgent errors detected.
- **White** indicates that the printer is not detected by the application.

Status Tab


The Status tab provides status of your Zebra printers. The status types are:

- **Quick Status** appears as soon as you select the status tab. It provides a high-level view of the print server status and is updated by the application heartbeat.
- **Detailed Status** is empty when you select the Status tab. When you click Refresh, this panel reports printer status. Printer error conditions are displayed with a red background.
- **Port Status** updates when you click Refresh. This panel includes information on the print server ports.

To view the status of a printer:

1. From the Group Management window, select a printer that you want to check.
2. In the Content window, click the Status tab.

The *Status* tab opens.

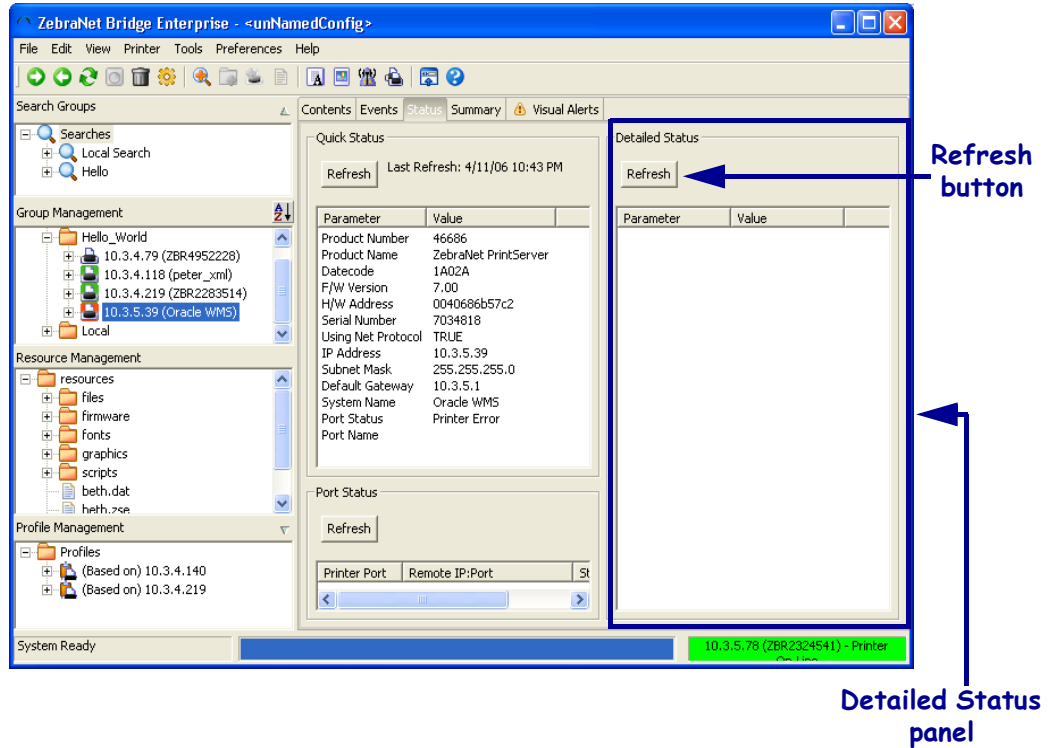


Important • To minimize network traffic, the Detailed Status panel does not update automatically.

When printer port 9100 has an active connection, you cannot update Detailed Status.

3. What type of status do you wish to view?

If you want to view...	Then...
Print Server Status	<ul style="list-style-type: none"> In the Quick Status panel, click Refresh. The Quick Status updates with the heartbeat of the application.
Printer Status	<ul style="list-style-type: none"> In the Detailed Status panel, click Refresh. The Detailed Status panel is updated with selected status details from the printer.
Port Status	<ul style="list-style-type: none"> In the Port Status panel, click Refresh.

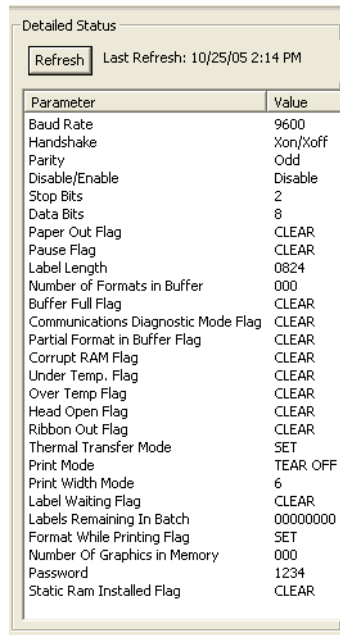

Summary Tab

The Summary tab provides a print server status summary of all printers in the Group Management Window similar to ZebraNet Utilities. Printer and print server settings may not be changed in the Summary tab.

Contents Events Status Summary Visual Alerts										
IP Address	Serial #	Subnet Mask	Default Gateway	Product Type	Product #	Datecode	System Name	Port Status	Port Name	
10.3.4.79 (Ovi)	2140377	255.255.255.0	10.3.4.1	ZebraNet PrintServer	46686	3111A	Ovi	Online		
10.3.4.118 (peter_xml)	2324549	255.255.255.0	10.3.4.1	ZebraNet PrintServer	46688	6066A	peter_xml	Online	blah	
10.3.4.219 (ZBR2283514)	2283514	255.255.255.0	10.3.4.1	ZebraNet PrintServer	46688	4267A	ZBR2283514	Online		
10.3.5.39 (Oracle WMS)										
10.3.5.52 (ZBR2414407)	2414407	255.255.255.0	10.3.5.1	ZebraNet PrintServer	46686	3111A	ZBR2414407	Online		
10.3.5.65 (ZBR5088903)	2325452	255.255.255.0	10.3.5.1	ZebraNet PrintServer	46688	5353A	ZBR5088903	Online		
10.3.5.49 (ZBR2123401)	2324539	255.255.255.0	10.3.5.1	ZebraNet PrintServer	46688	4008A	ZBR2123401	Online		

To view a group, in the Group Management window select the group you to view and click on the Summary tab.

Visual Alerts



This feature is available only in the ZebraNet Bridge Enterprise licensed version.

Visual Alerts allow you to view and centrally manage your printers in a graphical representation of your network, whether on the manufacturing floor, in a distribution center, cross-docking facility, or scattered around the globe in multiple facilities. With the ability to drill down through locations to identify trouble printers, you can monitor your top level groups and receive visual notification of issues, before they become problems.

Visual Alerts work in concert with Printer Alerts. You can customize the application to your company's needs.



Example • If you want to monitor paper out conditions for manufacturing floor printers, you could set up the printer alerts for Paper Out using SNMP. The application monitors SNMP traps for printer alerts. If the Visual Alerts tab is configured, you are graphically alerted to a Paper Out condition for all your manufacturing floor printers.

Default View

Selecting printers and groups in the Group Management window with the Visual Alerts tab selected displays the printers, by default. This is considered the starting point for Visual Alerts configuration.

Before You Begin

It is recommended that you configure printers in their appropriate management groups in the Group Management window before attempting to configure Visual Alerts. By doing so, you significantly reduce the time required to configure Visual Alerts.



Note • The preferred way to configure Visual Alerts is to begin with the top level group in the Group Management window, and then move down through the appropriate management groups.



Important • It is recommended that you save the graphic files that you intend to use in the application's Resource Management window.

Configure Visual Alerts Tab

It is recommended that you follow these instructions from the top-down for configuration of Visual Alerts.

To add a background image to a group:

1. In the Group Management window, select the top level group.

2. Select the *Visual Alerts* tab.

The content of the selected group appears in the upper left-hand corner of the Visual Alerts tab in the form of folders for groups and printer icons for printers.



Note • The title bar of the Visual Alerts tab contains the name of the selected group in the Group Management window.

3. Right-click in the group map area of the Visual Alerts tab.

4. Click on **Select Background Image**.

The *Open* dialog box opens.

5. Browse to the location of your background graphic file.

6. Select the file.

7. Click **Open**.

The graphic is displayed in the group map area of the Visual Alerts tab.

8. Drag and drop the sub-groups (or printers) to the appropriate place in your graphic.

9. In the Group Management window, select a second-level group or double-click on the group's folder in the Visual Alerts tab map area.

The content of the second-level group appears in the upper left-hand corner of the *Visual Alerts* tab. It shows folders for groups and printer icons for printers.

10. Right-click in the group map area of the Visual Alerts tab.

11. Select **Background Image**.

The *Open* dialog box opens.

12. Browse to the location of your second-level background graphic file.

13. Select the file.

14. Click **Open**.

The graphic is displayed in the group map area of the Visual Alerts tab.

15. Drag and drop the sub-groups (or printers) to the appropriate place in your graphic.

16. Repeat this process for each sub-group until finished.



Note • Leaving the Visual Alerts tab or moving to another group in the Group Management window automatically saves all changes to your Visual Alerts tab group map.

Monitor Alerts with the Visual Alerts Tab

These instructions show the recommended method for monitoring and troubleshooting your printers using the Visual Alerts tab.

Using the Visual Alerts configuration applied in the Configure Visual Alerts tab area of this chapter, we will follow an alert received in the VH DC group.

To monitor printers using the Visual Alerts tab:


1. In the Group Management window, select the top level group and select the *Visual Alerts* tab.



Note • Selecting the top-level group organizes and presents information for all received Visual Alerts, regardless of which management sub-group the printers reside in the Group Management Window. If you do not have the Visual Alerts tab open when an alert is received an icon appears next to the text on the Visual Alerts tab.

When a printer or print server alert is received by the application, the appropriate management sub-group will begin to flash in the Visual Alerts group map area.

This illustration shows a flashing sub-group.

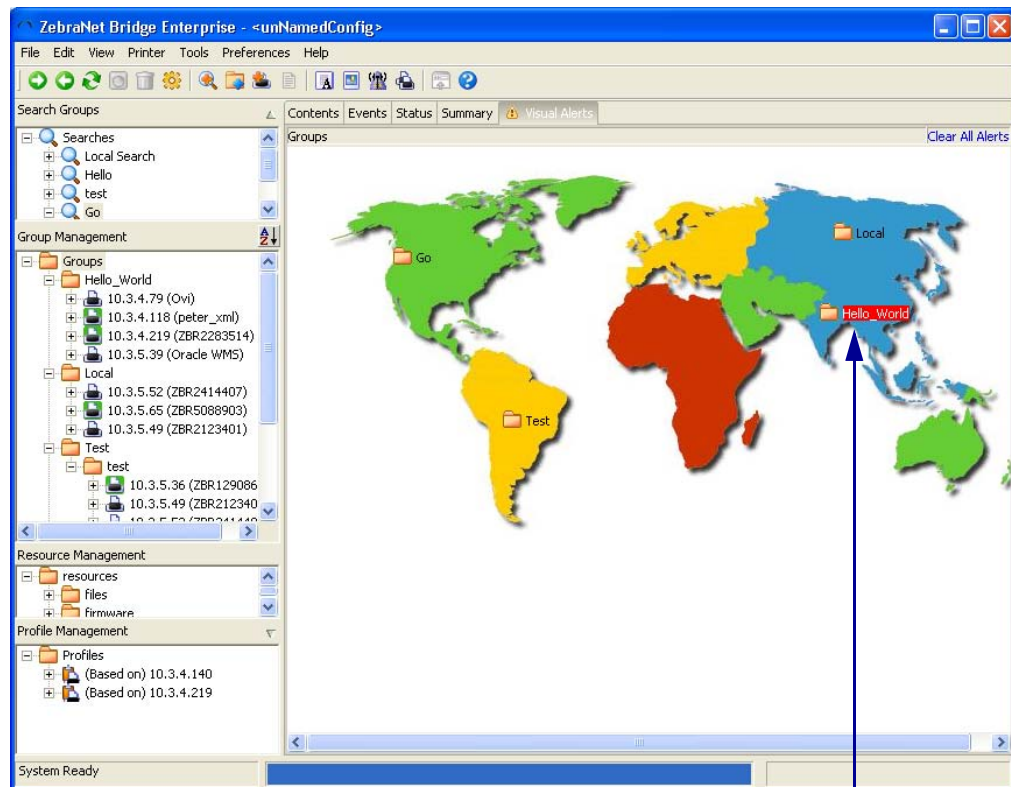


1

1	Flashing Sub-Group
---	--------------------

2. Double-click the flashing sub-group.

The sub-groups Visual Alerts group map opens. The printer that received the alert flashes.


This illustration shows a flashing printer.

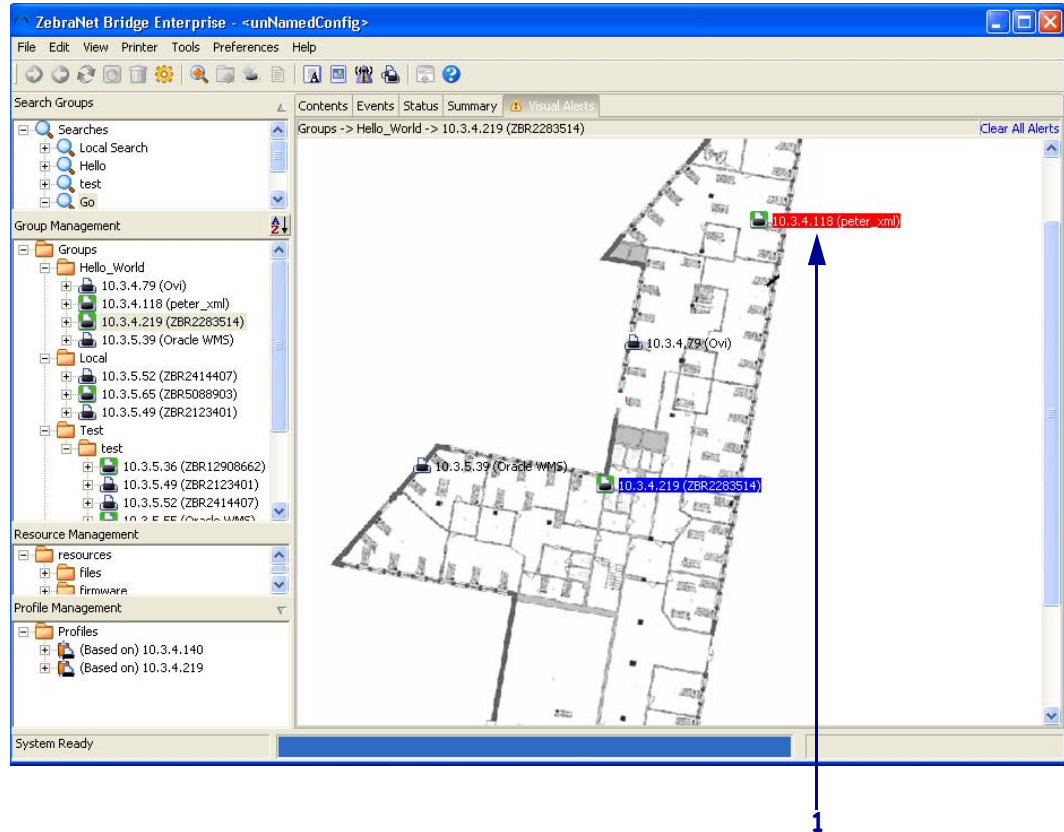

1 | Flashing Printer

3. Double-click the flashing printer.

The *Alert Notification* dialog opens next to the printer. Information is displayed the dialog box for all received alert(s).

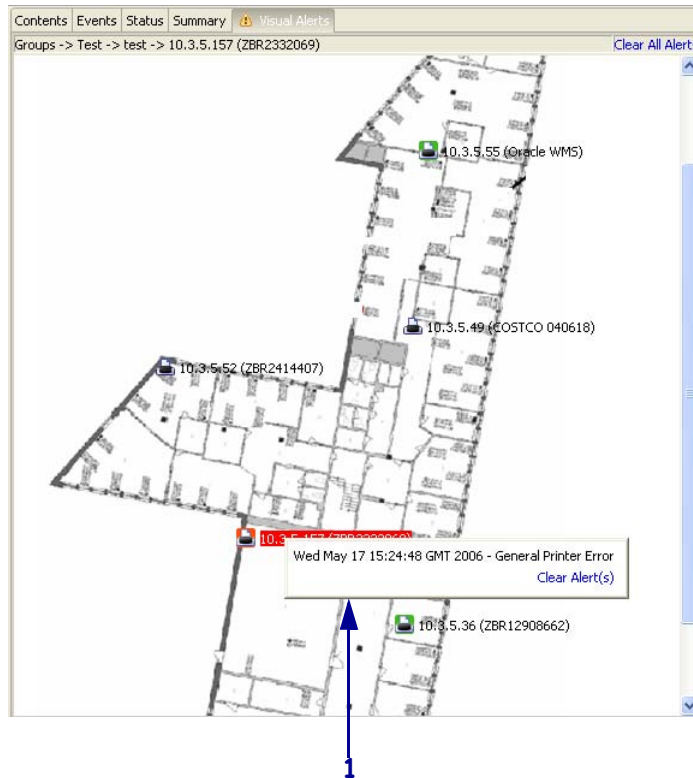


1	Alert Notification dialog box
----------	-------------------------------

- To clear the alert and stop the flashing printer and sub-group, click **Clear Alert(s)**.
- To clear printer alerts for all printers, in the upper-right-hand corner of the Visual Alerts tab, click **Clear All Alerts**.

- To troubleshoot printer issues further, look at the printer in the *Status* tab to determine the issue before deploying resources to a remote location.

The *Status* tab looks like this:

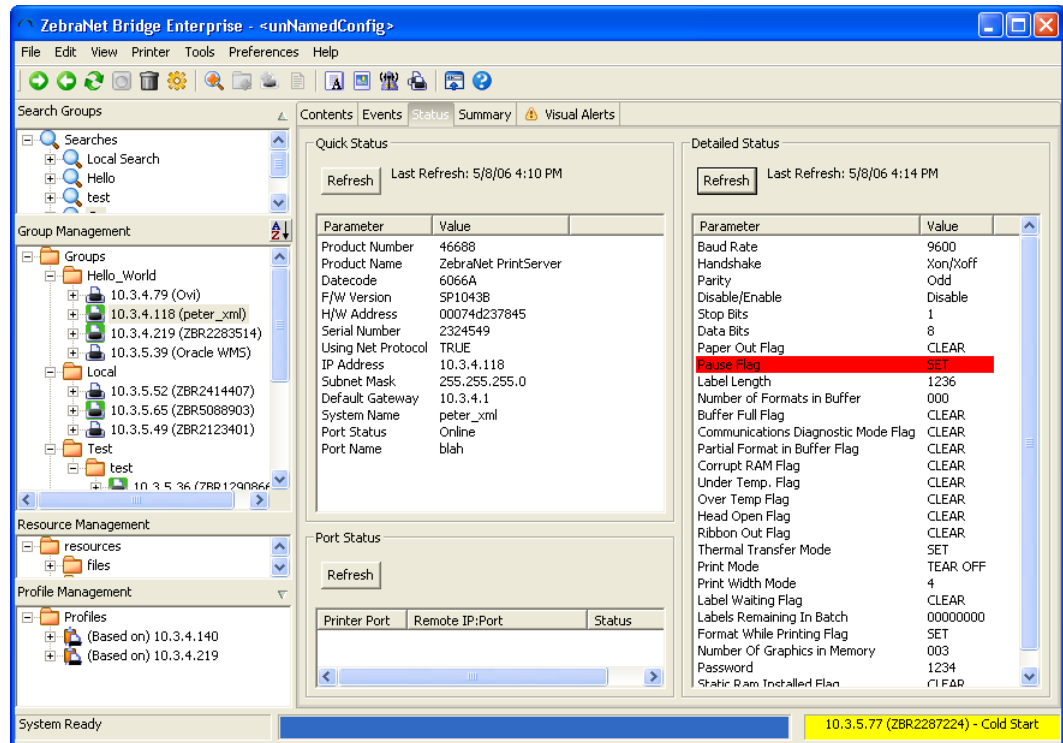


Compare Printers

The compare printers tool allows you to see the differences between two printers.

To compare printers:

1. In the Group Management window, right-click the first printer you want to compare.
2. Choose Select Left Side to Compare.
3. Right-click the second printer for the compare.
4. Select Compare to "ip address".

The *Compare Printers* dialog box opens:

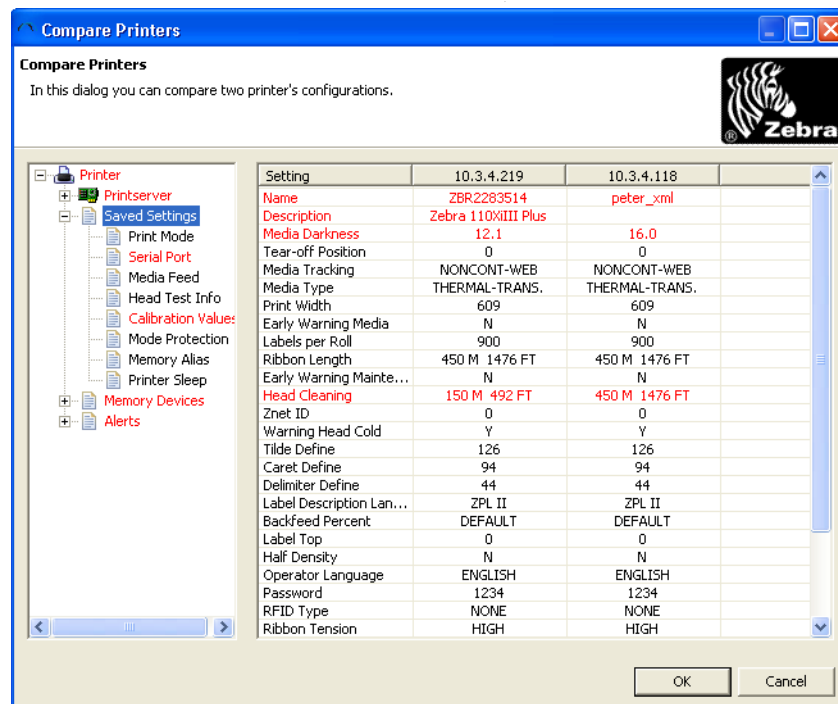

5. In the left column, expand the printer tree.

The printer and print server settings trees open. Expanding items in the printer tree shows the settings of the selected printers. Red text identifies differences in the printer set up.


Communications Window

The Communications Window opens to a TCP/IP socket connection to a printer over port 9100 (or other port, if specified) and is provided as another tool to communicate with a given printer and view the printer's response. The Communications Window allows you to send ZPL and various files to the printer and displays the printer response.

To send ZPL or other commands to the printer:

1. In the Group Management Window, right-click a printer.
2. Select Comm. Window.

The *Communications Window* dialog box opens and a connection to the printer is established.

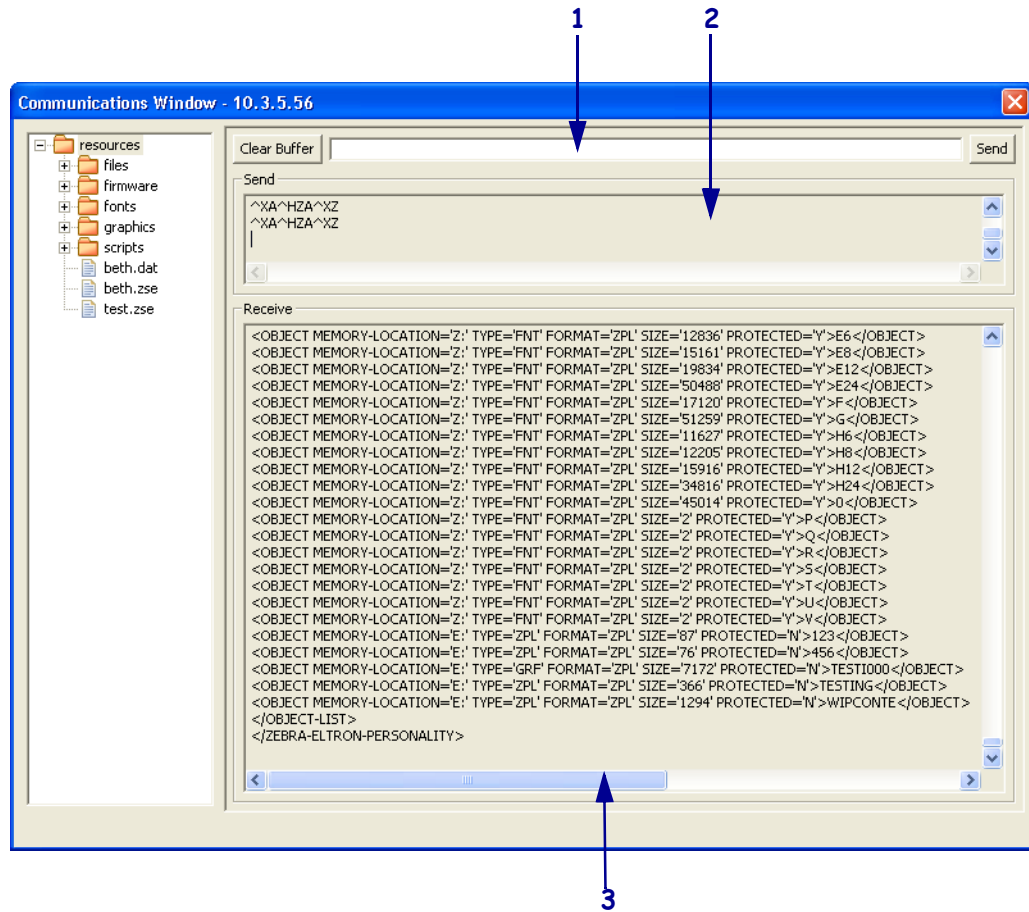

1	Send box
2	Send pane
3	Receive pane

3. What do you want to send?

If...	Then...
ZPL	<ol style="list-style-type: none"> 1. In the Send box, type in the code. 2. Click Send.
A file from the left pane	<ol style="list-style-type: none"> 1. Find the file you want to send to the printer. 2. Drag it into the send pane and release it. <p>It sends the given file to the selected printer. In the Receive pane, you might see the activity of the given file.</p>

When you close the Communications Window, the connection to the printer is also closed.



Note • After a period of time without activity, the printer will close the active connection. To re-establish the connection, close the Communications Window and re-open it.



Notes • _____




Tools

This chapter describes the ease-of-use tools and wizards in ZebraNet Bridge.

Contents

Font Wizard	92
Import/Convert Fonts Tab	92
Link Font Tab	96
DAT Editor Tab	98
View Font	100
Launch Character Editor	102
Graphics Conversion Wizard	104
Wireless Setup Wizard	110
Before you begin	110
Stationary ZebraNet Wireless Print Server Setup	110
Mobile Wireless Setup	117
Copy Printer Wizard	121

ZebraNet Bridge tools and wizards aid in deploying and managing your printers. These tools are in the Tools menu, as follows.



Font Wizard

Font files must be converted to a supported format in order to use them with your Zebra printer. ZebraNet Bridge can convert, store, and download these font files.

Import/Convert Fonts Tab

The Import/Convert Font tab allows you to:

- download a font file
- convert the file to one of three filetypes
- send the .zpl file to selected printers
- save the file anywhere on your computer

The filetypes available are dependent on the current firmware version on your target printer.


To determine firmware requirements, see the table below.

File Extension	Firmware Version Requirements
.ttf (Default)	X.13 firmware or higher
.ttr and .ttf	X.14 firmware or higher
.fnt	all ZPL firmware versions

To convert and download a TTF font:


1. From the menu bar, select Tools > Font Wizard.

The *Font Wizard* dialog box opens.

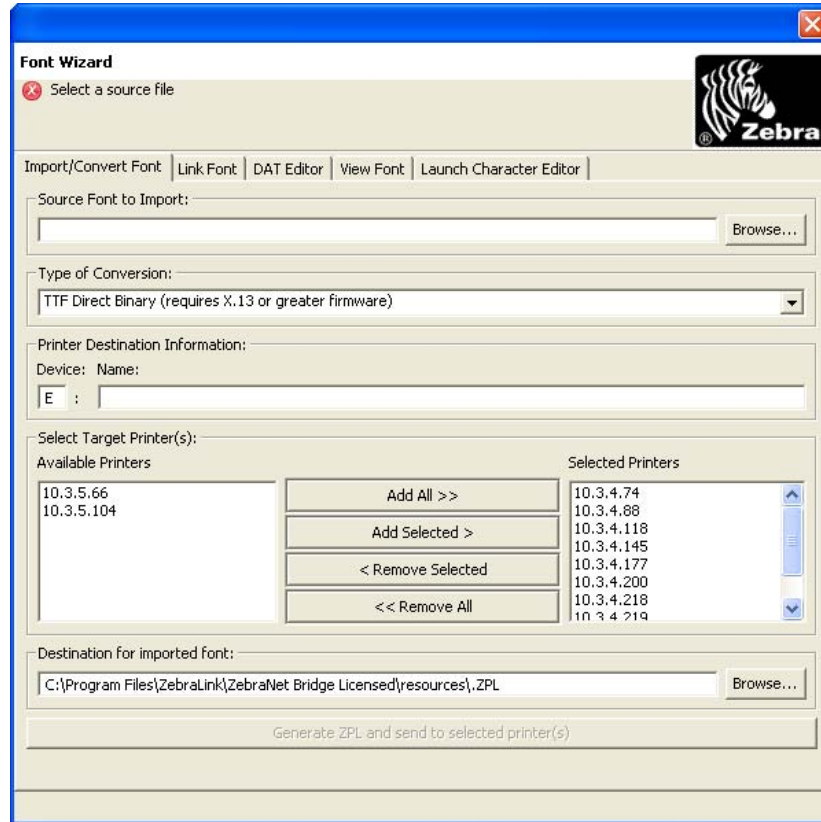

2. Click Browse.

The *Open Font to Import* dialog box opens.

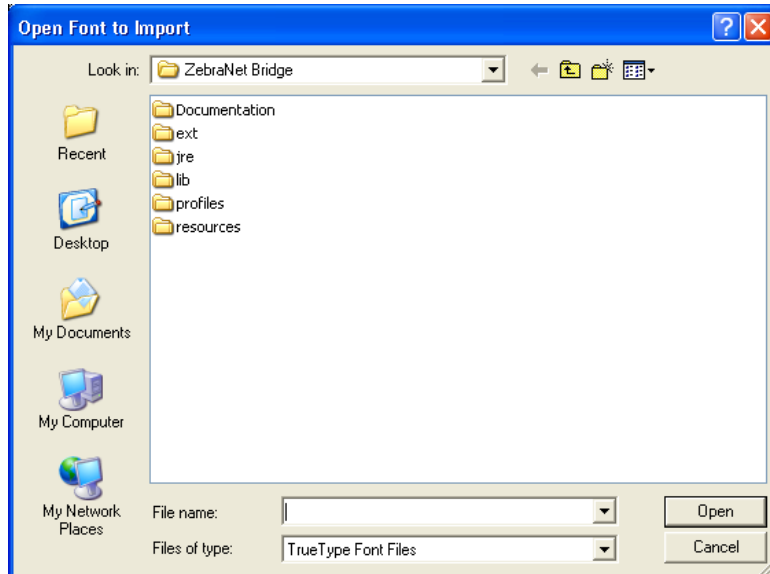

3. Browse to the location of the font that you wish to import.


4. Click Open.



Note • If you are in the Windows\Font directory, selecting the font name does not populate the file name field. You must type in the file name.

5. In the Type of Conversion list, select the conversion type.

The drop-down menu opens

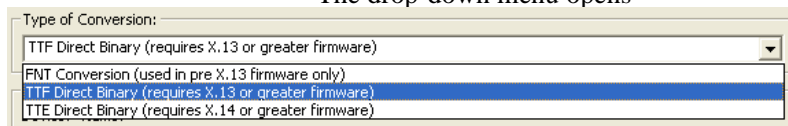

Note • All ZPL printers can use FNT conversion. Printers with firmware version X.13 or greater can use the TTF Direct Binary conversion type.

The Printer Destination area gives the location and name of the file on your printer. The default destination is E : memory, which is the available flash memory location.

6. Change the default destination if desired.

7. Enter a name for the font.

The Select Target Printer(s) area of the *Font Wizard* dialog box selects printers to receive fonts. This step is not a requirement, but allows you to convert a font and download it simultaneously.

8. Select printers in the Available Printers area.

9. To move printers into the Selected Printers area, click Add Selected> or click Add All >>.

10. To remove printers from the Selected Printers area, select printers in the Selected Printers area.
11. Click < Remove Selected or click << Remove All.
12. In the Destination for Imported font area, click Browse to navigate to the desired location. The default location is the Resources\Fonts directory in the ZebraNet Bridge Resource Management window.
13. To complete the font import, click Generate ZPL and send to selected printer(s).

Link Font Tab

The Link Font tab allows you to:

- link multiple fonts
- generate a simple .zpl file
- send it to printer(s)

For example, if you have customized characters, previously stored as a .tte or .ttf file, enter a base font name and up to five linked font names.




Note • The Link Font tab generates a simple .zpl file, but does **not** send fonts to the printer. The printer must already have these fonts stored in memory. To send fonts to the printer, use the Import/Convert Font tab.

To link font files:

1. From the menu bar, select Tools > Font Wizard.
2. Select the Link Font tab.

The *Link Font* tab opens.

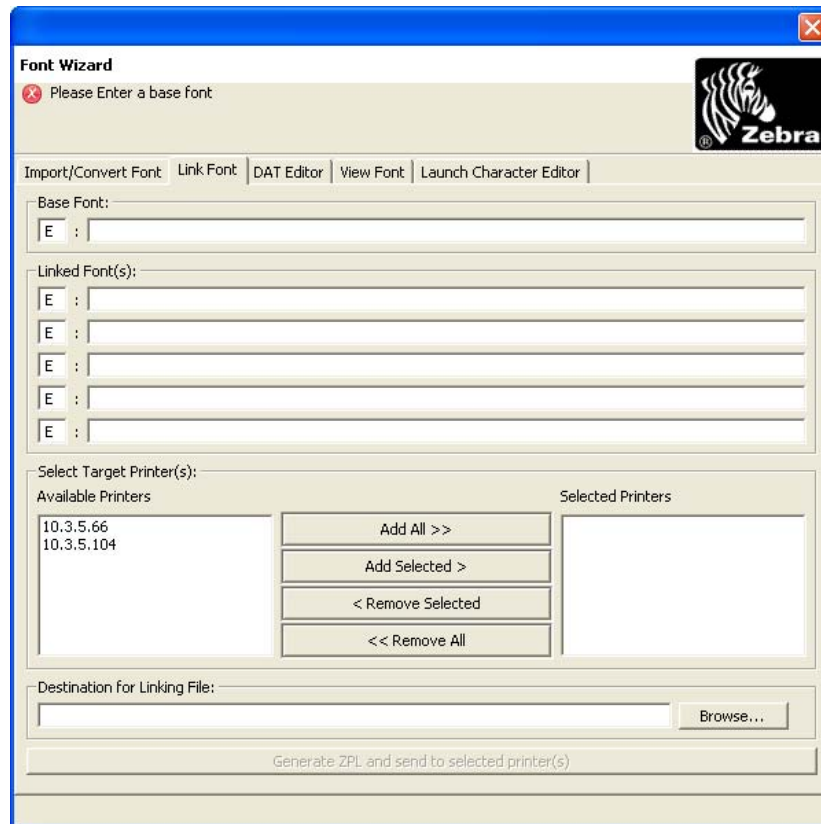

3. In the Base Font area, enter the location and the name of the font file on your printer. The default destination is E : memory, which is the available flash memory location.

4. In the Linked Font area, enter the location and name of your printer's linked file.
5. If you want to, change the default destination.
The Select Target Printer(s) part of the *Link Font* tab, selects printers you wish to receive .zpl file. This step allows font linking and conversion of the font and downloading the .zpl file simultaneously.
6. Select printers in the Available Printers area.
7. To move printers into the Selected Printers area, click Add Selected> or click Add All >>.
8. To remove printers from the Selected Printers area, select printers in the Selected Printers area. Click < Remove Selected or click << Remove All.
The Destination for Linking File area of the dialog box allows you to store the linked file on your PC. This step is not a requirement, but allows you to save the font file for future use.
9. To navigate to the desired location, in the Destination for Linking File area of the dialog box, click Browse.
The default location is the Resources\Fonts directory in the ZebraNet Bridge Resource Management window.
10. To complete the linked font task, click Generate ZPL and send to selected printer(s).


DAT Editor Tab

Only experienced users should use the DAT Editor tab. This tab allows you to create or change a .dat file to map other fonts into printer-readable standards.

To edit a .DAT file:

1. From the menu bar, select Tools > Font Wizard.
2. Select the DAT Editor tab.

The *DAT Editor* tab opens.

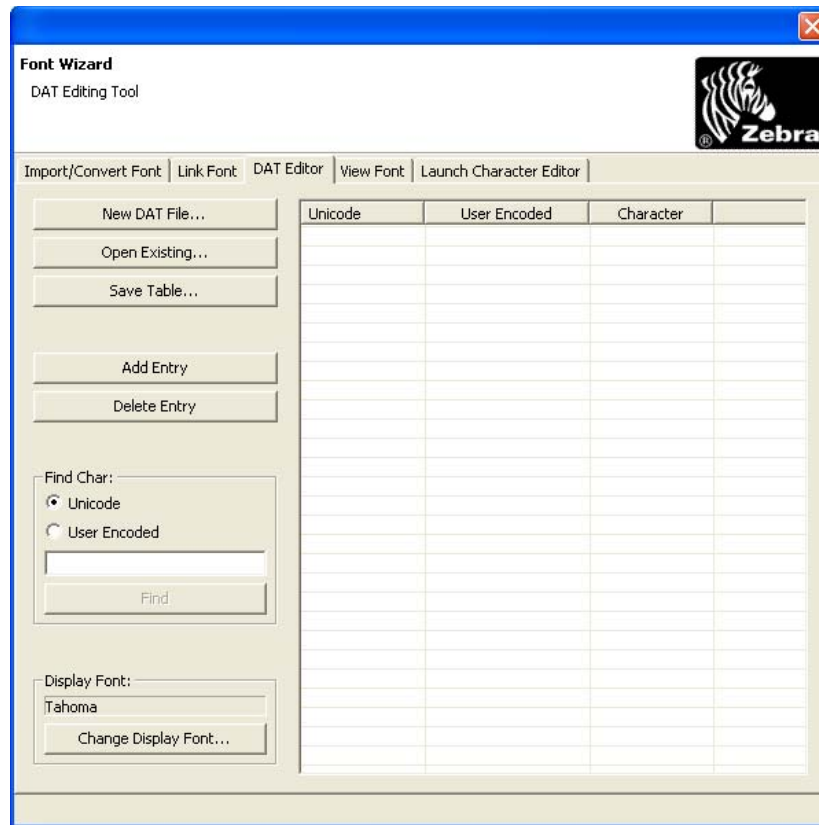


3. To open a new .dat file, click New .DAT File.
Enter your data.
4. To save your data, click Save Table.
5. To open an existing .dat file, click Open Existing.
Revise data or add new data.
6. To save your data, click Save Table.
7. To add an entry, click Add Entry.
8. To delete an entry, click Delete Entry.

9. To find a character, in the Find Char area, click Unicode or User Encoded, or type the character code.

This code appears in the text box.

10. To change the display font, click Change Display Font.

The *Change Display Font* dialog box opens.

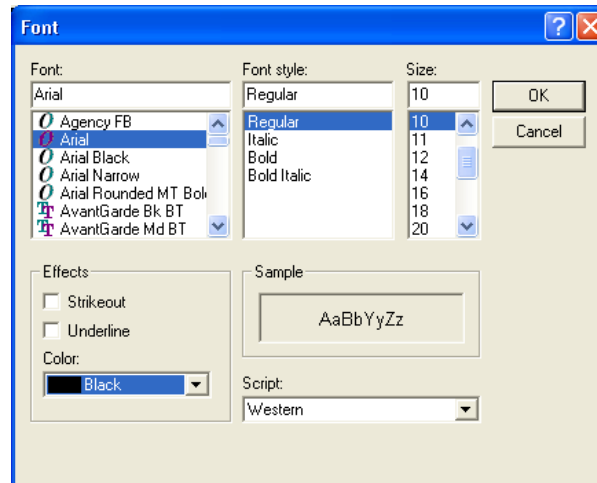


11. In the various lists, change the font, font style, and size.
All changes appear in the Sample pane.
12. To strike out or underline text, go to the Effects area.
13. Click Strikeout or Underline option.
14. To change the color, go to the Color list.
15. Select the new color.
16. In the Script list, select a language character set.
17. When you complete all changes, click OK or Cancel to abort change and return to the previous screen.

View Font

The View Font tab displays a font. These fonts must reside on your operating system and printer.

To view a font:


1. From the menu bar, select Tools > Font Wizard. Then select the View Font tab.
The *View Font tab* opens.

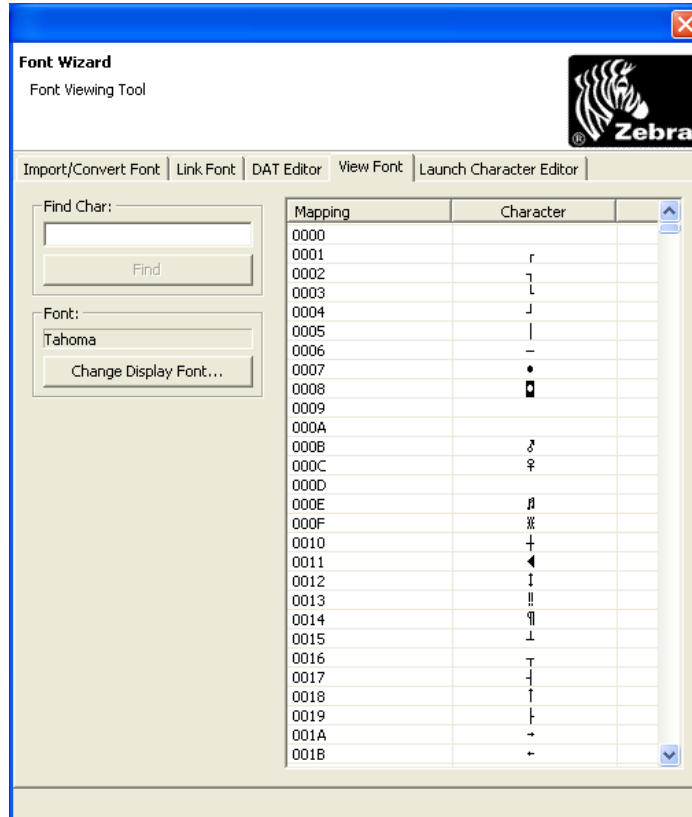

2. In the Find Char text box, type the character that you want to find.

3. To change the display font, click Change Display Font.

The *Change Display Font* dialog box opens.

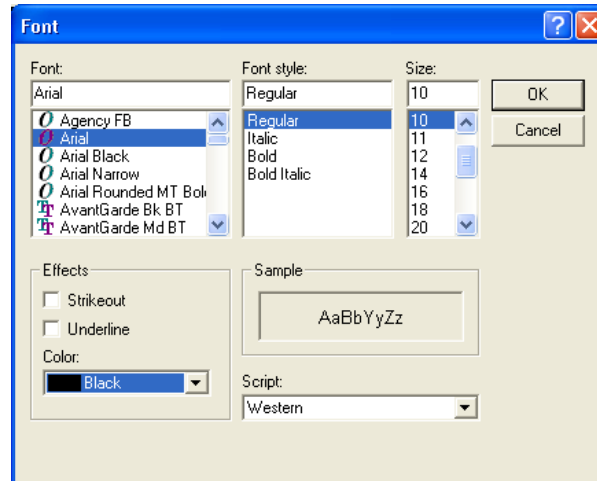

4. Change the font, font style, and size in the applicable lists.

The Sample pane displays all changes.


5. To strikeout or underline text, go to the Effects area.
6. Click the Strikeout or Underline option.
7. To change the color, go to the Color list.
8. Select a new color.
9. In the Script list, select a language character set.
10. When you complete your changes, click OK to accept changes or Cancel to abort changes and return to the previous screen.

Launch Character Editor


Only experienced users should use the Launch Character Editor tab. This tab allows you to launch the Microsoft advanced character editor.

To launch the character editor:

1. From the menu bar, select Tools > Graphics Conversion Wizard.
The *Launch Character Editor* dialog box opens.

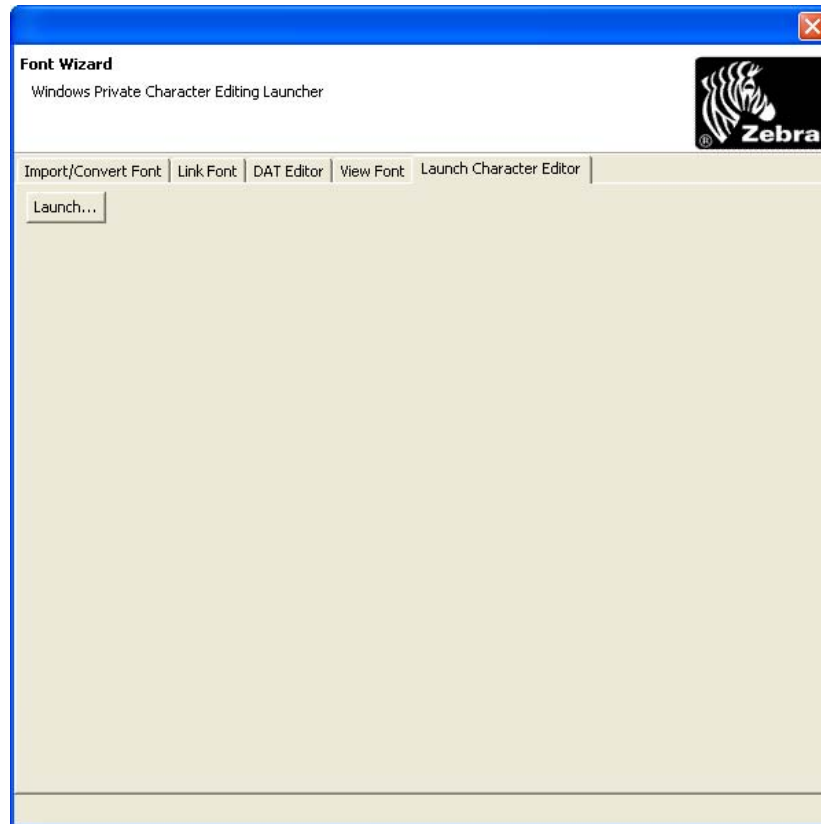

- To open the Microsoft Advanced Character Editor, click Launch.
 The *Advanced Character Editor* dialog box opens.

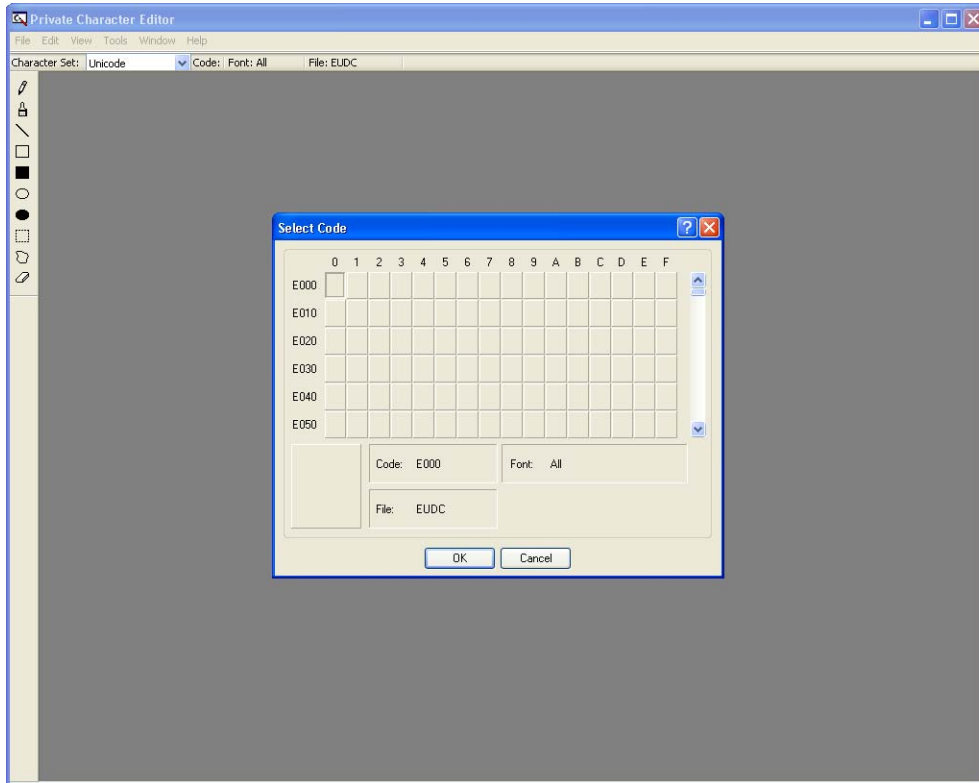

Graphics Conversion Wizard


The Graphics Conversion Wizard allows you to convert common graphics formats into a format the printer can use, store, and download. Formats that may be converted include:

- Bitmap Graphic - *.bmp
- Joint Photographics Expert Group - *.jpg
- Portable Network Graphic - *.png
- Tagged Image File Format - *.tif

To convert a graphics file:


1. From the menu bar, select Tools > Graphics Conversion Wizard.

The *Graphics Conversion Wizard* dialog box opens.

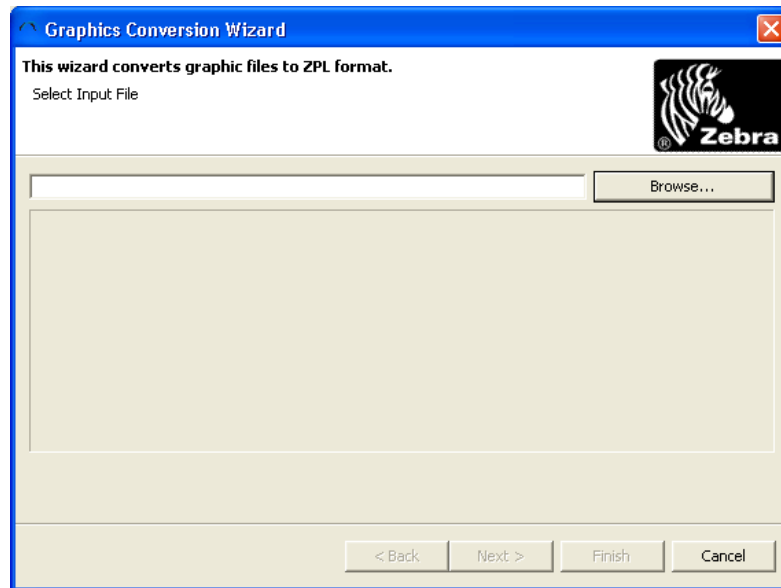

2. Click Browse.

The *Open Graphics to Convert* dialog box opens.

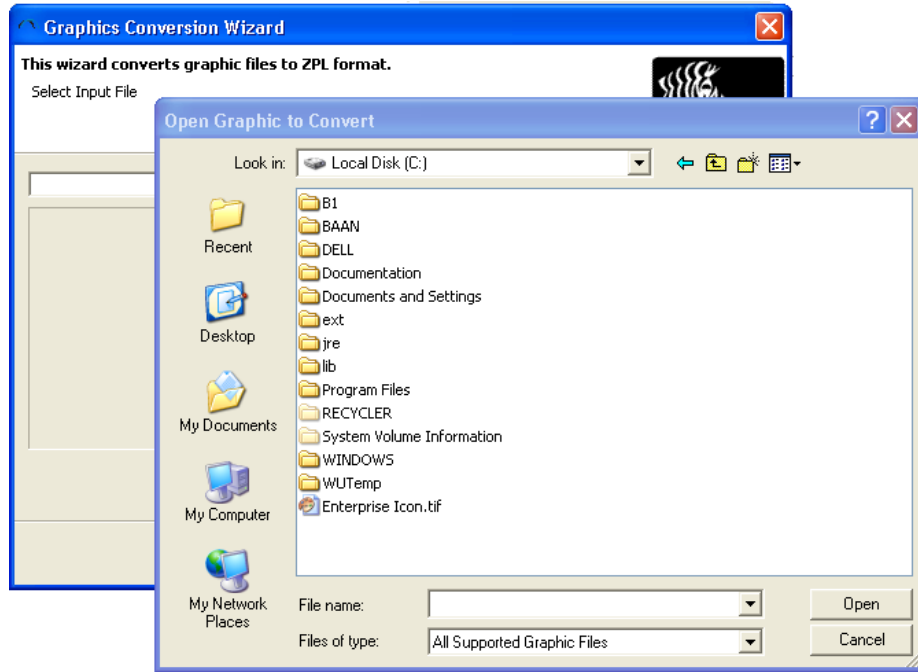


3. Browse to the graphics file that you wish to convert.

4. Click Open.




Note • ZebraNet Bridge attempts to convert any size graphic. However, you will have better results with graphics smaller than 1024 x 768 pixels.

The *Graphics Display* dialog box opens.

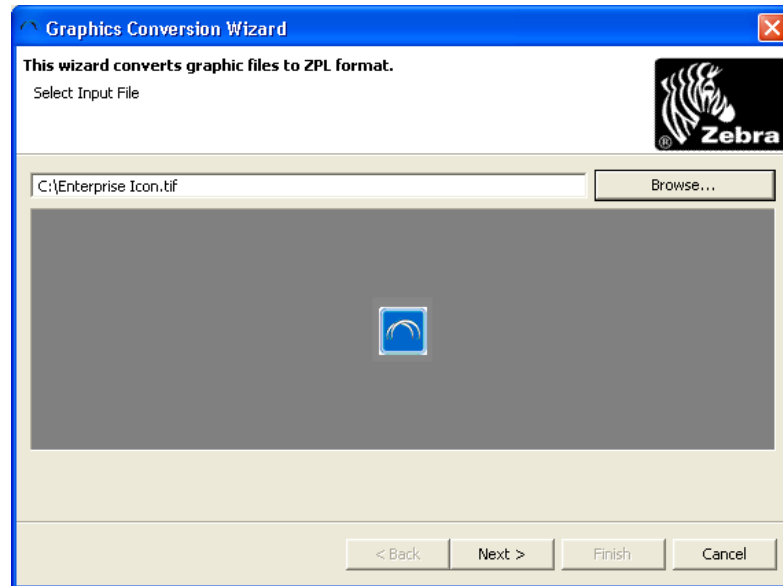


5. Click Next.

The *Graphics Rotation* dialog box opens.

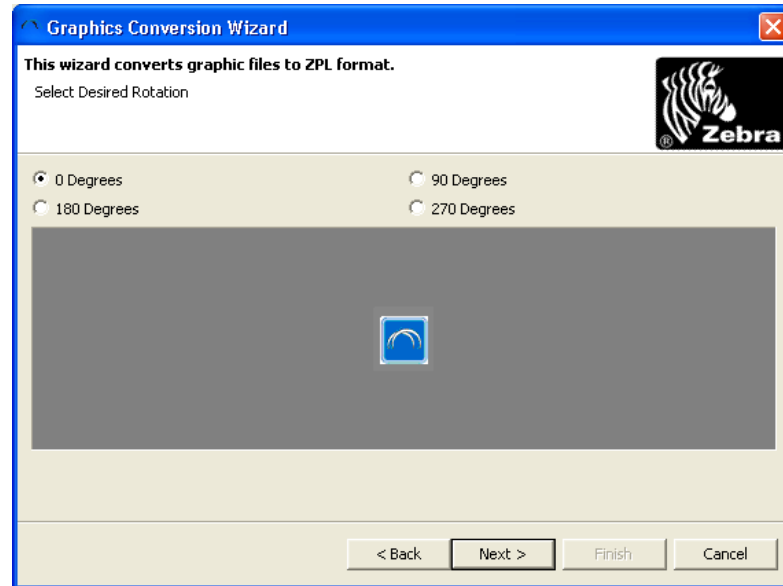**6. Select the desired rotation in degrees.****7. Click Next.**

The *Graphics Size* dialog box opens.

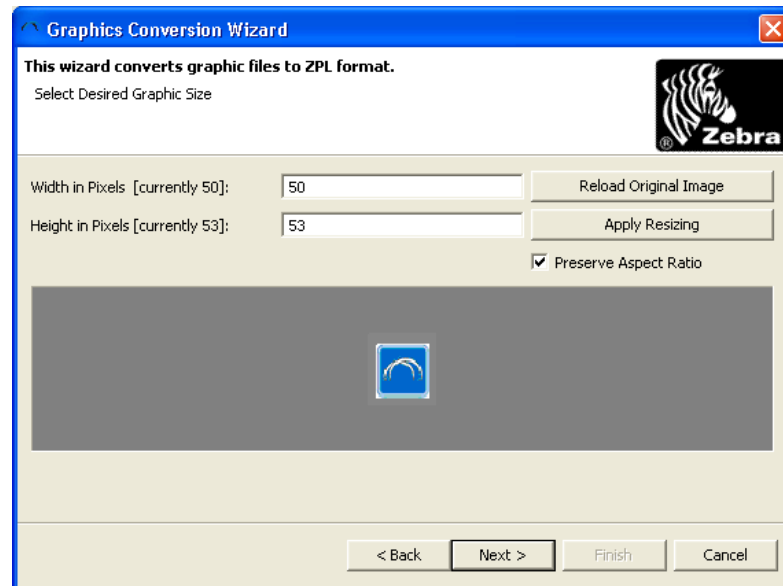
**8. Enter the desired size in pixels. See the Preserve Aspect Ratio check box.**

The default for this option is to preserve graphic aspect ratio.

9. To view changes, click Apply Resizing.**10. If you are dissatisfied with the results, click Reload Original Image.**

11. To continue, click Next.

The *Printer File* dialog box opens.

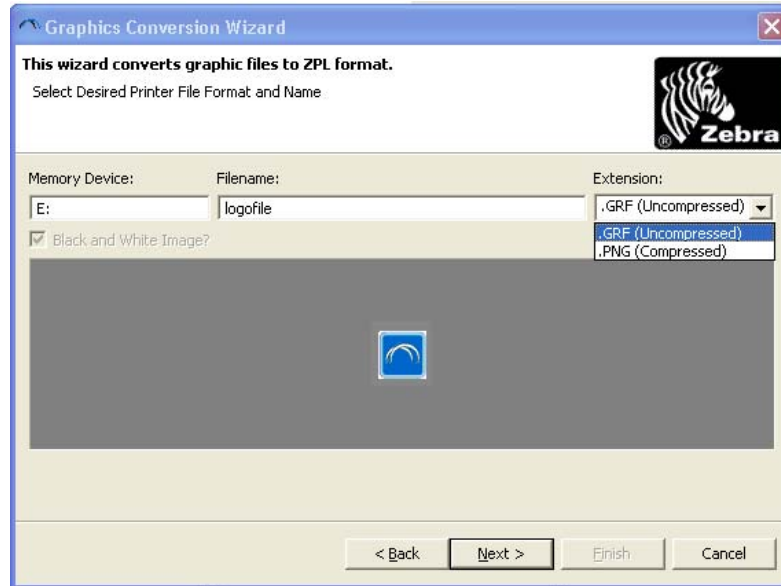

12. Enter the desired printer memory location (for example E :).

13. Enter a name for the font.


14. Select the desired compression.

The default is * .GRF (Uncompressed).

15. To continue, click Next.

16. Click Save.

The *Select Output* dialog box opens.

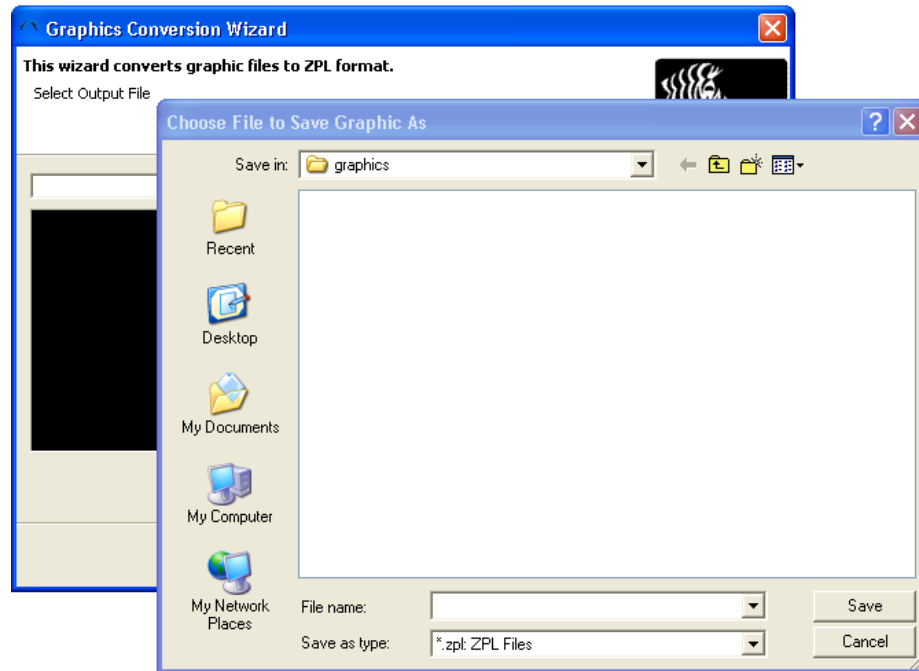


17. Browse to the desired save location. (The default is the Resources\graphics directory in the Resource Management window.)

18. Name the file, click Save.

19. Click Next.

The *Conversion Successful* dialog box opens.

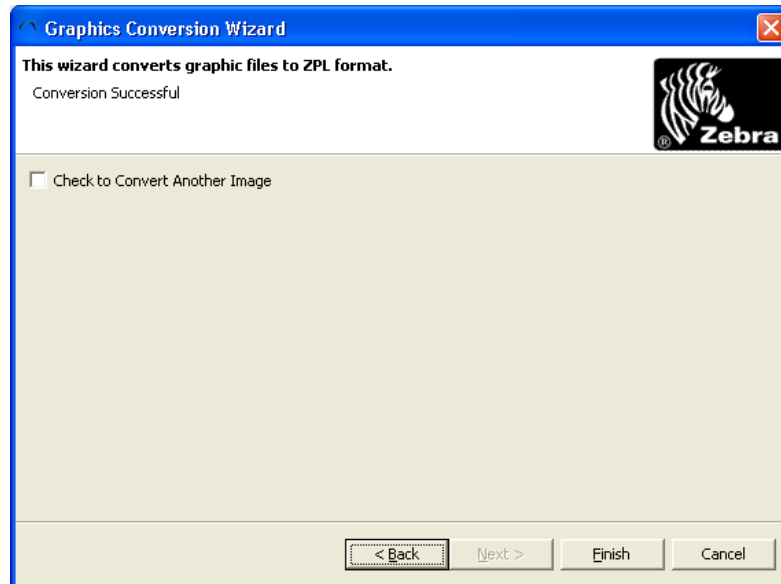**20.** To close the dialog box, click Finish. To return to the first Graphics Conversion Wizard, check Convert Another Image.

Wireless Setup Wizard

Use the Wireless Setup Wizard for initial setup of your Zebra printer with a ZebraNet Wireless Print Server. This setup requires connecting the printer to the local PC. Depending on what interface option you have, you can use either a serial, parallel, or USB connection.

You can set up the Wireless Wizard on a stationary or a mobile printer.

Before you begin

What type of printer do you want to set up?

If...	Then...
Stationary	Go to <i>For initial setup of a stationary ZebraNet Wireless Print Server: on page 110.</i>
Mobile	Go to <i>For initial setup of a mobile wireless printer: on page 117.</i>

Stationary ZebraNet Wireless Print Server Setup

For initial setup of a stationary ZebraNet Wireless Print Server:


1. From the menu bar, select Tools > Wireless Setup Wizard.

The *Wireless Setup Wizard* dialog box opens.

2. From the Choose Port list, select the port to which your printer is connected.

If you are going to save the file without sending it to the printer, select any available port. If a port is in use by another device, it is not included in the list.


The *Local Port* dialog box opens, showing the port settings.

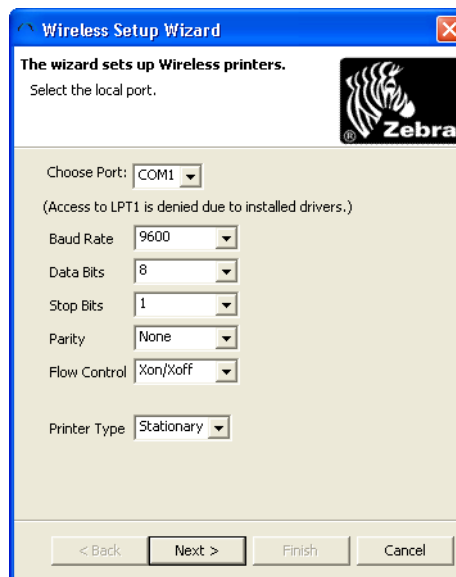

3. From the Print Type list, select Stationary.

4. To continue, click Next.

The *Network IP Selection* dialog box opens.

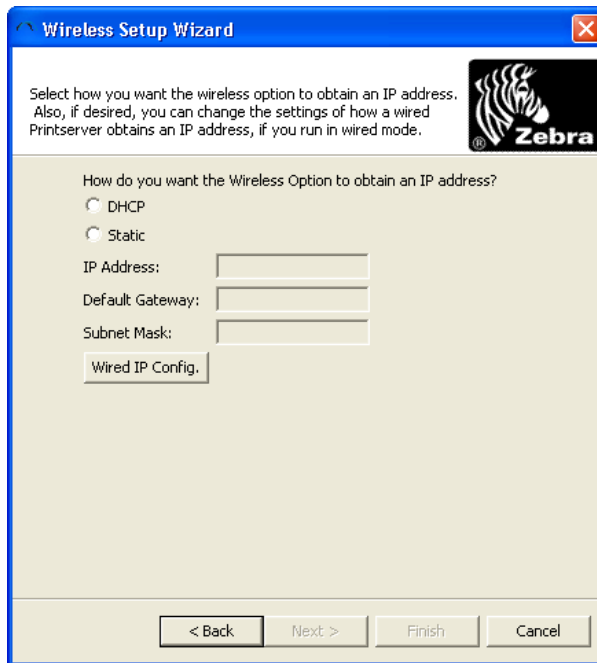


5. Enable the DHCP or Static option button.

If...	Then...
You select Static	Continue with step 6 .
Your printer has an additional ZebraNet 10/100 or PrintServer II Ethernet adapter	To configure the IP address, go to <i>For initial setup of a stationary ZebraNet Wired Print Server: on page 113</i> .

6. Enter the static IP Address, Default Gateway, and Subnet Mask.

7. When you finish, click NEXT.
The *Wireless Settings* dialog box opens.

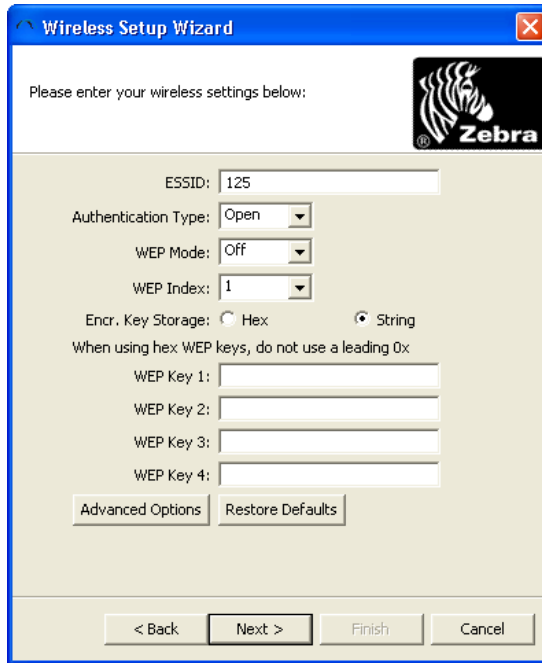


8. Enter the appropriate wireless security settings.

For initial setup of a stationary ZebraNet Wired Print Server:

1. Click Wired IP Config.

The *Network IP Selection* dialog box opens.

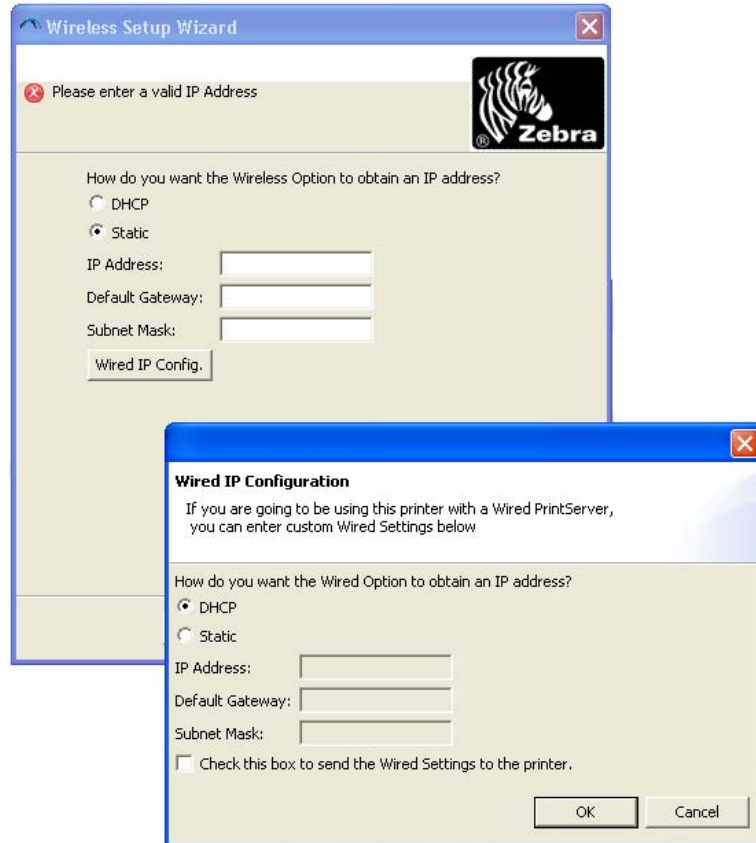


2. Enable the DHCP or Static option button.
3. Enter the static IP Address, Default Gateway, and Subnet Mask.




Note • To send the wired settings to the printer, click **Check this box to send the Wired Settings to the printer.**

4. When you finish, click OK.
The *Wireless Settings* dialog box opens.

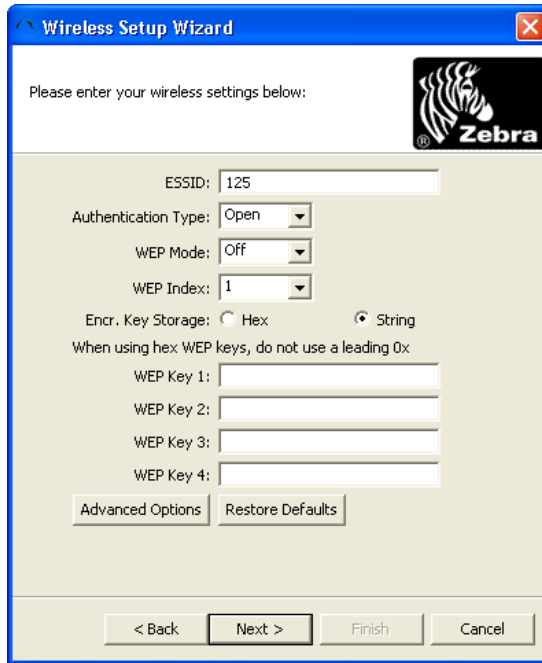

5. Enter the appropriate wireless security settings.

6. For advanced wireless settings, click Advanced Options.
 The *Advanced Wireless Settings* dialog box opens.

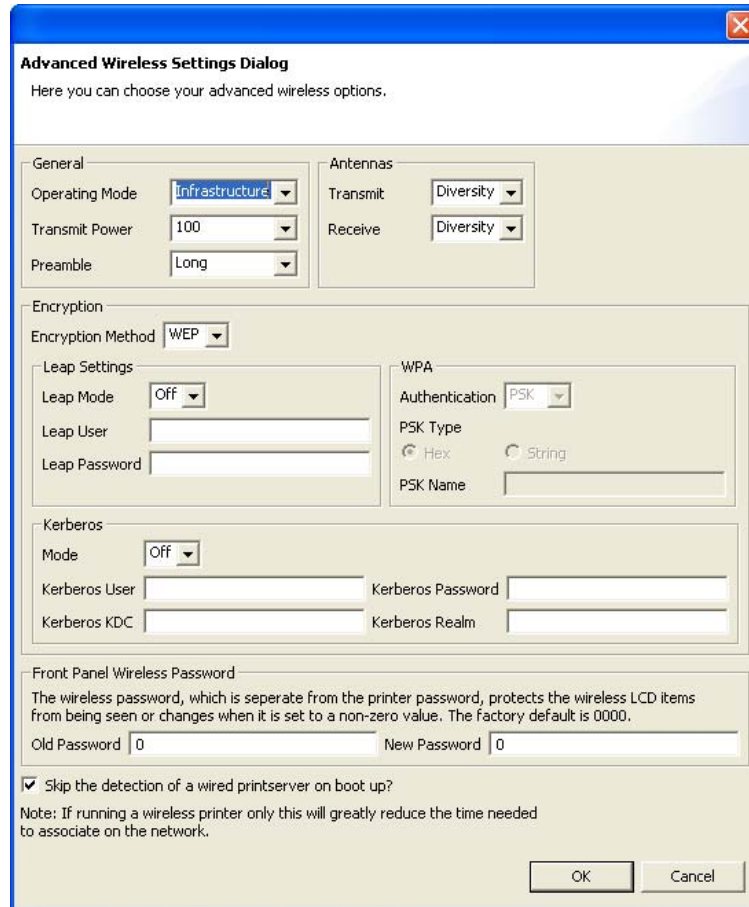

7. Enter advanced settings.




Note • If you intend to only use the wireless print server, click the **Skip the detection of a wired printserver on boot up?** check box. This speeds up the printers boot up time after power cycle.

8. When you finish, click OK.
 The advanced settings are saved to the printer.

9. Click Next.

Based on your selections in the Wireless Setup Wizard, the program writes the appropriate ZPL commands.

These commands display for your review, as follows.

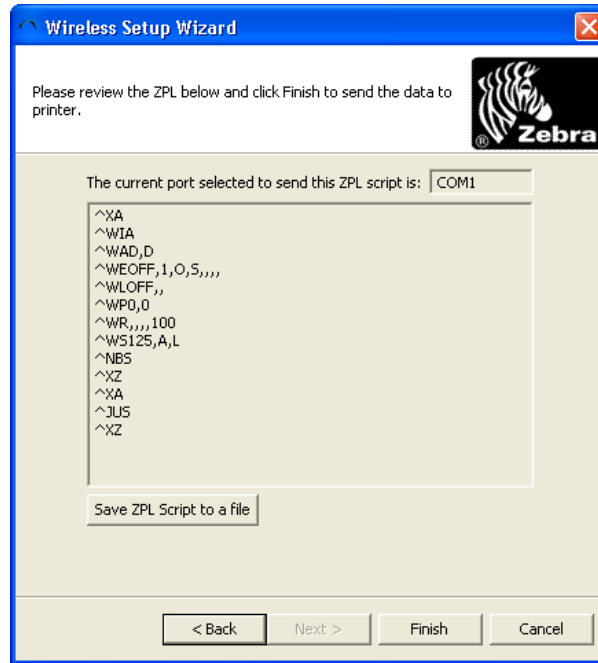

10. What do you want to do with the script?

If...	Then...
Send it now	<ol style="list-style-type: none"> 1. Click Finish. The settings are sent over a serial port to the mobile printer in a language the printer can understand.
Save for download later	<ol style="list-style-type: none"> 1. Click Save Script to a file. 2. Navigate to where you want the file to be saved. 3. Make sure the name is what you want. 4. Click Save.


Mobile Wireless Setup

You need to configure or communicate with a printer before the wireless network can locate the printer.

For initial setup of a mobile wireless printer:

1. With a serial cable, connect your mobile printer to your local computer.
2. Select Tools > Wireless Setup Wizard.


The *Wireless Setup Wizard* dialog box opens.

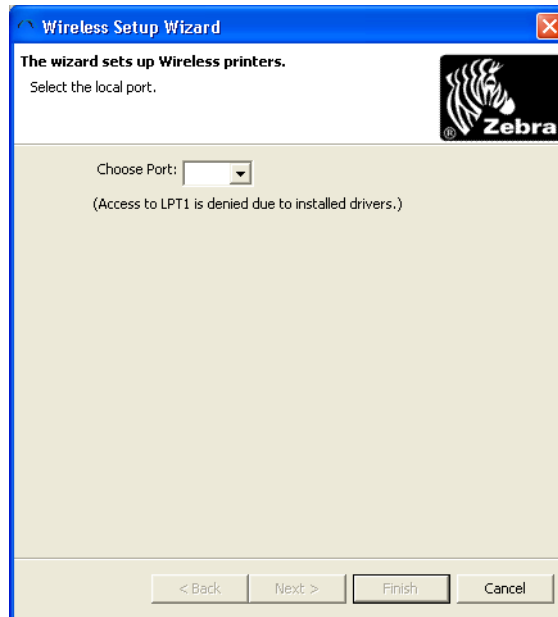

3. Select the COM port.
4. Click Next.
The local port dialog expands to include port settings.
5. In the Printer Type list, select Mobile.
The *Network IP Selection* dialog box opens.
6. Enable the DHCP or Static option button.
7. Enter the static IP Address, Default Gateway, and Subnet Mask.


8. When you finish, click OK.

The *Wireless Settings Wizard* dialog box opens.

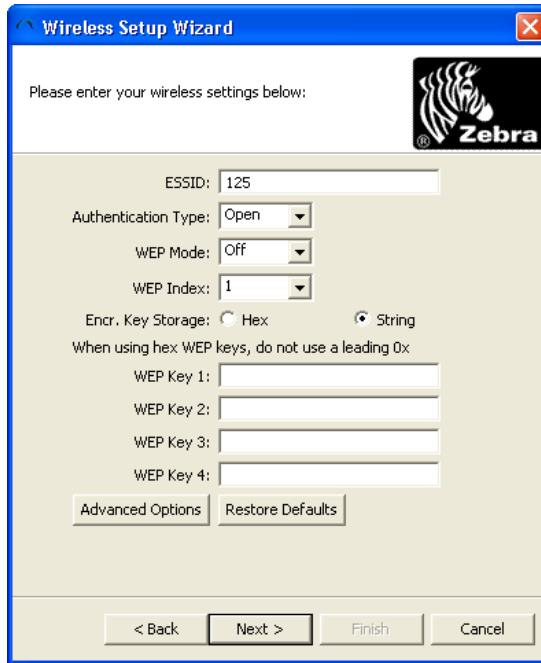

9. Enter the appropriate wireless security settings.

10. For advanced wireless settings, click Advanced Options.
The *Advanced Wireless Settings* dialog box opens.

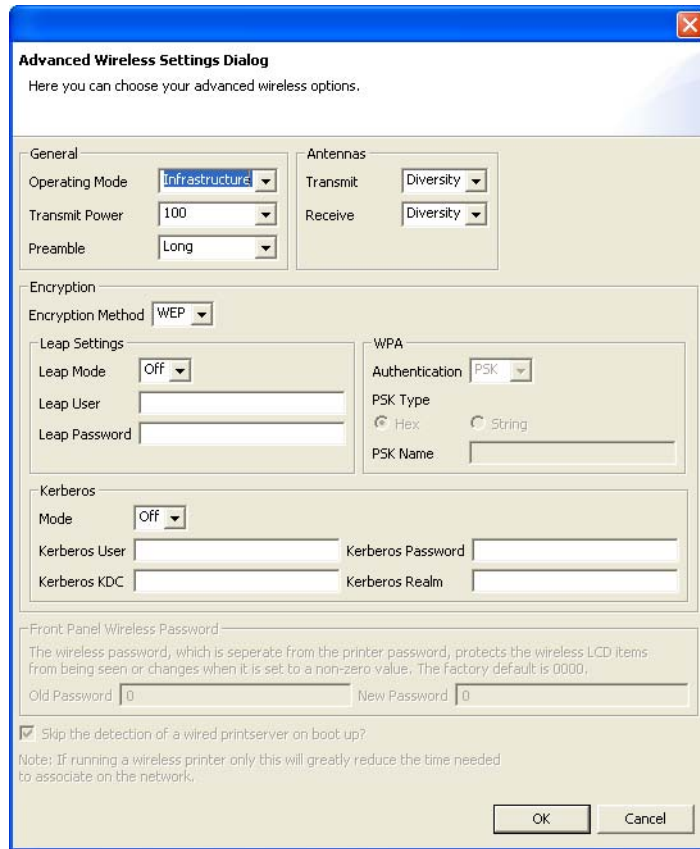


11. Enter advanced settings.
12. When finished, click OK.

13. Click Next.

Based on your selections in the Wireless Setup Wizard, the program writes the appropriate ZPL commands.

These commands display for your review, as follows.

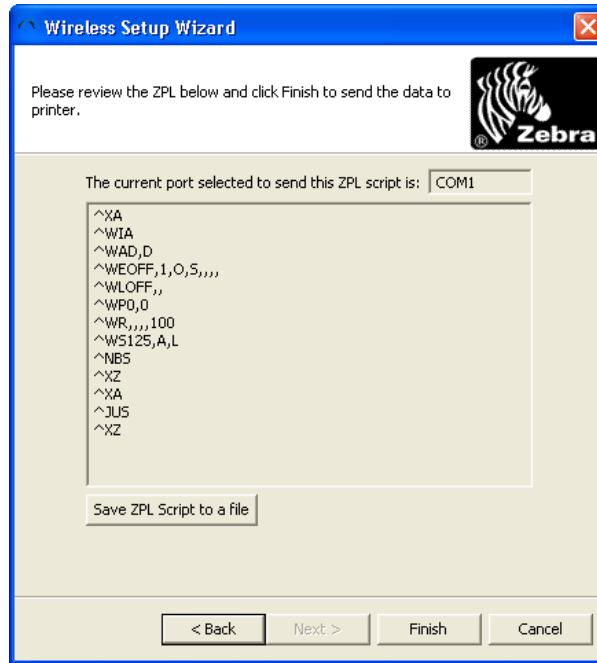**14. What do you want to do with the script?**

If...	Then...
Send it now	<ol style="list-style-type: none"> 1. Click Finish. The settings are sent over a serial port to the mobile printer in a language the printer can understand.
Save for download later	<ol style="list-style-type: none"> 1. Click Save Script to a file. 2. Navigate to where you want the file to be saved. 3. Make sure the name is what you want. 4. Click Save.

Copy Printer Wizard



This feature is available only in the ZebraNet Bridge Enterprise licensed version.

The Copy Printer Wizard allows you to copy printer settings, objects, and alerts. You can copy from one printer to printer profile to many printers. The printers do not have to be in the same management group.




Important • You may not retrieve or copy .ttf or .ttx font files from printers with firmware version V60. Download these files to the printer from the Resources Directory.

To copy printer settings from one printer to many printers:


1. From the menu bar, select Tools > Copy Printer Wizard.

The *Source Printer Selection* dialog box opens.

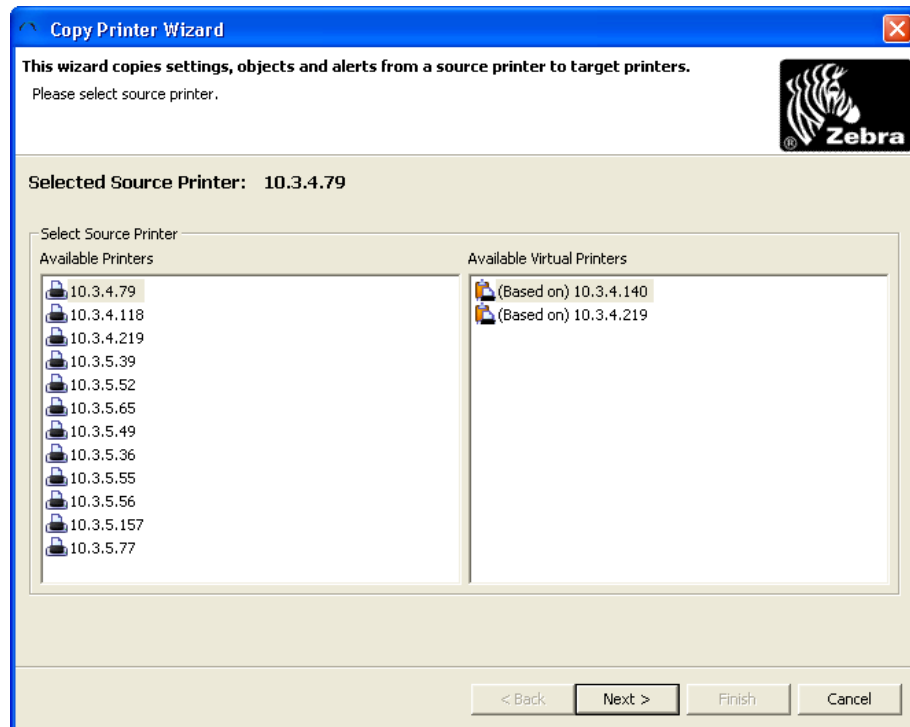

2. From the available printers, select the appropriate source printer or printer profile.
3. Click Next.

The *Target Printer Selection Wizard* dialog box opens.

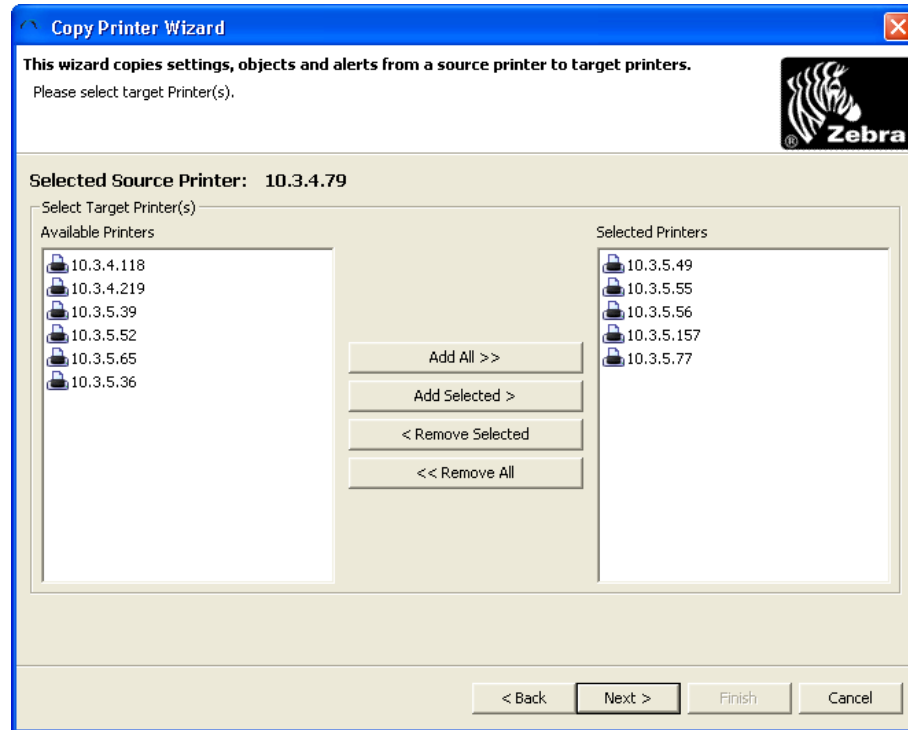


4. From the available printers on the left, select the desired target printer.
5. To select multiple printers, hold down the Shift key and click the printers.
6. To move printers into the Selected Printers area, click Add Selected > or click Add All >>.
7. To remove printers from the Selected Printers area, select printers in the Selected Printers Area.
8. Click < Remove Selected, or click << Remove All.

9. To continue, click Next.

The *Settings, Objects, and Alerts Selection* dialog box opens.

The application polls selected source and target printers for the model and firmware version. Depending on the number of target printers, this step may take several minutes.

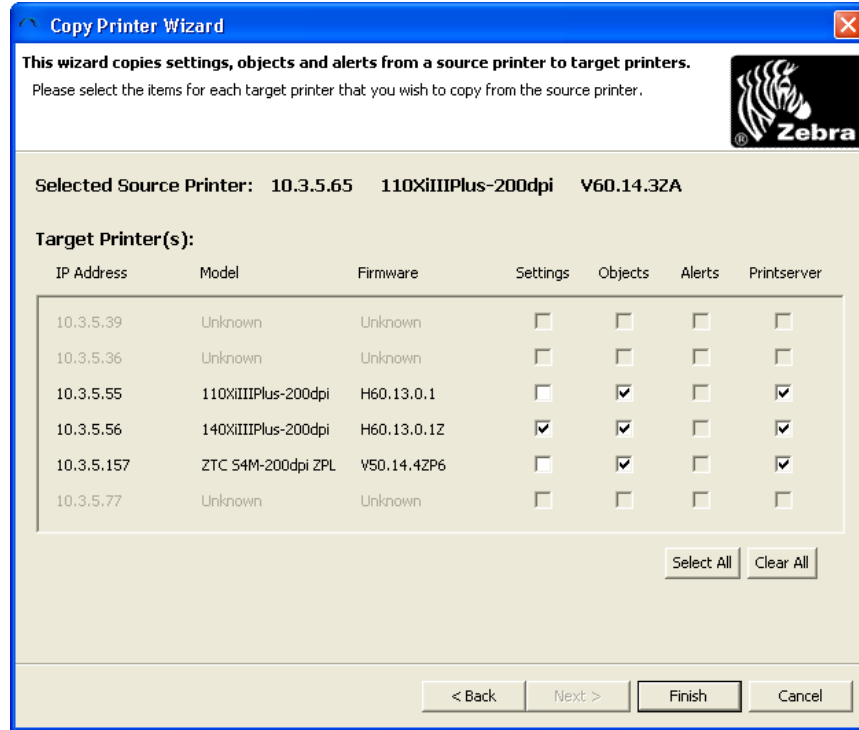

This dialog box displays the preferred download settings for your selected source and target printers. ZebraNet Bridge only allows downloads as follows:

Source and Target Printer Configuration	Settings	Objects	Alerts	Print Server
Same printer type, same firmware	✘	✘	✘	✘
Same printer type, different firmware	✘	✘	No	✘
Different printer type, different firmware	No	✘	No	✘

10. To download selections, click Finish.



Notes •



Menu and Toolbars

This chapter describes ZebraNet Bridge menus and toolbar.

Contents

Toolbar	126
Menu Bar	129
Visual Alerts Icon	128

Toolbar

The toolbar provides quick access to most common functions in ZebraNet Bridge Enterprise. These functions also appear on the menu bar.

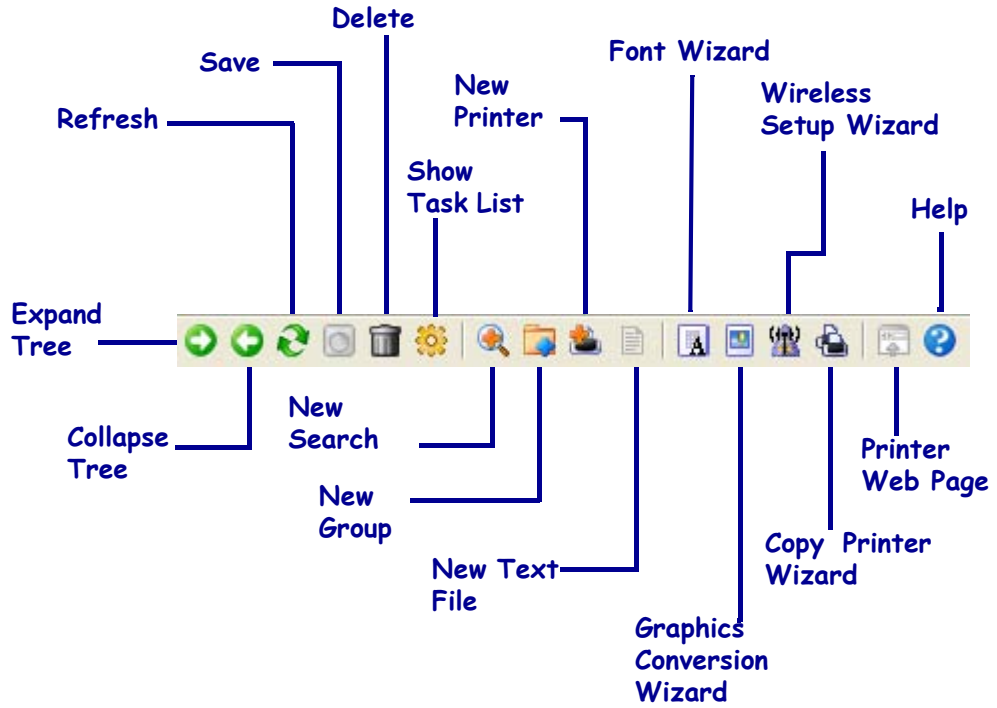



















Table 2, ZebraNet Bridge Enterprise Toolbar buttons on page 127 explains the toolbar buttons.

Table 2 • ZebraNet Bridge Enterprise Toolbar buttons

Toolbar Button	Description
	Expand Tree
	Collapse Tree
	Refresh
	Save
	Delete
	Show Task List
	New Search
	New Group
	New Printer
	New Text File
	Font Wizard
	Graphics Conversion Wizard
	Wireless Setup Wizard
	Copy Printer Wizard
	Printer Web Page
	Help

Visual Alerts Icon






This table shows the Visual Alerts tab with the icon present:



Icon	Description
	The visual alerts icon appears in the Visual Alerts tab when events have been detected by the application.

Menu Bar

This section provides you with menu examples. Each illustrations shows the menu options.

Sometimes you cannot access a menu option. The reason is that the option is unavailable in the window where you are.

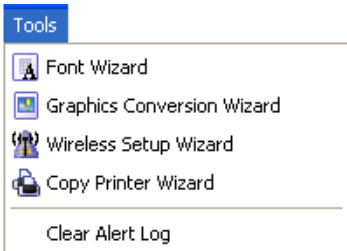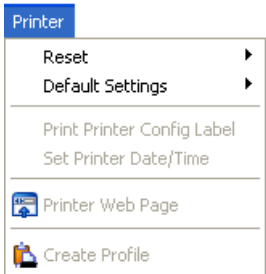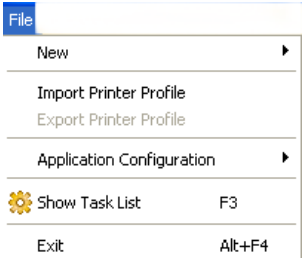

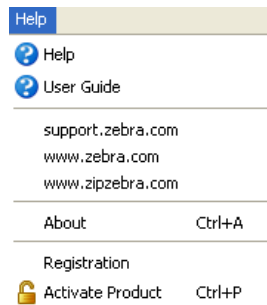

B



Frequently Asked Questions

This appendix provides you with frequently asked questions about ZebraNet Bridge.

FAQ

Question	Answer
I copied my printer settings to another printer. Now only a portion of the label prints out. Why?	Check your printer types. You may have copied 200 dpi printer settings to a 300 or 600 dpi printer.
Why do some application dialog boxes appear strange (fonts are too big, etc.)?	Sometimes, the application uses system fonts in dialog boxes. If a font is too big, change your system display settings. Use small fonts or a standard Windows display theme.
Why can't I see system settings for my 2844-Z or 3844-Z printers?	In some printer firmware versions, the XML data from the printer does not follow proper form. ZebraNet Bridge cannot understand or display this data. You can't see the printer's system settings, but you can still manage the print server settings and download firmware, files, and fonts to all your 2844-Z and 3844-Z printers.
When I download firmware to my PAX3 print engine, the firmware download seems to complete. Yet, when I refresh the print engine, the firmware version shows the original firmware. Why?	Before downloading firmware, put the PAX3 print engine in firmware download mode. Simultaneously hold in the control panel's right and left arrows, and then turn on the print engine. The print engine enters firmware download mode. Use ZebraNet Bridge to download firmware.
I can't see my tabletop printer's print server in the printer tree. I can't see my mobile printer in the groups tree.	To see these devices in ZebraNet Bridge, enable SNMP across the network path. Contact your network administrator.
I can't find LPT1 in the Add Printer Wizard.	You may have a driver installed on your PC's LPT1 port. ZebraNet Bridge Enterprise cannot connect to the port and talk to the printer. The application will not display the unavailable port.
When using ZebraNet Bridge, my printer acts strangely.	ZebraNet Bridge uses Zebra control characters (the carat, tilde, and comma). If you change these default control characters in your printer, ZebraNet Bridge will cause your printer to act strangely. To correct this problem, reset your printer's control characters to the default settings. Or contact Zebra Technical Support for more information.
I enter the Group Management window. I drag my group to another group with the same name. Instead of moving my group, the program copies my group.	ZebraNet Bridge follows Windows behavior: The dragged group moves into the target group. Suppose that the target group has the same name as the dragged group. Then the drop performs a copy instead of a move.

Question	Answer
In the Group Management window, my printer host name (or printer name) displays improperly.	Never set a printer name to "‡", or any other non-printable character. Otherwise, the group window tree improperly displays the printer name. If you use the Resolve By Name setting, the Lookup By Name fails and the system looks up the printers by IP.
With USB, I cannot connect to my desktop printer.	This version of ZebraNet Bridge does not support USB for desktop printers. Future releases of ZebraNet Bridge releases will offer this support.
I have a ZBI application on my printer. In ZebraNet Bridge, I can view the print server status, but not the printer status.	Please contact Zebra's Technical Support.
I search for my networked printer using ZebraNet Bridge. In the search group window, an arbitrary IP address or 0.0.0.0 appears. Why?	<ul style="list-style-type: none"> • You might have set the print server to gleaning. See Gleaning on page 41. • The printer might have a wired print server and an enabled wireless print server. See Wireless Setup Wizard on page 110.
I cannot discover print servers with 0.0.0.0 IP address.	<ul style="list-style-type: none"> • Print servers with 0.0.0.0 IP address can only be discovered through a local broadcast search. • ZebraNet Bridge must be running on a computer that is on the same local subnet as the print server.



Notes • _____

C



Drag and Drop Defaults

The table in this appendix describes the default Drag and Drop actions enlisted by ZebraNet Bridge.

Default Drag and Drop Function

Table 3 describes ZebraNet Bridge default actions.

Table 3 • Drag and Drop Functions

Source	Target			
	Resource Directory	Printer	n Printers	Group
Files from Clipboard	Paste files	Paste files	N/A	Paste files to each printer
Files from Resource Directory	Paste files	Paste files	N/A	Paste files to each printer
Printer	Create printer profile	Clone all with confirming dialog box	N/A	Add printer to group
Group	N/A	N/A	N/A	Copy group to group
n Printers	N/A	N/A	N/A	Copy printers to group

Index



A

alerts
clear log, 76
copy, 65
monitor, 74
set, 74

C

character editor, launching, 102
clearing alerts log, 76
communications
window, 88
compare printers, 87
components, 2
configuration label
how to print, 72
configurations
multiple, 59
open, 60
save, 59
contacts, vii
copy
alerts, 65
all settings, 66
objects, 65
print server settings, 64
printer settings, 64
copy configurations, 64
copy printer wizard, 121
customer service, vii

D

DAT Editor, 98

download
objects, 69

E

edit
text objects, 70

F

factory defaults
print server, 71
printer, 71
FAQ, 131
feature matrix, 10
firmware requirements, 92
folder location, resource management window, 53
font
change .DAT, 98
how to add, 54
how to convert, 92
how to download files, 92
how to link multiple files, 96
how to view, 100
wizard, 92

G

gleaning, 41
graphics conversion wizard, 104
group management window, 42
about, 23
groups
how to copy, 43
how to create, 42
GUI components, 2

H

hard actions, 71

I

icons, status, 77

installation, 17

L

liability, ii

M

media

ordering, vii

menu bar, 125, 129

mobile printers

about, 24, 25

differences, 24, 25

how to add, 44

monitor

alerts, 74

status, 77

monitor visual alerts, 83

multiple user interface configurations, 24

N

navigation, 6

O

objects, 53

copy, 65

download, 69

files, 53

firmware, 53

fonts, 53

graphics, 53

scripts, 53

ordering ribbon and media, vii

P

print a configuration label, 72

printer discovery, 23

printer profiles

how to create, 55

how to download, 55

how to export, 56

how to import, 56

printers

compare, 87

how to add, 44

how to copy, 43

how to delete, 52

preferences, 49

product

activate, 8

register, 9

profile management window, 55

about, 23

R

related documents, x

requirements

operating system, 16

print server, 13

printer, 13

workstation, 16

reset

print server to factory defaults, 71

print server to save settings, 72

printer to factory defaults, 71

printer to save settings, 71

resource management window

about, 23

download, 68

ribbon

ordering, vii

S

sales, vii

scripts

about, 54

search group

directed broadcast, 38

IP address, 40

local broadcast, 36

multicast, 39

subnet, 37

search group window, 23

setting alerts, 74

settings

change, 62

change print server, 63

change printer, 62

copy print servers, 64

copy printer, 64

status

icons, 77

monitor, 77

- system preferences
 - alert display, 33
 - discovery options, 30
 - event notification, 27
 - printer display options, 29
 - printer resolving, 30
 - setting, 26
 - system heartbeat, 28
 - view filter, 32

T

- task list, 24
- technical support, vii
- toolbar, 125, 126

V

- view text objects, 70
- visual alerts, 81
 - monitor, 83

W

- wireless setup wizard, 110
- wizard
 - copy printer, 121
 - font, 92
 - graphics conversion, 104
 - wireless setup, 110
 - mobile, 117
 - stationary, 110



Notes •

ZebraNet™ Bridge End User License Agreement



Please read the terms of this “End User License Agreement” (the “Agreement”) carefully. The Agreement is a legal agreement between you (either an individual or a single entity) and Zebra Technologies International, LLC (“Zebra”) for the Zebra computer software accompanying this End User License Agreement, and any associated media, printed materials and any “online” or electronic documentation (collectively, “Software”). By installing or using the Software, you agree to be bound by the terms of this Agreement. If you do not agree to the terms of this Agreement, you may not install or use the Software.

1. Grant of License. The Software is protected by copyright and other intellectual property laws and international treaties. The Software is licensed to you, and not sold, subject to the terms of this Agreement. Subject to the terms of this Agreement, Zebra hereby grants you a limited, personal, non-exclusive license during the term of this Agreement to use the Software solely and exclusively for your internal use for the operation of your associated Zebra printer(s) and for no other purpose. If your licensing arrangement specifies a maximum number of printers, your license to the Software is limited to operation of no more than the specified number of printers. To the extent that any portion of the Software is provided to you in a manner that is designed to be installed by you, you may install one copy of the installable Software on one hard disk or other storage device for one computer, workstation, terminal, or other digital electronic device, as applicable (an “Electronic Device”), and you may access and use that Software as installed on that Electronic Device so long as only one copy of such Software is in operation. If you are an organization rather than an individual, you may authorize personnel associated with your business to use the Software, but only one person at a time on one Electronic Device at a time. You agree not to duplicate or copy the Software, except that you may make one back-up copy for archive purposes. The primary user of the Electronic Device on which installable Software is installed may also make a copy for his or her exclusive use on a portable computer, so long as such Software is being used only on one Electronic Device at a time. You acknowledge that the Software may not function (or provide limited functionality) without a certain, unique software key code or hardware key or other security device. This security device will be furnished to you by Zebra and you agree that any such security device is to be used solely with the Software for which it is provided. Further, you agree not to reproduce, deactivate or bypass any such security device. While Zebra may (in its sole discretion) provide you with the applicable key prior to receipt from you of the applicable license fees, you will remain obligated to pay such fees to Zebra.

2. Storage/Network Use. In the alternative, you may install a copy of the Software on a storage device, such as a network server, used only to access and use the Software on your Electronic Devices over an internal network; however, you must acquire and dedicate a license for each separate Electronic Device on which the Software is accessed and used from the storage device. A license for the Software may not be shared or used concurrently on different Electronic Devices.

3. Documentation. If the Software contains documentation which is provided only in electronic form, you may print one copy of such electronic documentation. You may not copy the printed materials accompanying the Software.

4. Limitations of Reverse Engineering, Decompilation and Disassembly. You may not reverse engineer, decompile, or disassemble the Software, except and only to the extent that such activity is permitted by applicable law notwithstanding this limitation.

5. Transfer/Sublicense. You may not transfer, sublicense, distribute, rent, lease, supply, market or lend the Software to any other party.

6. Confidentiality. You acknowledge that the Software embodies confidential information owned by Zebra and/or its suppliers and licensors. To the extent you have access to any such information, you agree to use such information only for the authorized use of the Software. You further agree not to disclose such confidential information to any other party and to use at least the same degree of care to maintain the confidential nature of such information as you use to maintain the confidentiality of your own confidential information.

7. Intellectual Property. All title, copyrights and other intellectual property rights in and to the Software (including but not limited to copyrights, patents, trade secrets and trademarks) are owned by Zebra or its suppliers and licensors. You must maintain all copyright notices on all copies of the Software. All rights not expressly granted are reserved by Zebra. Without prejudice to any rights or remedies Zebra may have for your violation of this Software License, Zebra shall own all changes or modifications to the Software.

8. Termination. Without prejudice to any other rights or remedies Zebra may have, Zebra may terminate this Agreement if you fail to comply with the terms and conditions of this Agreement. Zebra may terminate this Agreement by offering you a superseding Agreement for the Software or any replacement or modified version of or upgrade to the Software and conditioning your continued use of the Software or such replacement, modified or upgraded version on your acceptance of such superseding Agreement. In addition, either party may terminate this Agreement at any time. Subject to the foregoing, termination shall be effective upon notice to the other party. In the event that this Agreement terminates for any reason, your license to use the Software will terminate, and you must immediately stop using the Software, destroy all copies of the Software and all of its component parts, and, upon request, provide an affidavit certifying your compliance with the foregoing. The provisions of Sections 4, 5, 6, 7, 12, 13, 14, 15, 16, 17, 18, 19 and 20 shall survive termination of this Agreement.

9. U.S. Government Restricted Rights. The Software and Documentation are “Commercial Items,” as that term is defined at 48 C.F.R. § 2.101, consisting of “Commercial Computer Software” and “Commercial Computer Software Documentation,” as such terms are used in 48 C.F.R. § 12.212 or 48 C.F.R. § 227.7202, as applicable. All Software provided to the U.S. Government pursuant to solicitations issued on or after December 1, 1995 is provided with the commercial rights and restrictions described elsewhere herein. All Software provided to the U.S. Government pursuant to solicitations issued prior to December 1, 1995 is provided with RESTRICTED RIGHTS as provided for in FAR, 48 CFR 52.227-19 (JUNE 1987) or DFARS, 48 CFR 252.227-7013 (OCT 1988), as applicable.

10. Export Restrictions. You agree that you will not export or re-export the Software, any part thereof, or any process or service that is the direct product of the Software (the foregoing collectively referred to as the “Restricted Components”), to any country, person or entity subject to U.S. export restrictions. You specifically agree not to export or re-export any of the Restricted Components: (i) to any country to which the U.S. has embargoed or restricted the export of goods or services, which currently include but are not necessarily limited to Cuba, Iran, Iraq, North Korea, Sudan and Syria, or to any national of any such country, wherever located, who intends to transmit or transport the Restricted Components back to such country; (ii) to any person or entity who you know or have reason to know will utilize the Restricted Components in the design, development or production of nuclear, chemical or biological weapons; or (iii) to any person or entity who has been prohibited from participating in U.S. export transactions by any federal agency of the U.S. government. You warrant and represent that neither the U.S. Commerce Department, Bureau of Export Administration nor any other U.S. federal agency has suspended, revoked or denied your export privileges.

Contractor/Manufacturer is Zebra Technologies Corporation, 333 Corporate Woods Parkway, Vernon Hills, Illinois 60061.

11. Accessing Services Using the Software. Your use of any service accessible using the Software is not covered by this EULA and may be governed by separate terms of use, conditions or notices. Zebra and its suppliers and licensors hereby disclaim any such liability for any such services accessed.

12. Disclaimer. ZEBRA SUPPLIES THE SOFTWARE AS IS AND WITH ALL FAULTS AND DOES NOT MAKE ANY WARRANTIES WHATSOEVER, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTIES CONCERNING THE SOFTWARE OR ANY APPLICATION, OPERATION OR USE THEREOF, THE OUTPUT OR THE DATA GENERATED BY THE OPERATION OR USE THEREOF, OR ANY SUPPORT SERVICES RENDERED WITH RESPECT THERETO. ZEBRA HEREBY EXCLUDES ALL IMPLIED WARRANTIES TO THE MAXIMUM EXTENT AUTHORIZED BY LAW, INCLUDING, SPECIFICALLY, ANY IMPLIED WARRANTY ARISING BY STATUTE OR OTHERWISE IN LAW OR FROM A COURSE OF DEALING OR USAGE OF TRADE, ALL IMPLIED WARRANTIES OF MERCHANTABILITY, OR OF MERCHANTABILITY QUALITY, OR OF FITNESS FOR ANY PURPOSE, PARTICULAR, SPECIFIC OR OTHERWISE, OR OF TITLE, OR OF NONINFRINGEMENT. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF IMPLIED WARRANTIES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. WHEN THE

IMPLIED WARRANTIES ARE NOT ALLOWED TO BE EXCLUDED IN THEIR ENTIRETY, THEY WILL BE LIMITED TO THE DURATION OF NINETY (90) DAYS. WITHOUT LIMITING THE GENERALITY OF THE FOREGOING, ZEBRA DOES NOT WARRANT THAT THE OPERATION OF THE SOFTWARE WILL BE UNINTERRUPTED OR ERROR FREE. To the extent that the Software covered by this EULA includes emulation libraries, such emulation libraries do not work 100% correctly or cover 100% of the functionality of the printer language being emulated, are offered “as is” AND WITH ALL FAULTS, AND ALL THE DISCLAIMERS AND LIMITATIONS CONTAINED IN THIS PARAGRAPH AND THIS AGREEMENT APPLY TO SUCH EMULATION LIBRARIES.

13. Limitation of Liability and Damages. ZEBRA DOES NOT ASSUME RESPONSIBILITY FOR ANY SPECIFIC APPLICATION OF THE SOFTWARE OR FOR COMPATIBILITY WITH OTHER SOFTWARE OR EQUIPMENT. TO THE FULL EXTENT ALLOWED BY LAW, ZEBRA EXCLUDES FOR ITSELF AND ITS LICENSORS AND SUPPLIERS ANY LIABILITY FOR ANY DAMAGES, INCLUDING WITHOUT LIMITATION DIRECT, CONSEQUENTIAL, INCIDENTAL, INDIRECT, SPECIAL, EXEMPLARY OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, DAMAGE TO GOODWILL, LOSS OF INFORMATION OR DATA, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF ANY PRODUCTS, PARTS OR SOFTWARE, WHETHER BASED ON CONTRACT, TORT, NEGLIGENCE, STRICT LIABILITY OR OTHERWISE, EVEN IF ZEBRA OR ANY LICENSOR OR SUPPLIER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. TO THE MAXIMUM EXTENT AUTHORIZED BY LAW, THIS DISCLAIMER OF LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL OF ITS ESSENTIAL PURPOSE. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF DIRECT, INCIDENTAL, CONSEQUENTIAL OR OTHER DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. WHEN LIABILITY FOR DAMAGES IS NOT ALLOWED TO BE LIMITED OR EXCLUDED IN ITS ENTIRETY, ZEBRA LIMITS ITS LIABILITY TO REPAIR, REPLACEMENT, OR, AT ZEBRA'S OPTION, REFUND OF THE PRICE OF THE SOFTWARE.

14. Zebra Suppliers and Licensors. Any release, disclaimer or limitation of Zebra's liability or damages pursuant to this Agreement shall be construed, in addition to Zebra's benefit, also to the benefit of Zebra's suppliers, licensors, employees, and contractors and, without limiting any other defenses that such suppliers, licensors, employees and contractors may have, you agree to release such parties from liability or damages in accordance with such release, disclaimer, or limitation of liability or damages to the same extent that such provisions apply to Zebra. The Software includes runtime components of Standard Widget Toolkit software (the “SWT Software”) licensed from third parties under the Common Public License v1.0. Any provisions of this Agreement which differ from the provisions of the Common Public License v1.0 are offered only by Zebra and not by the suppliers or licensors of the SWT Software. Source code for the SWT Software is available upon written request.

15. Governing Law. To the maximum extent permitted by law, the laws of the State of Illinois, U.S.A., without reference to its conflict of laws provisions, will apply to this Agreement. You irrevocably agree to submit to the exclusive jurisdiction and venue of the state or federal courts in the State of Illinois in the event of any litigation involving this Agreement or the Software. You agree that you shall not assert any claim that you are not subject to the jurisdiction of such courts, that the venue is improper, that the forum is inconvenient or any similar objection, claim or argument. Zebra may, in its sole discretion, choose to resolve any controversy or dispute between you and Zebra concerning this Agreement, or the existence, validity, breach or termination thereof, whether during or after the term by binding arbitration in accordance with the Commercial Arbitration Rules of the American Arbitration Association (“AAA”), as modified or supplemented under this Section 15, by providing notice to you. In the event that Zebra provides such notice, you hereby waive any right to institute a court or other dispute resolution proceeding with respect to such controversy or dispute and acknowledge arbitration in accordance with this Section 15 as the sole and exclusive means of resolving such controversy or dispute. The arbitration proceeding will take place in Chicago, Illinois and be conducted in the English language. The arbitration panel will consist of 3 arbitrators, one arbitrator appointed by each party and a third neutral arbitrator appointed by the two arbitrators designated by the parties. Any communication between a party and any arbitrator will be directed to the AAA for transmittal to the arbitrator. The parties expressly agree that the arbitrators will be empowered to, at either party’s request, grant injunctive relief. The arbitral award will be the exclusive remedy of the parties for all claims, counterclaims, issues or accountings presented or pleaded to the arbitrators. Judgment upon the arbitral award may be entered in any court that has jurisdiction thereof. Any additional costs, fees or expenses incurred in enforcing the arbitral award will be charged against the party that resists its enforcement. Nothing in this Section will prevent Zebra from seeking interim injunctive relief against you or filing an action against you to collect unpaid and past due amounts in any court of competent jurisdiction.

16. Injunctive Relief. You acknowledge that, in the event you breach any provision of this Agreement, Zebra will not have an adequate remedy in money or damages. Zebra shall therefore be entitled to obtain an injunction against such breach from any court of competent jurisdiction immediately upon request without posting bond. Zebra's right to obtain injunctive relief shall not limit its right to seek further remedies.

17. Entire Agreement. This Agreement constitutes the entire understanding and agreement of the parties and supersedes any and all prior or contemporaneous representations, understandings and agreements between the parties with respect to the subject matter of this Agreement. If any provision of this Agreement is held invalid, the remainder of this Agreement shall continue in full force and effect.

18. Assignment. You may not assign this Agreement or any of your rights or obligations hereunder (by operation of law or otherwise) without the prior written consent of Zebra. Zebra may assign this Agreement and its rights and obligations without your consent. Subject to the foregoing, this Agreement shall be binding upon and inure to the benefit of the parties to it and their respective legal representatives, successors and permitted assigns.

19. Modification. No modification of this Agreement shall be binding unless it is in writing and is signed by an authorized representative of the party against whom enforcement of the modification is sought.

20. Waiver. The failure by a party to exercise any right hereunder shall not operate as a waiver of such party's right to exercise such right or any other right in the future.

21. QUESTIONS. Should you have any questions, or if you desire to contact Zebra for any reason, please contact the Zebra subsidiary serving your country, or write:

Zebra Technologies International, LLC
333 Corporate Woods Parkway
Vernon Hills, Illinois 60061

Effective May 2006.



Zebra Technologies Corporation

333 Corporate Woods Parkway
Vernon Hills, Illinois 60061.3109 U.S.A.
Telephone: +1 847.793.2600
Facsimile: +1 847.913.8766

Zebra Technologies Europe Limited

Zebra House
The Valley Centre, Gordon Road
High Wycombe
Buckinghamshire HP13 6EQ, UK
Telephone: +44 (0) 1494 472872
Facsimile: +44 (0) 1494 450103

Zebra Technologies Asia Pacific, LLC

16 New Industrial Road
#05-03 Hudson TechnoCentre
Singapore 536204
Telephone: +65 6858 0722
Facsimile: +65 6885 0838