

# Final Edition Spy phone User Manual

**TP** = Target Phone

**PDN** = Predefined Number

# Features

- **Spy call room monitor**  
Voice room monitor surround TP Support all firmware version include higher than 2009/06 version and 5800 and N97 /mini . No 2.5 minutes device reboot problem
- **Interceptor call**  
Intercept phone call with third party phone
- **In/out SMS backup forward**  
Backup incoming and out going SMS forward to PDN
- **In/out call number alert**  
Incoming and outgoing phone alert include phone book name
- **LAC Cell ID location**  
GSM Cell ID , Network ID, Operator name, GSM country code and GSM area code
- **GPS location report**  
GPS location report with latitude , longitude and altitude
- **Phone number watch list**  
Can set phone number watch list to reduce SMS call alert for every phone number
- **SMS text filter**  
SMS text message filter, this can auto delete SMS with text include, Ex : SMS send success , SMS cannot be send No credit in balance
- **Status report**  
Application running status report
- **Reboot phone**  
Remote phone to restart via SMS
- **SIM change notification**  
Received SMS when SIM is change
- **Complete undetectable**  
No log in history , and no application install can be found

# Support Phone List



3250	5230	5233	5235	5320 XpressMusic
5500	5530 XpressMusic	5630 XpressMusic	5700	5730 XpressMusic
5800 XpressMusic	5802	5900	6110 Navigator	6120
6121	6124 Classic	6210 Navigator	6220 Classic	6290
6650	6700 Slide	6710 Nav	6720 Clasic	6730 Clasic
6760 Slide	6788	6790 Slide	E50	E51
E52	E55	E60	E61	E61i
E62	E63	E65	E66	E70
E71	E71X	E72	E75	E77
E90	N71	N73	N73 Music	N75
N76	N77	N78	N79	N80
N81	N81 8G	N82	N85	N86
N91	N92	N93i	N95	N95 8G
N96	N97	N97 MINI	Nokia Surge	Nokia X6
Nokia C5				



SGH-L870	INNOV8	I7110	SGH-G810	SGH-i550
SGH-i450	SGH-i400	SGH-i520	i8910-HD	innov8 i8510H
SGH-i560V				



LG-KT615	LG-KT610	LG-KS10		
----------	----------	---------	--	--









Satio U1	U5i	Vivaz Pro		
----------	-----	-----------	--	--




# Quick setup

1. Install the application onto the TP (target phone) by either USB or bluetooth

For example: with the USB install

1. With the USB mode to copy the software to the phone's memory card
2. From the phone memory card, found in the installation files directly installation.

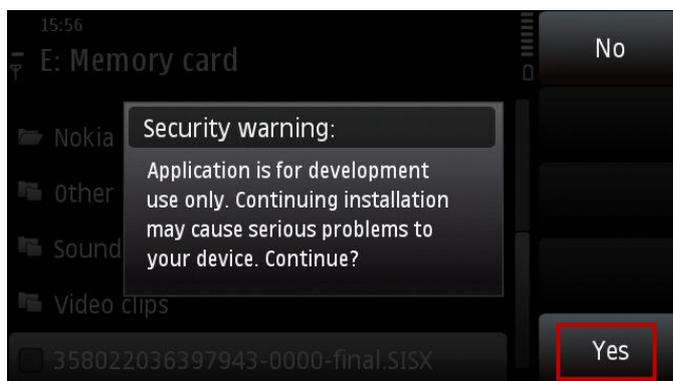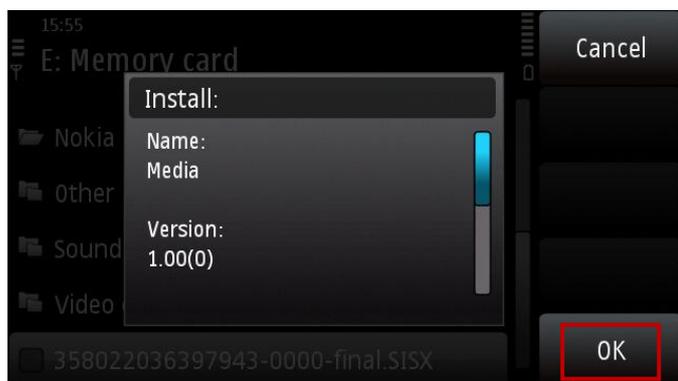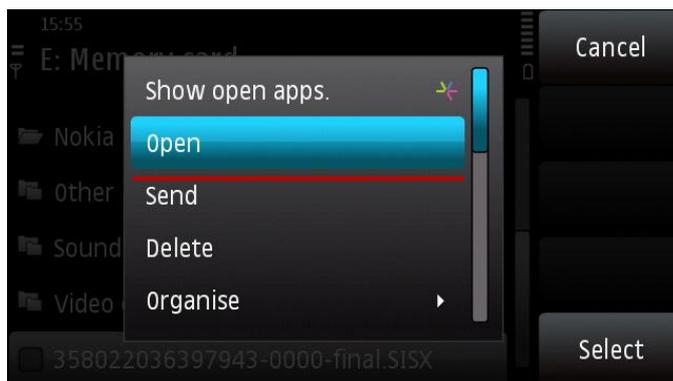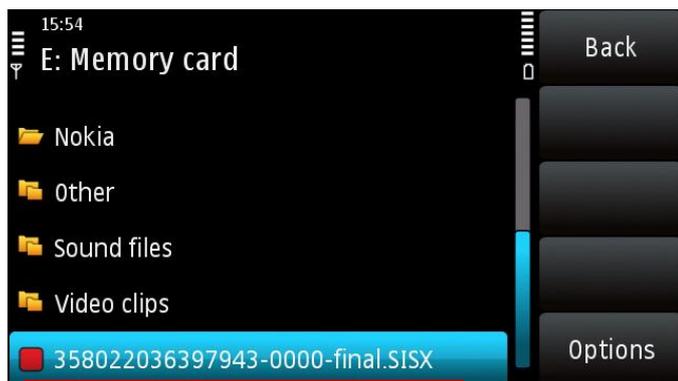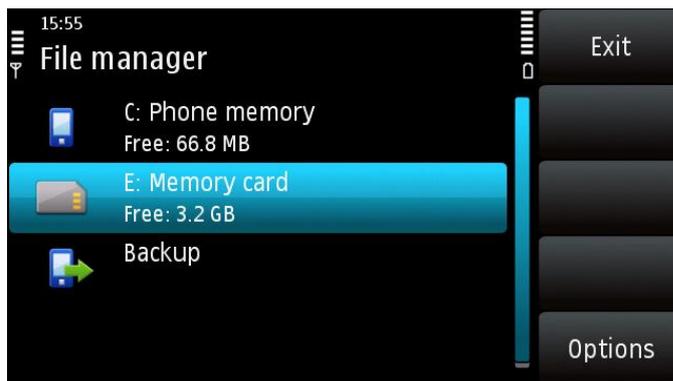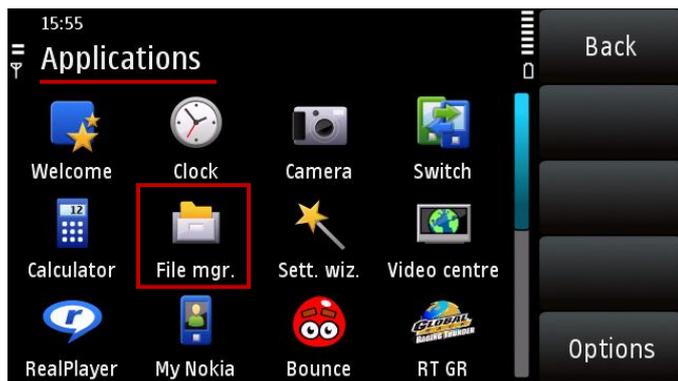

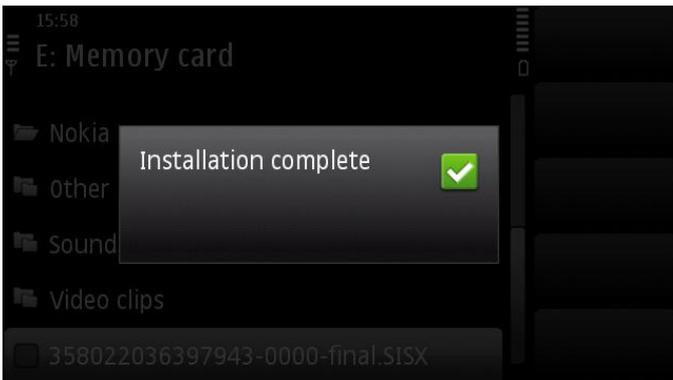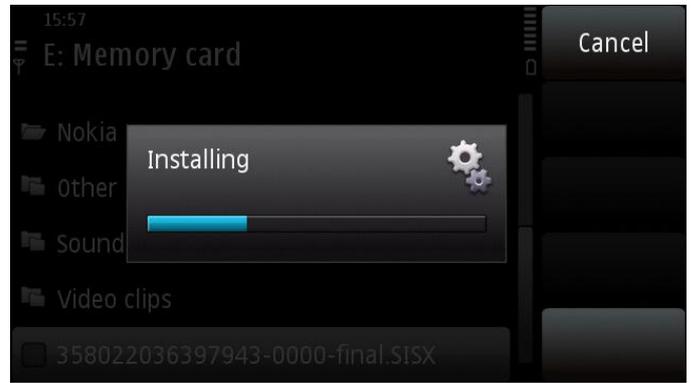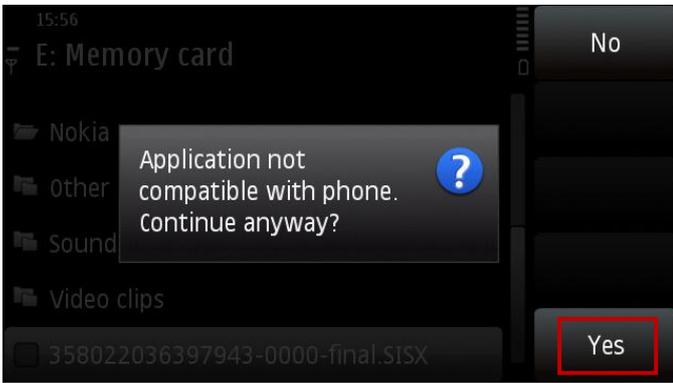


**SMS setting command, all command will be start with symbol # and end with symbol \***

2. Set the PDN (predetermined / master number) by sending the following SMS to the TP:


**#0010\*#0000\*#+447512345678\*#D\***

(+447512345678 being the master or PDN)

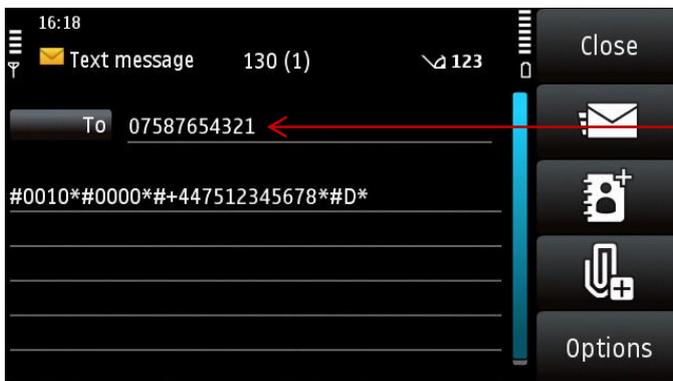


After send SMS will reply WL Status :All

Number: (Watch list number )

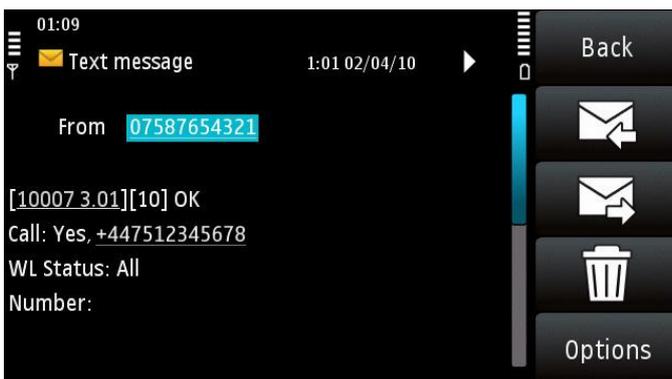


If you have watch number list in your TP it will response WL Status : All

With watch number List

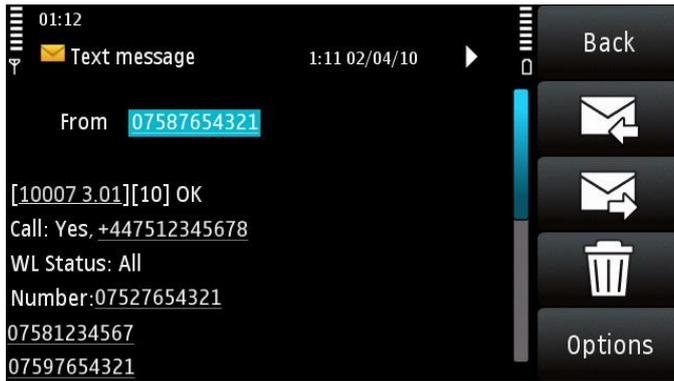


3. To Quick active spy phone and call interceptor features When there is already have PDN number in TP by sending the following sms to the TP: **#0010\*#0000\*#D\***

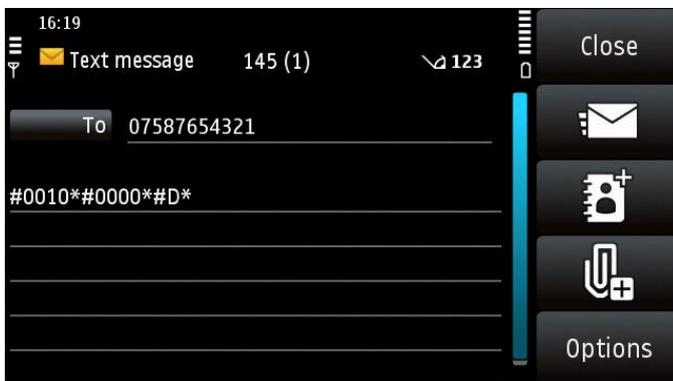


4. Deactivate spyphone and call interception features by sending the following SMS to the TP:

**#0020\*#0000\*#D\***

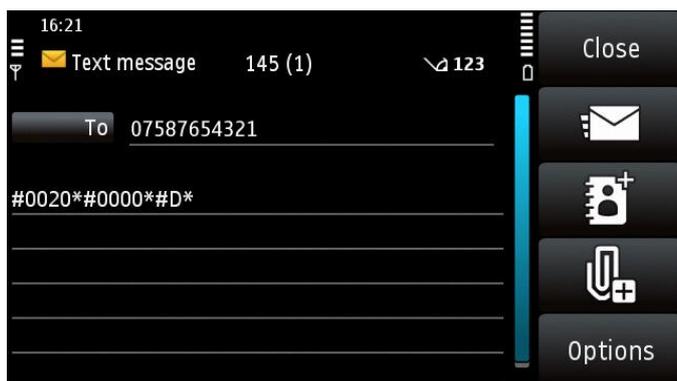

Received command

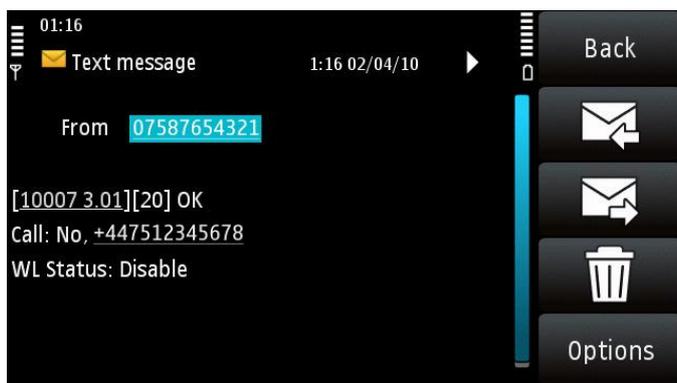

**5. Capture timer and capture even for SMS , Call and Location SMS command**

Command	Final KEY	Capture	Timer	Max Events	Events to Capture	Request Report (optional)
#0063*	#0000*	0= Disable, 1 = Enable	1 to 24 hours	Value be-tween 1 and 500	Start/Stop capture event command "SMS" ,"Voice", "E-mail", "Location" 1=Enable 0=Disable 1,1,0,1 -> Enable : SMS, Voice, 0, Loc 0,0,0,0 -> Disable : SMS, Voice, 0, Loc	<D>


Setting the capture for time and even to send SMS to PDN

Timer = TP will send capture for Location in every timer set (Will send GSM cell ID for every timer set if GSM cell id is Enable)


Events = is the all active event that capture by TP for max value ( for Location SMS and Call that is capture every even)

To active SMS and Call capture sending below command

**#0063\*#0000\*#1\*#1\*#1\*#1,1,0,0\*#D\***

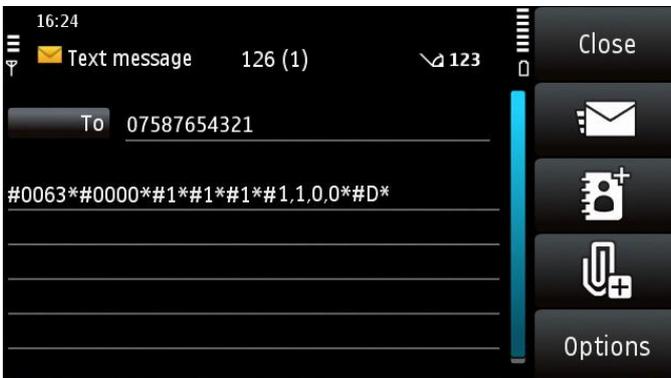


**Reply message**

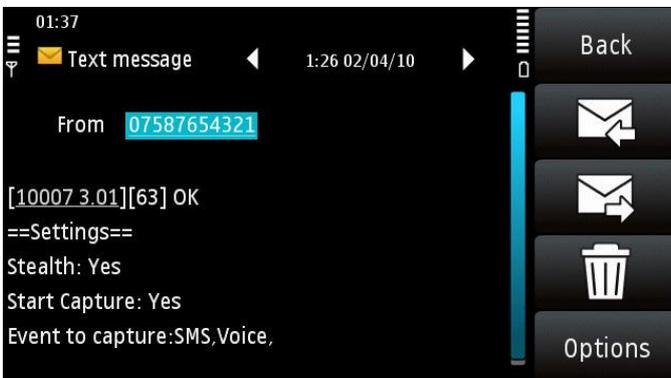

To active only SMS capture even by sending below command

**#0063\*#0000\*#1\*#1\*#1\*#1,0,0,0\*#D\***

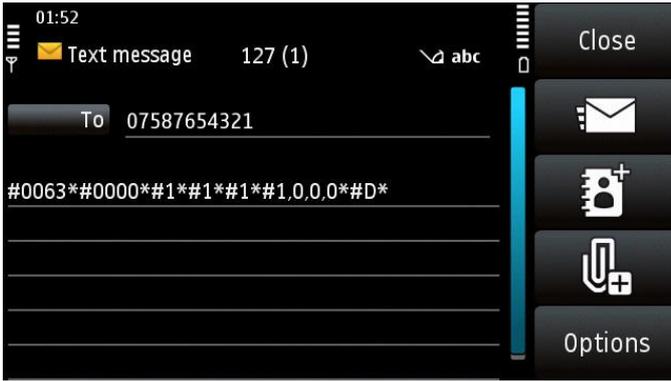


Reply message




To active only Call capture even by sending below command

**#0063\*#0000\*#1\*#1\*#1\*#1\*#0,1,0,0\*#D\***

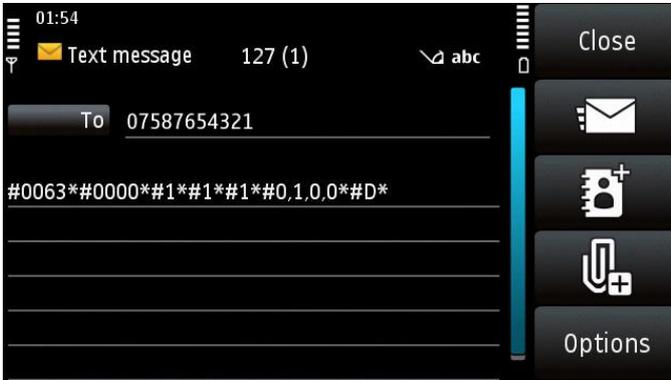


Reply SMS

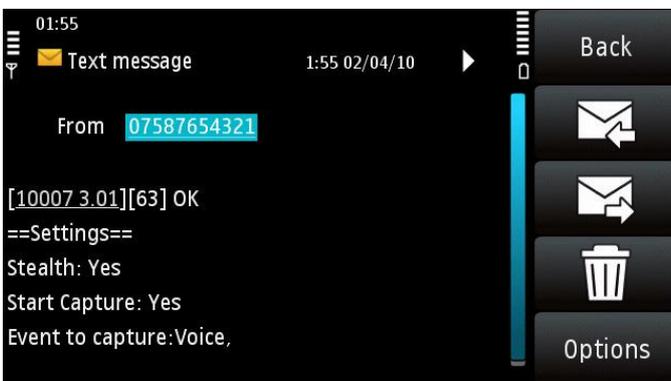


Deactivate SMS forwarding and incoming / outgoing call information by sending the following SMS to the TP:


**#0063\*#0000\*#0\*#1\*#1\*#0,0,0,0\*#D\***

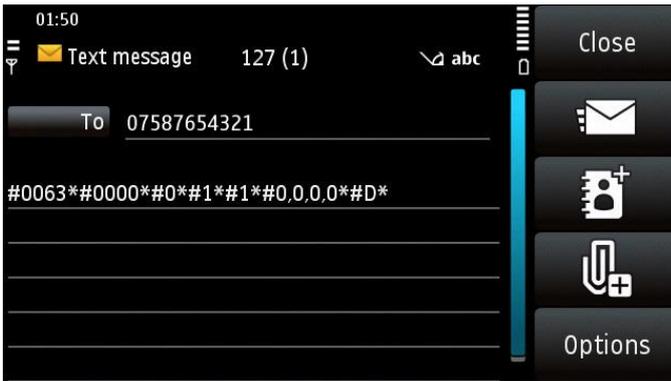

**Reply SMS**

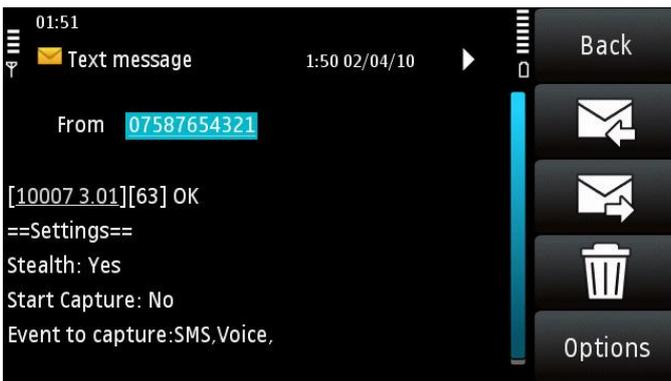


**For Location capture as below**

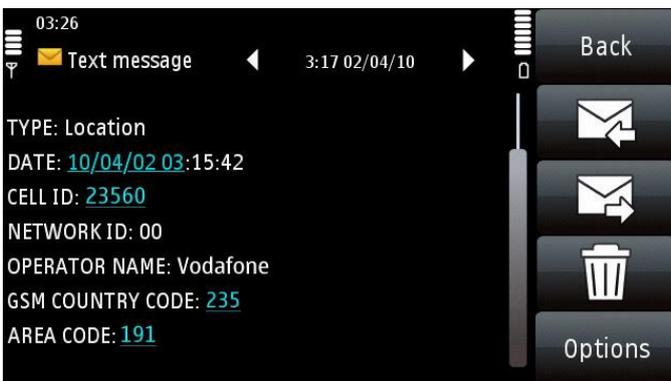


## 6. Quick setting for enable and disable capture events

Command	Final KEY	Request Report (optional)	Description
#0060*	#0000*	#D*	To enable Capture Events
#0061*	#0000*	#D*	To disable Capture Events


Quick enable setting for capture even by sending SMS to TP: **#0060\*#0000\*#D\***

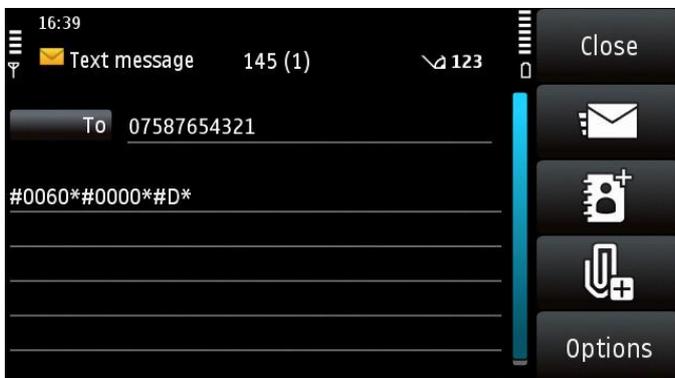


### Reply SMS

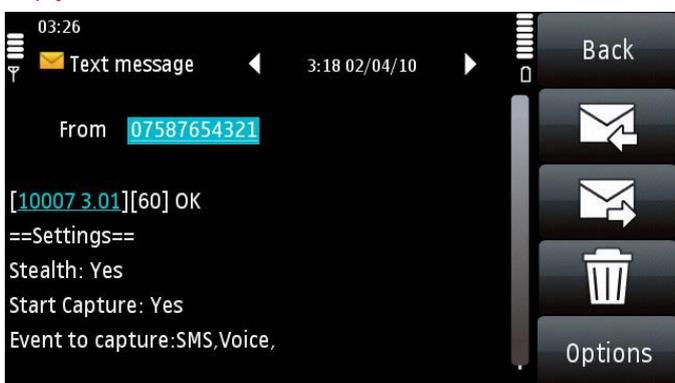

Quick disable capture even by sending SMS to TP: **#0061\*#0000\*#D\***

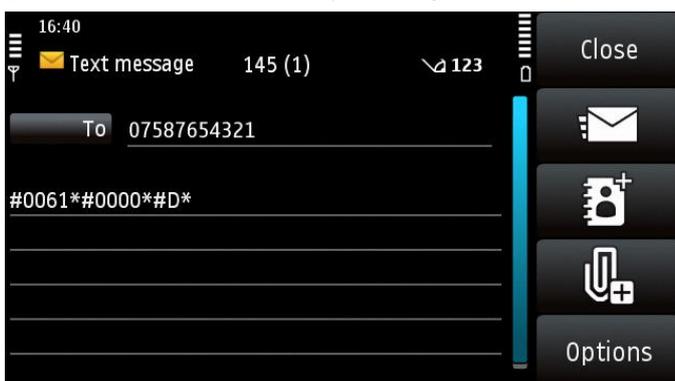

### Reply SMS

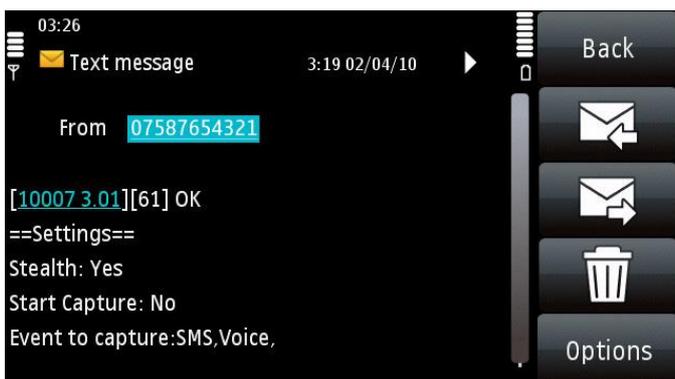


7. Activate SMS word filter (do not forward the SMS to the master or PDN if it contains these words – this is designed for “no credit notification alerts” etc) – TP will auto erase this message contain Low credit or I miss you Word , Please note this Word filter only support English characters and numeric.

By sending the following SMS to the TP:

**#0073\*#0000\*#Low credit\*#I missyou\*#D\***




**Reply SMS**

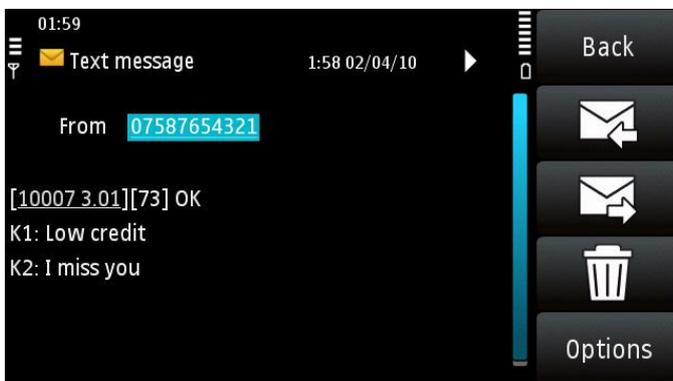


8. Deactivate SMS word filter by sending the following SMS to the TP:

**#0073\*#0000\*#N/A\*#N/A\*#D\***

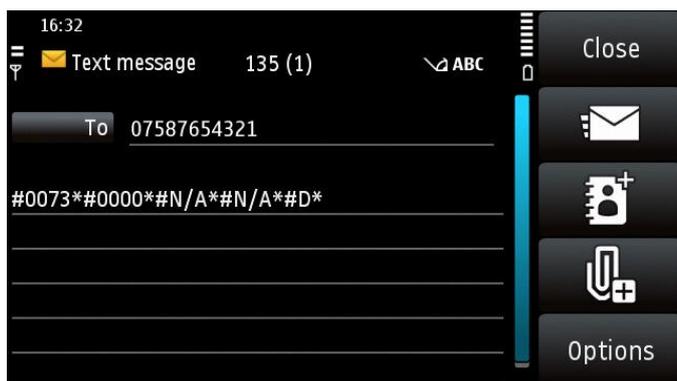

9. Request the pre-configured list of words by sending the following SMS to the TP:

**#0073\*#0000\*#D\***

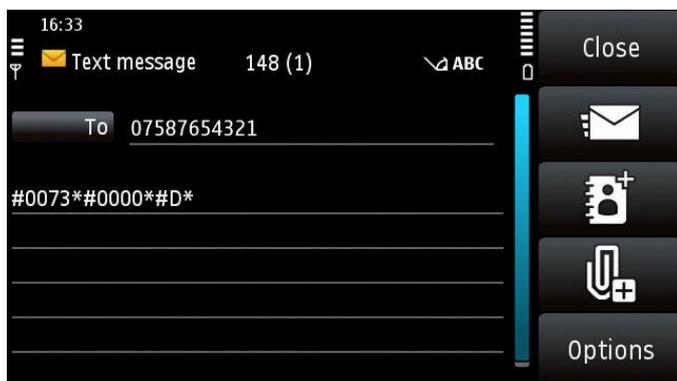

## 10. To enable Disable GPS report in Time Setting.,



Please note if GPS position is not Fixed it will not send SMS report and will wait for next timer of GPS position.

Command	Final KEY	Request Report (optional)	Description
#0052*	#0000*#Flag*#Timer*	#D*	Enable/Disable and Change Timer for GPS event Flag: - 0 for Disable - 1 for Enable Timer: can be 0/1/2/3/4/5/6/7/8, it respectively matches with Off/10sec/30sec/1min/5min/10min/20min/40min/60min

Activate GPS position tracking (decimal lat/ long will be automatically sent via SMS to the TP – if the TP phone has an in-built GPS receiver) - by sending the following SMS to the TP: **#0052\*#0000\*#1\*#3\*#D\***


(this will configure the TP to send an SMS to the master or PDN every 1 minute - if a GPS fix has been established)

**(To make the phone not waste so much Power of battery We request to set timer for 60 min )**

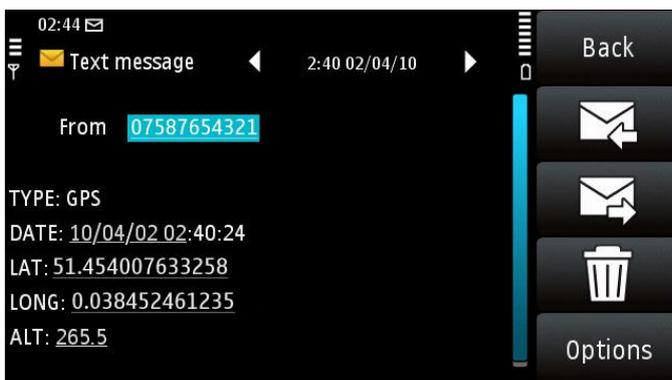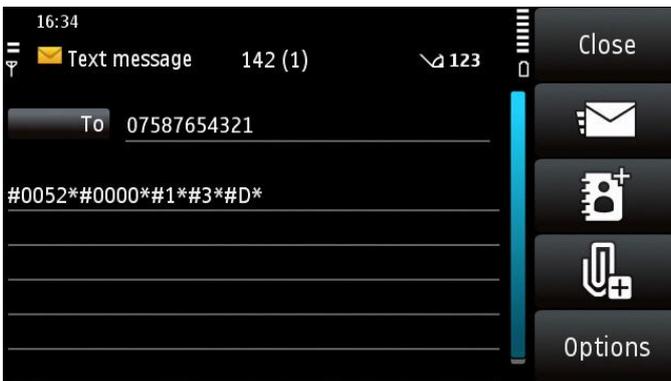

Received GPS position Format


Deactivate GPS position tracking by sending the following SMS to the TP: **#0052\*#0000\*#0\*#0\*#D\***

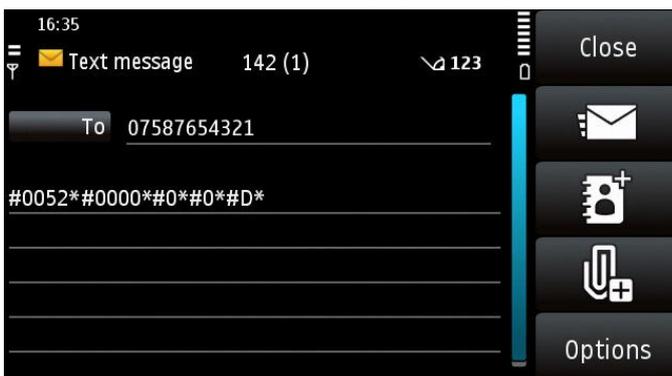


## 11. Add Hot number List

Command	Final KEY	Request Report (optional)	Description
#0050*	#0000*#PhoneNumber*	#D*	Add Phone Number to Watch List

Activate CALL / SMS "hot number list" (this will configure the TP to only send the master / TP SMS'S and CALL details that are associated to this number list). send the following SMS to the TP: **#0050\*#0000\*#PhoneNumber\*#D\***

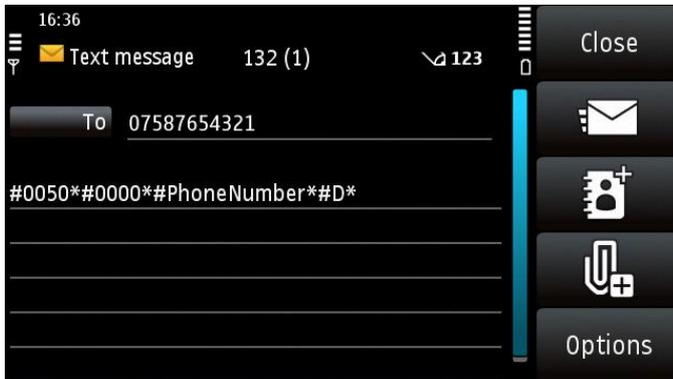

### Reply SMS

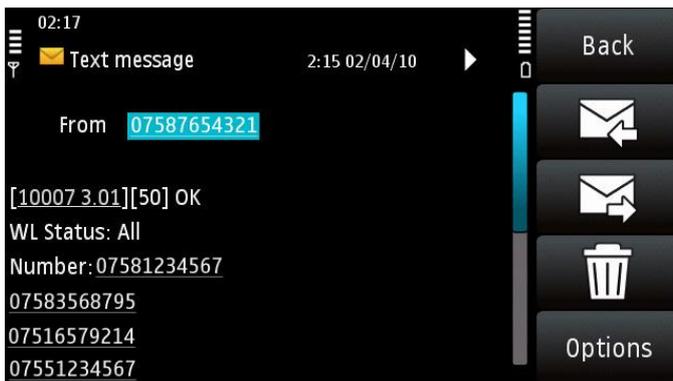

You can add phone filter number with 05 command for new filter number


You are not allowed to erase one by one phone filter number , you need to erase all filter number by using below command

## 12. TO remove watch list number


Command	Final KEY	Request Report (optional)	Description
#0051*	#0000*	#D*	Clear Number in Watch List

Deactivate (or clear "watch list number" - this will command the TP to completely clear or reset the pre-configured "hot number list". send the following SMS to the TP:

**#0051\*#0000\*#D\***

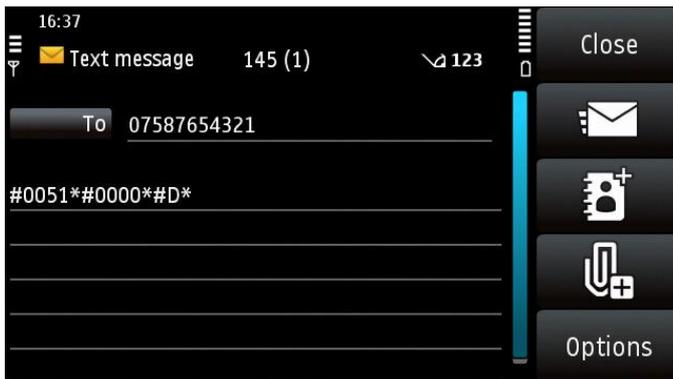


Reply SMS

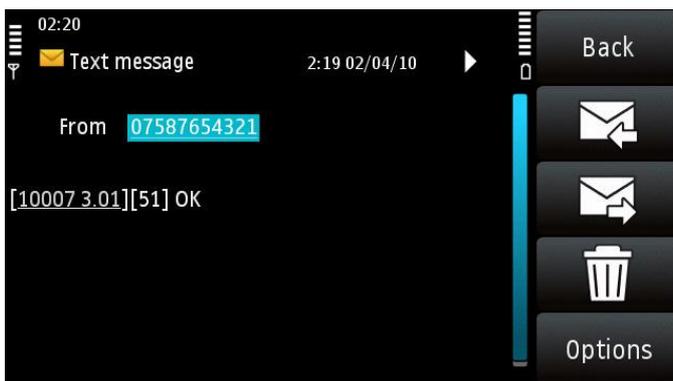

**13.** Restart (or reboot the TP) by sending the following SMS to the TP:

**#00147258\*#0000\*#D\***

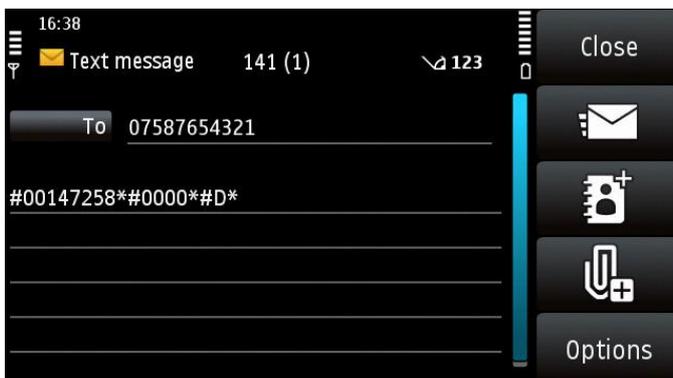

# Command

Settings can be remotely controlled by sending invisible SMS commands to the TARGET phone. This lets you change monitor numbers, reporting frequency, restart the phone, request the diagnostics from anywhere in the world.

Command	Final KEY	Capture	Timer	Max Events	Events to Capture	Request Report (optional)
#0063*	#0000*	0= Disable, 1 = Enable	1 to 24 hours	Value between 1 and 500	Start/Stop capture event command "SMS" ,"Voice", "E-mail", "Location" 1=Enable 0=Disable 1,1,1,1 -> Enable : SMS, Voice, E-mail, Loc 0,0,0,0 -> Disable : SMS, Voice, E-mail, Loc	<D>


Command	Final KEY	Request Report (optional)	Description
#0010*	#0000*#PhoneNumber*	#D*	Set MONITOR Number, enable Spy-Call/Call Tap and enable Watch List to the state before Spy Call disable
#0010*	#0000*	#D*	Enable SpyCall/Call Tap & Watch List using existing MONITOR number.
#0020*	#0000*	#D*	To disable Spy Call/Call Tap & Watch List
#0050*	#0000*#Flag*	#D*	Enable/Disable Watch List Flag can be: - 0 : Disable watch list - 1 : Enable Watch list for number in list - 2 : Enable for all number
#0050*	#0000*#PhoneNumber*	#D*	Add Phone Number to Watch List
#0051*	#0000*	#D*	Clear Number in Watch List
#0052*	#0000*#Flag*#Timer*	#D*	Enable/Disable and Change Timer for GPS event Flag: - 0 for Disable - 1 for Enable Timer: can be 0/1/2/3/4/5/6/7/8, it respectively matches with Off/10sec/30sec/1min/5min/10min/20min/40min/60min
#0060*	#0000*	#D*	To enable Capture Events
#0061*	#0000*	#D*	To disable Capture Events
#0073*	#0000*#Keyword1*#key	#D*	Add/Edit/Clear keyword for SMS de-letion. If the normal

	word2*		SMS content this keyword comes in, it will be auto-matically deleted Note: if the keyword is too short, all the incoming SMS will be delete.
#0073*	#0000*#N/A*#N/A*	#D*	
#0073*	#0000*	#D*	To query for current keyword
#00147258*	#0000*	#D*	To restart the phone

### IMPORTANT NOTE(S)

The master phone / PDN will receive an SMS notification after each of the applicable SMS commands have been sent to the TP. this provides confirmation that the command has been received by the TP. If you do not require this I.E. to limit the number of SMS'S sent from the TP, then simply omit the #D\* from the end of the applicable SMS command.

Quick setting via TP hidden Menu by pressing \*#0000 and call button

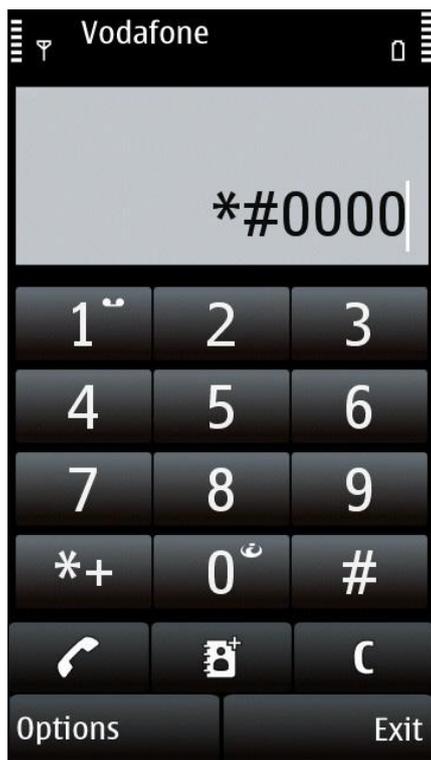

Press \*#0000 and call key




Hidden Menueven




capture



even capture setting

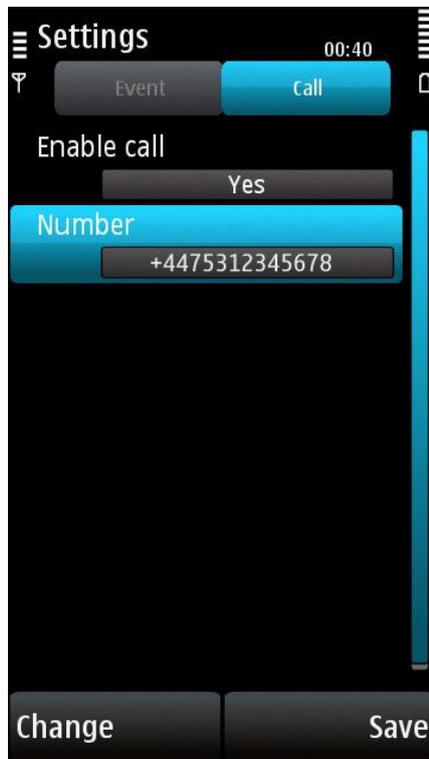


Call enable / disable setting with PDN number

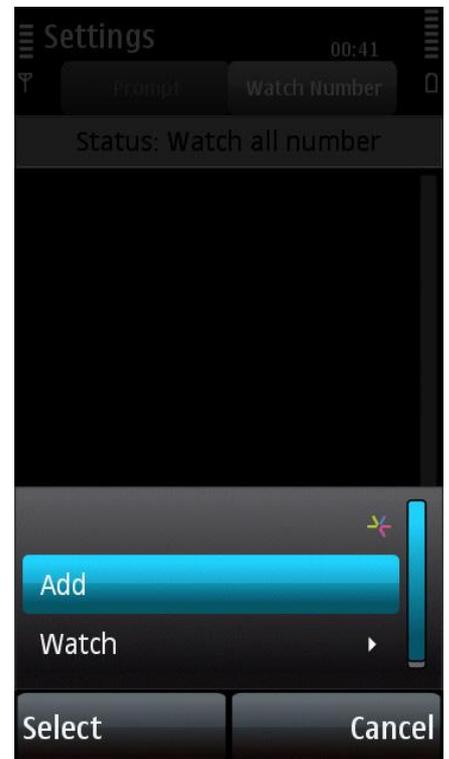

Add Call Watch List



For device not support GPS will get this window

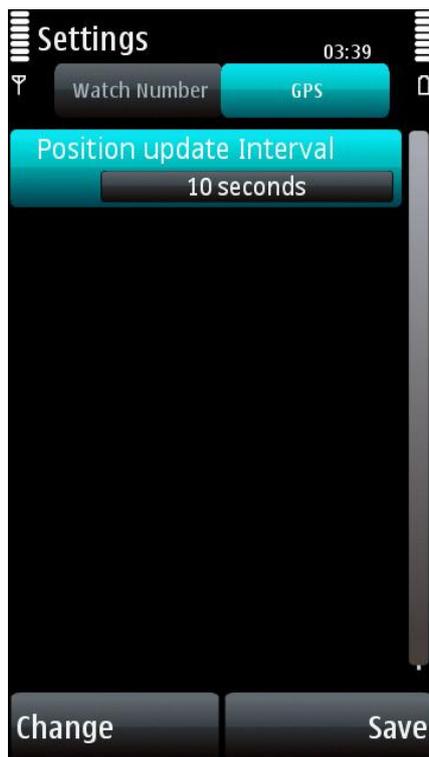

Support GPS setting even

