

### Front View:

1. Eight sockets for PC2-5300 Fully Buffered DIMMs (DDR2-667)
2. Hot-plug fans, full redundancy
3. Systems Insight Display
4. Quick release lever for rapid server access
5. Support for eight Small Form Factor hot plug hard drives bays
6. Front LEDs (show server status) and Unit Identification button/LED (for easy in rack server identification)
7. Two front USB ports (2 rear USB ports, 1 internal USB port)
8. Intel Xeon Processor (Performance models include two processors)
9. Hot plug power supply, redundancy option (High performance models include redundant power supply)
10. Three full-size PCI-E expansion slots in standard expansion cage (or optional mixed PCI-X/E expansion cage). Two additional low-profile PCI-E slots embedded on the system board. Four slots available for use; one consumed by Smart Array controller (Base and Performance models)
11. Quick removal access panel

### Rear View:

1. Torx service tool
2. Optional pass through cable door
3. Two Embedded NC373i Multifunction Gigabit Server Adapters with TCP/IP Offload Engine
4. Hot plug power supply bays, redundancy option (High performance models include redundant power supply)
5. Integrated Lights-Out 2 (iLO 2) Remote management port
6. Video Port
7. Two USB 2.0 Ports
8. Serial Port
9. Keyboard Port
10. Mouse PS/2 Port
11. Two low-profile PCI Express x8 slots. Slot 1 is consumed by the P400 Smart Array controller. (Base and Performance models)
12. Three full-size PCI Express slots in standard cage (or optional mixed PCI-X/E expansion cage)

## What's New

- New Intel® Xeon® Dual-core 5200 series processors

# At A Glance

The HP ProLiant DL380, the world's best selling server, delivers on its history of design excellence with enterprise-class uptime and manageability, proven 2-way Intel® Xeon® performance, and 2U density for a variety of rack deployments and applications.

- **Processors:**
  - Quad-Core and Dual-Core Intel® Xeon® processors for blazing performance; systems support up to 2 processors (2 processors standard on all Performance models)
  - Preconfigured Performance models save valuable deployment time at a discounted bundle price
  - Intel® 5000P chipset
- **Memory:**
  - Up to 32 GB PC2-5300 Fully Buffered DIMMs (DDR2-667) with 4:1 and 2:1 interleaving available, online spare and mirrored memory capabilities
- **Storage Controller:**
  - Performance Models: HP Smart Array P400/512MB BBWC Controller (RAID 0/1/1+0/5/6)
  - Base Models: HP Smart Array P400/256MB Controller (RAID 0/1/1+0/5)
  - Entry Models: HP Smart Array E200/64MB Controller (RAID 0/1/1+0)
- **Internal Drive Support:**
  - (8) small form factor (SFF) hot-plug drive bays to support Serial-attached SCSI (SAS) and Serial ATA (SATA) drives
  - Slimline media bay supporting Optical or Floppy drive
- **Network Controller:**
  - Two embedded NC373i Multifunction Gigabit Network Adapters with TCP/IP Offload Engine, including support for Accelerated iSCSI through an optional Licensing Kit
- **Expansion Slots:**
  - Four available PCI-Express slots, optional mixed PCI-X / PCI-Express configurations available (see "Standard Features -Expansion Slots" section below for more details)
- **USB Ports:**
  - USB 2.0 support
  - 5 total ports: (2) ports up front; (2) ports in back; (1) port internal
- **Redundancy:**
  - Fully redundant hot plug fans (N+1)
  - Hot plug power supply with optional redundancy (Included in Performance models)
- **Management:**
  - HP Insight Control Environment server management software
  - Integrated Lights-Out 2 featuring Integrated Remote Console with KVM over IP performance over shared network access
  - HP Power Meter and Power Regulator for ProLiant, delivering integrated power monitoring and server level, policy based power management with industry leading energy efficiency and savings on system power and cooling costs.
  - Automatic Server Recovery (ASR), ROM Based Setup Utility (RBSU), HP System Insight Manager, Status LED: including system health and UID and SmartStart
  - System Insight Display on the front bezel for quick and easy server diagnostics
- **Form Factor:**
  - Rack (2U), (3.5-inch); Depth 26 inches (66 cm)
- **Deployment/Serviceability:**
  - Quick Deploy Rail System includes sliding universal rails, an ambidextrous cable management arm and quick release levers for fast and easy serviceability
  - Tool-less access to all system components for easy in rack serviceability
- **Warranty:**
  - This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. SATA hard drives have a one-year warranty.  
**NOTE:** Server Warranty includes 3-Year Parts, 3-Year Labor, 3-Year Onsite support with next business day response. Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

**NOTE:** For a brief, printer friendly data sheet that describes this product and informs you of the essential capabilities and specifications, please visit: <http://h71028.www7.hp.com/ERC/downloads/5983-0605EN.pdf>.

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

**Processor**

One of the following depending on Model

- Quad-Core Intel® Xeon® Processor X5460 (3.16 GHz, 120 Watts, 1333 Front Side Bus (FSB))
- Quad-Core Intel® Xeon® Processor X5450 (3.0 GHz, 120 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5450 (3.00 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5440 (2.83 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5430 (2.66 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5420 (2.50 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5410 (2.33 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5405 (2.00 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor X5365 (3.00 GHz, 120 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor X5355 (2.66 GHz, 120 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5345 (2.33 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor L5335 (2.00 GHz, 50 Watts, 1333 FSB, Low Voltage)
- Quad-Core Intel® Xeon® Processor E5335 (2.00 GHz, 80 Watts, 1333 FSB)
- Quad-Core Intel® Xeon® Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB)
- Quad-Core Intel® Xeon® Processor L5320 (1.86 GHz, 50 Watts, 1066 FSB)
- Quad-Core Intel® Xeon® Processor E5310 (1.60 GHz, 80 Watts, 1066 FSB)
- Dual-Core Intel® Xeon® Processor X5260 (3.33 GHz, 80 Watts, 1333 FSB)
- Dual-Core Intel® Xeon® Processor E5205 (1.86 GHz, 65 Watts, 1066 FSB)
- Dual-Core Intel® Xeon® Processor 5160 (3.0 GHz, 80 Watts, 1333 FSB)
- Dual-Core Intel® Xeon® Processor 5150 (2.66 GHz, 65 Watts, 1333 FSB)
- Dual-Core Intel® Xeon® Processor 5148 (2.33 GHz, 40 Watts, 1333 FSB, Low Voltage)
- Dual-Core Intel® Xeon® Processor 5140 (2.33 GHz, 65 Watts, 1333 FSB)
- Dual-Core Intel® Xeon® Processor 5130 (2.0 GHz, 65 Watts, 1333 FSB)
- Dual-Core Intel® Xeon® Processor 5120 (1.86 GHz, 65 Watts, 1066 FSB)
- Dual-Core Intel® Xeon® Processor 5110 (1.6 GHz, 65 Watts, 1066 FSB)

**NOTE:** Up to 2 processors supported. Performance configurations include two processors. Mixing different processor models is not supported.

---

**Cache Memory**

One of the following depending on Model

- 12MB (2 x 6MB) Level 2 cache (5400 series)
- 8MB (2 x 4MB) Level 2 cache (5300 series)
- 6MB (2 x 3MB) Level 2 cache (5200 series)
- 4MB (1 x 4MB) Level 2 cache (5100 series)
- 4MB (2 x 2MB) Level 2 cache (5000 series)

---

**Chipset**

Intel® 5000P Chipset

**NOTE:** For more information regarding Intel chipsets, please see the following URL: <http://www.intel.com/products/server/chipsets/>.

---

**Upgradeability**

Upgradeable to 2 processors (8 cores)

Future upgradeable to Xeon® Series 5400/5300 Quad-Core processors (Please contact your regional sales support to determine quad core upgradeability. Some of the earlier shipping models may not support this upgrade). 5100 Dual-Core models are not upgradeable to the 5200 Dual-Core processors.

---

**Memory Protection**

Advanced ECC (multi-bit error protection), Online Spare, Mirroring  
4-way Interleaving



<b>Memory</b>	Type	PC2-5300 Fully Buffered DIMMs (DDR2-667) with 4:1 and 2:1 interleaving available (interleaving requires identical DIMMs)
	Standard (Entry Models)	1 GB (2 x 512 MB)
	Standard (Base Models)	2 GB (2 x 1 GB)
	Standard (Performance Models)	4 GB (4 x 1 GB)
	Maximum	32 GB (8 x 4 GB)

**NOTE:** Memory DIMMs in systems with the Front Side Bus (FSB) running at 1333 MHz will run at 667 MHz and in systems with a FSB running at 1066 MHz or 667 MHz the memory DIMMs will run at 533 MHz.

**Network Controller** Two embedded NC373i Multifunction Gigabit Network Adapters with TCP/IP Offload Engine, including support for Accelerated iSCSI through an optional Licensing Kit

**Expansion Slots**

<b>Embedded Slots</b>	<b>Slot Number</b>	<b>Bus Speed*</b>	<b>Bus Number**</b>	<b>Device Number***</b>	<b>Hot Plug</b>	<b>PCI Voltage</b>
	1	x4 PCIe (x8 connector)	6	0	no	N/A
	2	x4 PCIe (x8 connector)	11	0	no	N/A

**NOTE:** Embedded slots support half-height low profile cards. For Base and Performance models, the integrated Smart Array P400 (SAS Controller) is installed in Slot 1.

<b>PCIe Riser (Standard)</b>	<b>Slot Number</b>	<b>Bus Speed*</b>	<b>Bus Number**</b>	<b>Device Number***</b>	<b>Hot Plug</b>	<b>PCI Voltage</b>
	3	x4 PCIe (x8 connector)	14	0	no	N/A
	4	x8 PCIe (x16 connector)	23	0	no	N/A
	5	x8 PCIe (x16 connector)	19	0	no	N/A

**NOTE:** Riser slots support full-size PCIe/PCI-X cards. For Entry model, the standard Smart Array E200 Controller with 64MB Cache (SAS Controller) is installed in Slot 3.

<b>PCIe/PCI-X Riser (Optional)</b>	<b>Slot Number</b>	<b>Bus Speed*</b>	<b>Bus Number**</b>	<b>Device Number***</b>	<b>Hot Plug</b>	<b>PCI Voltage</b>
	3	x8 PCIe (x16 connector)	23	0	no	N/A
	4	64-bit/133MHz PCI-X	18	1	no	3.3 Volt
	5	64-bit/133MHz PCI-X	18	2	no	3.3 Volt

**NOTE:** Server has 5 total slots with 4 slots are available for use; one slot populated by the internal storage controller.

\* x4 slots support x8 cards, but will run at x4 speeds. x8 slots support x16 cards, but will run at x4 speeds.

\*\* Default bus assignment. Inserting cards with PCI bridges may alter the actual bus assignment number.

\*\*\* Slots are enumerated differently based on OS. MS OS's enumerate from lowest to highest Device ID by bus (starting with the lowest bus).

<b>Storage Controller</b> One of the following depending on Model	Performance Models:	HP Smart Array P400/512MB BBWC Controller (RAID 0/1/1+0/5/6)
	Base Models:	HP Smart Array P400/256MB Controller (RAID 0/1/1+0/5) <b>Available upgrades:</b> 512MB battery-backed write cache (BBWC) or standalone battery for RAID 0/1/1+0/5/6
	Entry Models:	HP Smart Array E200/64MB Controller (RAID 0/1/1+0) <b>Available upgrades:</b> 128MB battery-backed write cache (BBWC) for RAID 0/1/1+0/5

<b>Storage</b>	Diskette Drive	None Standard
	Optical Drive	None Standard
	One of the following depending on Model	IDE DVD-ROM/CDRW Combo included on Performance models
	Hard Drives	None Standard

<b>Maximum Internal Storage</b>	Hot Plug SAS	1.168TB	8 x 146GB with standard internal hot plug SFF SAS drive cage
---------------------------------	--------------	---------	--

<b>Remote Management</b>	Integrated Lights Out 2 (iLO2) Standard Management:		
	<ul style="list-style-type: none"> <li>• Virtual Text Remote Console (pre-OS only)</li> <li>• Remote Serial Console</li> <li>• Virtual Power Button Control</li> <li>• Virtual Unit ID control</li> <li>• Integrated Remote Console</li> <li>• Dedicated &amp; full function shared network connectivity</li> <li>• Embedded system health</li> <li>• Browser, command line and scripted access</li> <li>• Automatic IP Configuration via DHCP/DNS/WINS</li> <li>• Industry Standard 128-bit Secure Sockets Layer (SSL) and Secure Shell security (SSH)</li> <li>• OS independent hardware health status</li> <li>• IML and iLO Event Logging</li> <li>• Support for 12 user accounts with customizable access privilege</li> </ul>		

<b>Intelligent Manageability</b>	HP Systems Insight Manager SmartStart Management Agent Redundant ROM Remote Flash ROM ROM-Based Setup Utility (RBSU) Integrated Management Log Automatic Server Recovery (ASR) Dynamic Sector Repairing (with Smart Array controller) Drive Parameter Tracking (with Smart Array controller) Hot Spare Boot <b>NOTE:</b> Upon the event of a failed processor in a multi-processing environment, the system will automatically reboot and attempt to use the remaining good processor. Pre-Failure Warranty (covers processors, SAS hard drives and memory)
----------------------------------	---

<b>Interfaces</b>	Serial	1
	Pointing Device (Mouse)	1
	Graphics	1
	Keyboard	1
	VGA	2 (1 front, 1 back)
	Network RJ-45	2
	iLO 2 remote management port	1
	USB 2.0 Ports	5 total: 2 front, 2 back, 1 internal
		<b>NOTE:</b> Please see the following URL for additional information regarding USB support: <a href="http://h18004.www1.hp.com/products/servers/platforms/usb-support.html">http://h18004.www1.hp.com/products/servers/platforms/usb-support.html</a> .

---

<b>Graphics</b>	Integrated ATI ES1000, 32MB video standard
	<ul style="list-style-type: none"><li>● 16 bit color: maximum resolution of 1600 x 1200</li><li>● 32 bit color: maximum resolution of 1280 x 1024</li></ul>

**NOTE:** Maximum resolution available via iLO 2 remote console is 1280x1024.

---

<b>Form Factor</b>	Rack (2U); Height 3.38-inch (8.59 cm); Depth: 26 inches (66 cm)
--------------------	---

---

<b>HP Insight Control Management Suites</b>	HP Insight Control Environment delivers foundation management, including remote monitoring, hardware resource deployment, health monitoring, software version control, performance monitoring, vulnerability scanning and patch management, and power management.
---	---

HP Insight Control Environment installs and licenses the following components by default using a wizard-based integrated installer:

- HP Systems Insight Manager
- HP iLO Advanced Pack
- HP Rapid Deployment Pack
- HP Insight Power Manager
- HP Performance Management Pack
- HP Vulnerability and Patch Management Pack

Additional ProLiant Essentials software and management tools included on the Insight Control Management kit can be installed manually:

- HP Server Migration Pack - Universal Edition
- HP Open Service Event Manager
- HP Instant Support Enterprise Edition

**NOTE:** Server Migration Pack - Universal Edition can be installed from the SMP Universal CD included in the Insight Control Management media kit.

**NOTE:** For additional product and licensing information about HP Insight Control Environment, visit: <http://www.hp.com/go/ice>.

HP Insight Control management suites and most HP ProLiant Essentials include a one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about this service, please visit: <http://www.hp.com/services/insight>.

---

**Server Management  
Stand Alone Software  
Product - ProLiant  
Essentials**

HP Systems Insight Manager	HP Systems Insight Manager (HP SIM) provides a unified, secure and extensible standards-based environment to centrally manage servers, storage and other infrastructure devices, (both HP and non-HP) across multiple operating system platforms.
ProLiant Essentials Rapid Deployment Pack	Rapid Deployment Pack (RDP) extends HP Systems Insight Manager with a complete deployment solution for HP ProLiant servers. RDP provides a central location to configure server hardware, deploy Windows, Linux and VMware ESX operating environments and install HP ProLiant Support Pack drivers using images and scripted profiles. For more information, visit: <a href="http://www.hp.com/go/rdp">http://www.hp.com/go/rdp</a> .
ProLiant Essentials Server Migration Pack - Universal Edition	Upgrading, replacing, or virtualizing your existing server? Effortlessly transition to new virtual or physical HP ProLiant servers or BladeSystem with automated, accurate and affordable migration of OS, application and data. SMP Universal automates the manual processes required for migrating servers between physical or virtual platforms, whether migrating to VMware or Microsoft virtual machines. SMP Universal allows all of the following migrations: <ul style="list-style-type: none"><li>● physical to ProLiant</li><li>● physical to virtual</li><li>● virtual to virtual</li><li>● virtual to ProLiant</li></ul>
ProLiant Essentials Performance Management Pack	<b>NOTE:</b> For more information, visit: <a href="http://www.hp.com/go/migrate">http://www.hp.com/go/migrate</a> . Performance Management Pack (offered exclusively through the Insight Control suites) - a performance management solution that identifies and explains hardware performance bottlenecks on ProLiant servers and attached options enabling users to better utilize their valuable resources.
Integrated Lights-Out Advanced Pack	Upgrades the iLO 2 processor with comprehensive remote control including Virtual KVM remote graphical console, enhanced console sharing and replay, virtual media (floppy, CD/DVD, USB key), virtual folders, and enterprise security (directory services and two-factor authentication).
Integrated Lights-Out Select Pack	Upgrades the iLO 2 processor with enhanced console sharing and replay, virtual media (floppy, CD/DVD, USB key), virtual folders, historical power reporting, power capping and enterprise security (directory services and two-factor authentication) for servers managed using remote consoles available in iLO 2 Standard and iLO 2 Standard Blade Edition.
iLO Power Management Pack	Energy-efficient management software that delivers centralized control, reliable security, and energy savings for your BladeSystem infrastructure. iPMP combines the total control of iLO 2 Advanced in the area of remote management with the energy monitoring and control of the Insight Power Manager to deliver a robust solution capable of full remote control and power management of ProLiant servers through a unified interface within HP Systems Insight Manager.
ProLiant Essentials Accelerated iSCSI Pack	Enables the embedded Multifunction network controller to serve as both a NIC and an iSCSI HBA providing access to SAN storage over the same connection used for networking. Processing of the protocol stack is offloaded to the NIC reducing CPU utilization and greatly improving the speed with which the requests are processed and sent to the network.
HP Insight Power Manager (IPM)	Upgrades the single-server remote management capabilities of iLO Select/Advanced to include centralized reporting and policy-based management of power consumption and thermal output provided by the Insight Power Manager. IPM unifies all of this functionality within a single user interface - HP Systems Insight Manager.

**NOTE:** Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to: <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials Value Pack product QuickSpecs for more information.

<b>Core Infrastructure Management</b>	SmartStart	SmartStart is a tool that simplifies server setup, providing a rapid way to deploy reliable and consistent server configurations. For more information, please visit the SmartStart Web site at: <a href="http://www.hp.com/servers/smartstart">http://www.hp.com/servers/smartstart</a> . SmartStart version supported (minimum): SmartStart 7.51
	Insight Management Agents	The Insight Management Agents should be installed on all HP servers to present system instrumentation, health and configuration information into HP Systems Insight Manager and the HP System Management Homepage. The HP System Management Homepage aggregates systems data from Insight Management Agents and other HP management tools, providing a consolidated browser-based interface for managing individual servers.  Insight Management Agents and The HP System Management Homepage are included on ProLiant Support Packs, and can also be installed using the server profiles provided with the ProLiant Essentials Rapid Deployment Pack  For additional information about the Management Agents and the HP System Management Homepage please visit the management Web site at: <a href="http://www.hp.com/servers/manage">http://www.hp.com/servers/manage</a> .
	Subscriber's Choice	Subscriber's Choice Driver and Support Alerts/Notifications is a web-based email subscription service that provides software and driver change notifications for ProLiant products. Sign up at: <a href="http://www.hp.com/go/subscriberschoice">http://www.hp.com/go/subscriberschoice</a> and customize your profile to receive various new alerts as they become available, on a weekly or monthly basis.
	ProLiant Support Packs and ROMPaq, software	The latest software, drivers, and firmware fully optimized and tested for your ProLiant server and options, available through ProLiant Support Packs the ProLiant Essentials Rapid Deployment Pack, SmartStart or downloaded from software and drivers download pages website at: <a href="http://www.hp.com/go/support">http://www.hp.com/go/support</a> .

---

<b>Industry Standard Compliance</b>	ACPI 2.0 Compliant PCI 2.2 Compliant WOL Support Microsoft® Logo certifications USB 2.0 Support
-------------------------------------	---

---

<b>Security</b>	Power-on password Keyboard password Diskette drive control Diskette boot control QuickLock, Network Server Mode Parallel and serial interface control Administrator's password
-----------------	--

---

<b>Server Power Cords</b>	An IEC13 to IEC14 jumper cord ships standard with all part numbers if connecting to a UPS or PDU. If a localized cable is desired or required for each geographic specific model, it needs to be purchased, including the US.
---------------------------	---

---

<b>UPS and PDU Power Cord Matrix</b>	Please see the UPS and PDU cable matrix that lists cable descriptions, requirements, and specifications for UPS and PDU units: <a href="http://h18004.www1.hp.com/products/servers/proliantstorage/power-protection/index.html">http://h18004.www1.hp.com/products/servers/proliantstorage/power-protection/index.html</a>
--------------------------------------	---

---

<b>Power Supply</b>	800Watt, CE Mark Compliant Optional Hot Plug AC Redundant Power Supply
---------------------	---

**OS Support**

Microsoft Windows Server 2000  
 Microsoft Windows Server 2003  
 Microsoft Windows Small Business Server 2003, R2  
 Microsoft Windows Server 2008  
 Novell NetWare  
 Red Hat Enterprise Linux  
 SUSE Linux Enterprise Server  
 SCO UnixWare, OpenServer  
 VMware Virtualization Software  
 Solaris 10 32/64-bit

**NOTE:** For more complete and up-to-date information on how to buy server operating systems from HP please visit the OS product site at:

<http://h18004.www1.hp.com/products/servers/software/OEM.html>.

**NOTE:** For a more complete and up-to-date listing of supported OSs and versions, please visit our OS Support Matrix at: <http://www.hp.com/go/supportos>.

**NOTE:** For an up-to-date listing of the latest software and drivers available for your server, please select your server: <http://h20000.www2.hp.com/bizsupport/TechSupport/Product.jsp?lang=en&cc=us&taskId=135&prodTypeId=15351&prodCatId=241435>.

**NOTE:** For more Linux OS support & certification information, please visit our the ProLiant & BladeSystem Server Linux matrix:

<http://h18004.www1.hp.com/products/servers/linux/hpLinuxcert.html>

**NOTE:** For more information on HP's Certified and Supported ProLiant Servers, please visit the VMware Server Support Matrix at:

<http://h18004.www1.hp.com/products/servers/software/vmware/hpvmwarecert.html>.

**Rack Airflow Requirements****Rack 10000 series Cabinets**

The increasing power of new high-performance processor technology requires increased cooling efficiency for rack-mounted servers. The 10000 Series Racks provide enhanced airflow for maximum cooling, allowing these racks to be fully loaded with servers using the latest processors.

**CAUTION:** If a third-party rack is used, observe the following additional requirements to ensure adequate airflow and to prevent damage to the equipment:

- Front and rear doors: If your 42U server rack includes closing front and rear doors, you must allow 830 square inches (5,350 sq cm) of hole evenly distributed from top to bottom to permit adequate airflow (equivalent to the required 64 percent open area for ventilation).
- Side: The clearance between the installed rack component and the side panels of the rack must be a minimum of 2.75 inches (7 cm).

**CAUTION:** Always use blanking panels to fill all remaining empty front panel U-spaces in the rack. This arrangement ensures proper airflow. Using a rack without blanking panels results in improper cooling that can lead to thermal damage.

**NOTE:** For additional information, refer to the Setup and Installation Guide or the Documentation CD provided with the server, or to the server documentation located in the Support section at the following URL: [www.hp.com/servers/dl380](http://www.hp.com/servers/dl380).

**Rack Kit**

The HP ProLiant DL380 quick deploy rail system provides tool-free support for racks with square or round mounting holes (including Compaq/HP 7000\*, 9000, 10000 and HP series), with an adjustment range of 24" - 36". The ambidextrous cable management arm can be mounted on either the left or right side for improved cable management.

**NOTE:** Cable management arm must be removed to access hot-plug power supplies when the cable management arm is mounted on the right.

\***NOTE:** High Airflow Inserts (High Air Flow Rack Door Insert for the 7142 Rack (single) - PN: 327281-B21; or High Air Flow Rack Door Insert for the 7142 Rack (6-pack) - PN: 327281-B22) are required to support the HP ProLiant DL380 G5 in 7000 series racks. The DL380 G5 Cable Management Arm is not supported on 7000 series racks.

## Telco Rack Support

### DL380 G5 Telco Rack Kit:

Support for all 2-post Telco racks requires the use of the standard rack kit and an additional option kit from Rack Solutions: <http://www.racksolutions.com/hp/>.

---

## Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSA1000, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.

For more information on Factory Express services for your specific server model please contact your sales representative or go to: <http://www.hp.com/go/factory-express>.

---

## HP Enterprise Configurator

The HP eCo-Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact HP's Customer Business Center or an Authorized Partner for assistance.  
<http://www.hp.com/products/configurator>.

---

## Service and Support

HP Care Pack services include coverage for the HP branded hardware options qualified for the server and purchased at the same time or afterward that are internal to the enclosure. This also includes the 22" and smaller external monitors and tower UPS options up to 3kVA. These items will be covered at the same service level and for the same coverage period as the server. Coverage of UPS Battery is not included, and standard warranty terms & conditions apply. For servers or storage systems installed within a rack, service also covers all HP qualified rack options installed within the same rack.

To fully capitalizing on your HP ProLiant servers' capabilities requires a service partner who thoroughly understands your server technology and systems environment. HP Services, an industry leader in provision of multi vender support solutions, provides a range of support services designed to meet the varying needs of your business. Whether an SMB, or large global corporation, HP has a ProLiant server support offer to help you speedily deploy and maximize system uptime.

**Recommended Service** - simplify ProLiant solution implementation, maintenance, and management.

- **Support:** 3-Year 4-Hour response 24x7 Same Business Day Coverage only
- **Deployment Service:** Installation and Start up only

**Enhanced Service** - optimize service level to increase IT performance and availability.

- **Support:** 3-Year Support Plus 24 only

Refer to the information on "Installation & Start-Up" for service on ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet; to be delivered on a scheduled basis 8am-5pm, M-F, excluding HP holidays.

**NOTE:** For a complete listing of service offerings and information visit:

<http://www.hp.com/services/proliantservices>

<http://www.hp.com/go/proliant/carepack>

**NOTE:** High Performance Computing (HPC) interconnect technologies are available for the DL380 under the Cluster Platform product portfolio. These high-speed interconnects are fully supported by HP when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPC Clusters with InfiniBand, Gigabit Ethernet or Myrinet Interconnects:

<http://www.hp.com/techservers/clusters/ucp/index.html>

---

<b>HPC Interconnect</b>	<b>InfiniBand</b>	PCI-X and PCI-Express adapters
	<b>Gigabit Ethernet</b>	Use embedded ports
	<b>Myrinet XP</b>	PCI-X Rev D and Rev E adapters

**NOTE:** For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

<p><b>HP DL380 G5 Performance Models</b></p> <p><b>Quad-Core Models</b>  <b>HP DL380G5 X5460 4G</b>  458561-xx1  <b>HP DL380G5 X5450 4G</b>  458562-xx1  <b>HP DL380G5 E5345 4G</b>  433524-xx1</p> <p><b>Dual-Core Models</b>  <b>HP DL380G5 5160 4G HPM</b>  418315-xx1  <b>HP DL380G5 5150 4G HPM</b>  418314-xx1</p>	<p><b>Processor(s)</b>  Two of the following depending on Model</p> <p><b>Cache Memory</b>  Two of the following depending on Model</p> <p><b>Memory</b></p> <p><b>Network Controller</b></p> <p><b>Storage Controller</b></p> <p><b>Hard Drive</b></p> <p><b>Internal Storage</b></p> <p><b>Optical Drive</b></p> <p><b>Form Factor</b></p> <p><b>Availability</b></p>	<p>(2) Quad-Core Intel® Xeon® X5460 Processors (3.16 GHz, 120 Watt, 1333 FSB)  (2) Quad-Core Intel® Xeon® X5450 Processors (3.00 GHz, 120 Watt, 1333 FSB)  (2) Quad-Core Intel® Xeon® E5345 Processors (2.33 GHz, 80 Watt, 1333 FSB)  (2) Dual-Core Intel® Xeon® 5160 Processors (3.00 GHz, 80 Watt, 1333 FSB)  (2) Dual-Core Intel® Xeon® 5150 Processors (2.66 GHz, 65 Watt, 1333 FSB)</p> <p>12MB (2 x 6MB) Level 2 cache - Intel® Xeon® processor 5400 sequence  8MB (2 x 4MB) Level 2 cache - Intel® Xeon® processor 5300 sequence  6MB (2 x 3MB) Level 2 cache - Intel® Xeon® processor 5200 sequence  4MB (1 x 4MB) Level 2 cache - Intel® Xeon® processor 5100 sequence</p> <p>4 GB (4 x 1 GB of PC2-5300 Fully Buffered DIMMs (DDR2-667) with Advanced ECC, mirrored and online spare memory capabilities</p> <p>Two Embedded NC373i Multifunction Gigabit Server Adapters</p> <p>HP Smart Array P400/512MB BBWC Controller (RAID 0/1/1+0/5/6)</p> <p>None ship standard</p> <p>1.168TB (with optional hard drives)</p> <p>IDE DVD-ROM/CDRW combo</p> <p>Rack (2U), Height 3.38-inch/8.59 cm; Depth: 26 inches (66 cm)</p> <p>Hot Plug Fully Redundant Fans and Power Supplies</p>
--	---	---

<p><b>HP DL380 G5 Base Models</b></p> <p><b>Quad-Core Models</b>  <b>HP DL380G5 E5440 2G</b>  458563-xx1  <b>HP DL380G5 E5430 2G</b>  458565-xx1  <b>HP DL380G5 E5420 2G</b>  458567-xx1  <b>HP DL380G5 E5335 2G</b>  433525-xx1  <b>HP DL380G5 E5320 2G</b>  433526-xx1</p> <p><b>Dual-Core Models</b>  <b>HP DL380RG5 X5260 2G</b>  461453-xx1  <b>HP DL380G5 5160 2G</b>  417458-xx1  <b>HP DL380G5 5150 2G</b>  417457-xx1  <b>HP DL380G5 5140 2G</b>  417456-xx1  <b>HP DL380G5 5130 2G</b>  417455-xx1</p>	<p><b>Processor(s)</b>  One of the following depending on Model</p> <p><b>Cache Memory</b>  One of the following depending on Model</p> <p><b>Memory</b></p> <p><b>Network Controller</b></p> <p><b>Storage Controller</b></p> <p><b>Hard Drive</b></p> <p><b>Internal Storage</b></p> <p><b>Optical Drive</b></p>	<p>(1) Quad-Core Intel® Xeon® Processor E5440 (2.83 GHz, 80 Watts, 1333 FSB)  (1) Quad-Core Intel® Xeon® Processor E5430 (2.66 GHz, 80 Watts, 1333 FSB)  (1) Quad-Core Intel® Xeon® Processor E5420 (2.50 GHz, 80 Watts, 1333 FSB)  (1) Quad-Core Intel® Xeon® Processor E5335 (2.00 GHz, 80 Watts, 1333 FSB)  (1) Quad-Core Intel® Xeon® E5320 Processors (1.86 GHz, 80 Watt, 1066 FSB)  (1) Dual-Core Intel® Xeon® Processor X5260 (3.33 GHz, 80 Watts, 1333 FSB)  (1) Dual-Core Intel® Xeon® 5160 Processors (3.00 GHz, 80 Watt, 1333 FSB)  (1) Dual-Core Intel® Xeon® 5150 Processors (2.66 GHz, 65 Watt, 1333 FSB)  (1) Dual-Core Intel® Xeon® 5140 Processor (2.33 GHz, 65 Watt, 1333 FSB)  (1) Dual-Core Intel® Xeon® 5130 Processor (2.0 GHz, 65 Watt, 1333 FSB)</p> <p>12MB (2 x 6MB) Level 2 cache - Intel® Xeon® processor 5400 sequence  8MB (2 x 4MB) Level 2 cache - Intel® Xeon® processor 5300 sequence  6MB (2 x 3MB) Level 2 cache - Intel® Xeon® processor 5200 sequence  4MB (1 x 4MB) Level 2 cache - Intel® Xeon® processor 5100 sequence  4MB (2 x 2MB) Level 2 cache - Intel® Xeon® processor 5000 sequence</p> <p>2 GB (2 x 1 GB) PC2-5300 Fully Buffered DIMMs (DDR2-667) with Advanced ECC, mirrored and online spare memory capabilities</p> <p>Two Embedded NC373i Multifunction Gigabit Server Adapters</p> <p>HP Smart Array P400/256MB Controller (RAID 0/1/1+0/5)</p> <p>None ship standard</p> <p>1.168TB (with optional hard drives)</p> <p>Optional DVD, DVD/CD-RW combo, DVD+R/RW or floppy drive</p>
--	--	--



**Form Factor**  
**Availability**

Rack (2U), Height 3.38-inch/8.59cm; Depth: 26 inches (66 cm)  
Hot Plug Fully Redundant Fans Standard

**HP DL380 G5 Entry Models**

**Quad-Core Models**  
**DL380G5 E5405 1G**  
458568-xx1

**HP DL380G5 E5310 1G**  
433527-xx1

**Dual-Core Models**

**HP DL380G5 5120 1G**  
417454-xx1

**HP DL380G5 5110 1G**  
417453-xx1

**Processor(s)**  
[One of the following depending on Model](#)

**Cache Memory**  
[Two of the following depending on Model](#)

**Memory**

**Network Controller**

**Storage Controller**

**Hard Drive**

**Internal Storage**

**Optical Drive**

**Form Factor**

**Availability**

(1) Quad-Core Intel® Xeon® E5405 Processor (2.0 GHz, 80 Watt, 1333 FSB)  
(1) Quad-Core Intel® Xeon® E5310 Processor (1.60 GHz, 80 Watt, 1066 FSB)  
(1) Dual-Core Intel® Xeon® 5120 Processor (1.87 GHz, 65 Watt, 1066 FSB)  
(1) Dual-Core Intel® Xeon® 5110 Processor (1.60 GHz, 65 Watt, 1066 FSB)  
12MB (2 x 6MB) Level 2 cache - Intel® Xeon® processor 5400 sequence  
8MB (2 x 4MB) Level 2 cache - Intel® Xeon® processor 5300 sequence  
6MB (2 x 3MB) Level 2 cache - Intel® Xeon® processor 5200 sequence  
4MB (1 x 4MB) Level 2 cache - Intel® Xeon® processor 5100 sequence  
1 GB (2 x 512 MB) PC2-5300 Fully Buffered DIMMs (DDR2-667) with Advanced ECC, mirrored and online spare memory capabilities  
Two Embedded NC373i Multifunction Gigabit Server Adapters  
HP Smart Array E200/64MB Controller (RAID 0/1/1+0)  
None ship standard  
1.168TB (with optional hard drives)  
Optional DVD, DVD/CD-RW combo, DVD+R/RW or floppy drive  
Rack (2U), Height 3.38-inch/8.59cm; Depth: 26 inches (66 cm)  
Hot Plug Fully Redundant Fans Standard

**Country Code Key**

XX=00	U.S.
XX=20	Brazil
XX=29	Japan
XX=37	APD
XX=42	Euro
XX=AA	PRC

**NOTE:** This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for information on CTO product offerings and requirements.

**NOTE:** HP does not allow factory integration of options into standard models listed above. Configure-to-order servers must start with a CTO Chassis.

**NOTE:** This product offering does not support HP Factory Express Server Configuration Level 1.

**NOTE:** FIO indicates that this option only available as a Factory Installable Option.

## Step 1: Base Configuration (choose one of the following configurable models)

<b>Models</b>	HP ProLiant DL380G5 Rack CTO Chassis	391835-B21
	<b>Factory Integrated Model ships with:</b>	
	(8) SFF Serial Attached SCSI (SAS) Drive Bays	
	Two Embedded NC373i Multifunction Gigabit Server Adapters	
	PCI-Express Riser Cage	
	800Watt hot plug power supply, CE Mark Compliant	
	One IEC Power cord	
	Rack (2U), (3.5-inch)	

---

## Step 1A: Choose Controller (must choose only one of the following)

<b>Controllers</b>	HP Smart Array P400/256 for DL380 G5/ DL385 G2 FIO Controller	405160-B21
	<b>NOTE:</b> PCI Express	
	HP Smart Array P400/512 BBWC for DL380 G5/ DL385 G2 FIO Controller	405162-B21
	<b>NOTE:</b> PCI Express	
	HP Smart Array E200/128 BBWC Controller	411508-B21
	<b>NOTE:</b> PCI Express	
	HP Smart Array P800/512 BBWC Controller	381513-B21
	<b>NOTE:</b> PCI Express SA-P800 Controller supports both internal and external drives.	
	HP Smart Array P600/256 BBWC Controller	337972-B21
	<b>NOTE:</b> PCI-X. SA-P600 Controller supports both internal and external drives.	
	HP Smart Array E200/64 FIO Controller	405528-B21
	HP Smart Array 6402/512 FIO Controller	441508-B21
	HP Smart Array 6404/512 FIO CNTRLR	452240-B21

---

## Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

<b>Processors</b>	Quad-Core Intel® Xeon® Processor X5460 (3.16 GHz, 120 Watts, 1333 FSB) DL380 FIO Kit	458581-L21
	Quad-Core Intel® Xeon® Processor X5450 (3.0 GHz, 120 Watts, 1333 FSB) DL380 FIO Kit	462593-L21
	Quad-Core Intel® Xeon® Processor E5450 (3.0 GHz, 80 Watts, 1333 FSB) DL380 FIO Kit	458583-L21
	Quad-Core Intel® Xeon® Processor E5440 (2.83 GHz, 80 Watts, 1333 FSB) DL380 FIO Kit	458585-L21
	Quad-Core Intel® Xeon® Processor E5430 (2.66 GHz, 80 Watts, 1333 FSB) DL380 FIO Kit	458575-L21
	Quad-Core Intel® Xeon® Processor E5420 (2.50 GHz, 80 Watts, 1333 FSB) DL380 FIO Kit	458577-L21
	Quad-Core Intel® Xeon® Processor E5410 (2.33 GHz, 80 Watts, 1333 FSB) DL380 FIO Kit	459142-L21
	Quad-Core Intel® Xeon® Processor E5405 (2.00 GHz, 80 Watts, 1333 FSB) DL380 FIO Kit	458579-L21
	Quad-Core Intel® Xeon® Processor X5365 (3.0 GHz, 120 Watts, 1333 FSB) DL380 FIO Kit	445560-L21
	Quad-Core Intel® Xeon® Processor L5335 (2.0 GHz, 50 Watts, 1333 FSB) DL380 FIO Kit	452640-L21

Quad-Core Intel® Xeon® Processor X5355 (2.66 GHz , 120 Watts, 1333 FSB) DL380 G5 FIO Kit	437939-L21
Quad-Core Intel® Xeon® Processor E5345 (2.33 GHz, 80 Watts, 1333 FSB) DL380 G5 FIO Kit	437940-L21
Quad-Core Intel® Xeon® Processor E5335 (2.00 GHz, 80 Watts, 1333 FSB) DL380 G5 FIO Kit	437941-L21
Quad-Core Intel® Xeon® Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB) DL380 G5 FIO Kit	433522-L21
Quad-Core Intel® Xeon® Processor L5320 (1.86 GHz, 50 Watts, 1066 FSB) DL380 G5 FIO Kit	435934-L21
Quad-Core Intel® Xeon® Processor E5310 (1.60 GHz, 80 Watts, 1066 FSB) DL380 G5 FIO Kit	437943-L21
Dual-Core Intel® Xeon® Processor X5260 (3.33 GHz, 80 Watts, 1333 FSB) DL380 FIO Kit	461461-L21
Dual-Core Intel® Xeon® Processor E5205 (1.86 GHz, 65 Watts, 1066 FSB) DL380 FIO Kit	461465-L21
Dual-Core Intel® Xeon® Processor 5160 (3.0 GHz, 80 Watts, 1333 FSB) DL380 G5 FIO Kit	418324-L21
Dual-Core Intel® Xeon® Processor 5150 (2.66 GHz, 65 Watts, 1333 FSB) DL380 G5 FIO Kit	418323-L21
Dual-Core Intel® Xeon® Processor 5148 (2.33 GHz, 40 Watts, 1333 FSB, Low Voltage) DL380 G5 FIO Kit	432333-L21
Dual-Core Intel® Xeon® Processor 5140 (2.33 GHz, 65 Watts, 1333 FSB) DL380 G5 FIO Kit	418322-L21
Dual-Core Intel® Xeon® Processor 5130 (2.0 GHz, 65 Watts, 1333 FSB) DL380 G5 FIO Kit	418321-L21
Dual-Core Intel® Xeon® Processor 5120 (1.86 GHz, 65 Watts, 1066 FSB) DL380 G5 FIO Kit	418320-L21
Dual-Core Intel® Xeon® Processor 5110 (1.6 GHz, 65 Watts, 1066 FSB) DL380 G5 FIO Kit	418319-L21

#### Base Memory

1 GB FBD PC2-5300 2 x 512 MB Kit	397409-B21
2 GB FBD PC2-5300 2 x 1 GB Kit	397411-B21
2 GB FBD PC2-5300 2 x 1 GB LP Kit	461826-B21
4 GB FBD PC2-5300 2 x 2 GB Kit	397413-B21
4 GB FBD PC2-5300 2 x 2 GB LP Kit	461828-B21
8 GB FBD PC2-5300 2 x 4 GB Kit	397415-B21
8 GB FBD PC2-5300 2 x 4 GB LP Kit	466440-B21

**NOTE:** Memory Option Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, please visit: <http://h18004.www1.hp.com/products/servers/platforms/energyefficient/>

### Step 3: Choose Additional Factory Integratable Options

**Performance Packs** The HP ProLiant DL380 G5 performance packs are necessary to configure a HP ProLiant DL380 G5 Performance Model. HP ProLiant DL380 G5 Performance model includes the latest performance technologies and enterprise class availability features pre-installed for convenience and value. The performance pack includes a 2nd processor and a redundant power supply.

**NOTE:** Must also select Slimline CD-RW/DVD-ROM Combo Option Kit (331903-B21) to achieve parity to DL380 G5 High Performance Models.

HP DL380G5 X5460 HPM FIO Perf Pack	458588-B21
HP DL380G5 X5450 HPM FIO Perf Pack	458589-B21
HP DL380G5 E5345 HPM FIO Perf Pack	433559-B21
HP DL380G5 X5160 HPM FIO Perf Pack	419812-B21
HP DL380G5 X5150 HPM FIO Perf Pack	419811-B21

### Step 4: Choose Additional Options for Factory Integration

**NOTE:** For additional options, please refer to the "Options" section below.



**NOTE:** Some options may not be integrated at the factory. Contact your local sales representative for additional information.

**HP ProLiant DL380 G5 Mixed Riser Cage Option Kit (PCI-E/PCI-X)  
Unique Options**

410570-B21

**HP Insight Control  
Management Suites**

**NOTE:** Electronic licensing options are available for Insight Control suites software products. Please see the appropriate Insight Control QuickSpecs for additional information.

**HP Insight Control Environment**

HP Insight Control Environment, No Media 1-Server License including 1 year of 24x7 Technical Support and Updates

452148-B22

**NOTE:** This part number can be purchased as a single license or as multiple licenses with a single activation key. Customer will receive a license entitlement certificate via e-mail. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service. Only available directly from HP and select resellers in the Americas region.

HP Insight Control Management Software Media Kit

436222-B21

**NOTE:** Insight Control Management DVD media without licenses. Contains Insight Manager and Essentials software products and components licensed by Insight Control Management suites. Uses an integrated installer to perform quick and accurate software installation and updates.

**NOTE:** For additional License Kits, please see the QuickSpecs at:

[http://h18000.www1.hp.com/products/quickspecs/12631\\_div/12631\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html)

**Integrated Lights-Out Power Management Pack**

HP iLO Power Management Pack, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates

452145-B21

**NOTE:** This option kit includes 1 license for iLO Advanced and Insight Power Manager.

**NOTE:** For additional License Kits, please see the QuickSpecs at:

[http://h18000.www1.hp.com/products/quickspecs/12632\\_div/12632\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12632_div/12632_div.html)

**Server Management  
Stand Alone Software**

**NOTE:** Electronic licensing options are available for select ProLiant Essentials software products. Please see the appropriate ProLiant Essentials QuickSpecs for additional information.

**Deploy**

**ProLiant Essentials Rapid Deployment Pack**

ProLiant Essentials Rapid Deployment Pack No Media 1-Server License including 1 year of 24x7 Technical Support and Updates

452151-B21

**NOTE:** This license allows 1 server to be deployed and managed via RDP. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service

**NOTE:** For additional License Kits, please see the QuickSpecs at:

[http://h18000.www1.hp.com/products/quickspecs/11053\\_div/11053\\_div.html](http://h18000.www1.hp.com/products/quickspecs/11053_div/11053_div.html)

**HP Server Migration Pack - Universal Edition**

HP Server Migration Pack - Universal Edition, No Media, Physical / Virtual to ProLiant Single Migration License, including 1 year of 24x7 Technical Support and Updates

460750-B21

**NOTE:** This license allows 1 physical to ProLiant or virtual to ProLiant migration. Customer will receive a printed license entitlement certificate and documentation via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

HP Server Migration Pack - Universal Edition, No Media, Physical / Virtual to Virtual Single Migration License, including 1 year of 24x7 Technical Support and Updates

460753-B21

**NOTE:** This license allows 1 physical to virtual or virtual to virtual migration.



Customer will receive a printed license entitlement certificate and documentation via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

HP Server Migration Pack - Universal Edition, No Media, 1-Year Unlimited Migration License, including 1 year of 24x7 Technical Support 460756-B21

**NOTE:** This license allows unlimited migrations (physical to ProLiant, physical to virtual, virtual to virtual, and virtual to ProLiant) for one year. Customer will receive a printed license entitlement certificate and documentation via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support Service.

**NOTE:** For additional License Kits, please see the QuickSpecs at: [http://h18000.www1.hp.com/products/quickspecs/12855\\_div/12855\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12855_div/12855_div.html)

#### Control

##### Integrated Lights-Out Select Pack

ProLiant Essentials Integrated Lights-Out Select Pack, No Media, 1-Server License 452158-B21

**NOTE:** For additional License Kits, please see the QuickSpecs at: [http://h18000.www1.hp.com/products/quickspecs/12362\\_div/12362\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12362_div/12362_div.html)

##### Integrated Lights-Out Advanced Pack

Integrated Lights-Out Advanced Pack, No Media, 1 Server License 452141-B21

**NOTE:** For additional License Kits, please see the QuickSpecs at: [http://h18000.www1.hp.com/products/quickspecs/10861\\_div/10861\\_div.html](http://h18000.www1.hp.com/products/quickspecs/10861_div/10861_div.html)

#### Optimize

##### Accelerated iSCSI Pack

ProLiant Essentials Accelerated iSCSI Pack, No Media, Single License 452679-B21

**NOTE:** For use with a single NIC port. Contains one license with a unique license activation key and documentation.

**NOTE:** For additional License Kits, please see the QuickSpecs at: [http://h18000.www1.hp.com/products/quickspecs/12466\\_div/12466\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12466_div/12466_div.html)

##### HP Insight Power Manager (IPM)

HP Insight Power Manager, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates 452677-B21

**NOTE:** Customers purchasing this upgrade must already have an iLO Advanced or Select license on each managed server. Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

**NOTE:** For additional License Kits, please see the QuickSpecs at: [http://h18000.www1.hp.com/products/quickspecs/12623\\_div/12623\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12623_div/12623_div.html)

##### ProLiant Essentials Virtual Machine Management Pack

ProLiant Essentials Virtual Machine Management Pack, No Media, 1-Server License, including 1 year of 24x7 Technical Support and Updates 452153-B21

**NOTE:** Customer will receive a printed license entitlement certificate via physical shipment. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.

**NOTE:** For additional License Kits, please see the QuickSpecs at: [http://h18000.www1.hp.com/products/quickspecs/12328\\_div/12328\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12328_div/12328_div.html)

##### RDMA Pack

RDMA Pack for Embedded Multifunction Gigabit Server Adapters, No Media, 1-Server License 452681-B21

**NOTE:** For additional License Kits, please see the QuickSpecs at: [http://h18000.www1.hp.com/products/quickspecs/12573\\_div/12573\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12573_div/12573_div.html)

**NOTE:** Flexible and volume quantity license kits are available for ProLiant Essentials Value Packs. Refer to: <http://www.hp.com/servers/proliantessentials> or the various ProLiant Essentials QuickSpecs for more information.

**NOTE:** Please see the SmartStart QuickSpecs for additional information regarding the subscription purchase:  
<http://h18000.www1.hp.com/products/quickspecs/division/11073.html>  
(Worldwide)

<b>Processors</b>	Quad-Core Intel® Xeon® Processor X5460 (3.16 GHz, 120 Watts, 1333 FSB)	458581-B21
	Quad-Core Intel® Xeon® Processor X5450 (3.0 GHz, 120 Watts, 1333 FSB)	462593-B21
	Quad-Core Intel® Xeon® Processor E5450 (3.0 GHz, 80 Watts, 1333 FSB)	458583-B21
	Quad-Core Intel® Xeon® Processor E5440 (2.83 GHz, 80 Watts, 1333 FSB)	458585-B21
	Quad-Core Intel® Xeon® Processor E5430 (2.66 GHz, 80 Watts, 1333 FSB)	458575-B21
	Quad-Core Intel® Xeon® Processor E5420 (2.50 GHz, 80 Watts, 1333 FSB)	458577-B21
	Quad-Core Intel® Xeon® Processor E5410 (2.33 GHz, 80 Watts, 1333 FSB)	459142-B21
	Quad-Core Intel® Xeon® Processor E5405 (2.00 GHz, 80 Watts, 1333 FSB)	458579-B21
	Quad-Core Intel® Xeon® Processor X5365 (3.00GHz , 120 Watts, 1333 FSB)	445560-B21
	Quad-Core Intel® Xeon® Processor L5335 (2.0 GHz, 50 Watts, 1333 FSB)	452640-B21
	Quad-Core Intel® Xeon® Processor X5355 (2.66 GHz, 120 Watts, 1333 FSB)	437939-B21
	Quad-Core Intel® Xeon® Processor E5345 (2.33 GHz, 80 Watts, 1333 FSB)	437940-B21
	Quad-Core Intel® Xeon® Processor E5335 (2.00 GHz, 80 Watts, 1333 FSB)	437941-B21
	Quad-Core Intel® Xeon® Processor E5320 (1.86 GHz, 80 Watts, 1066 FSB)	433522-B21
	Quad-Core Intel® Xeon® Processor L5320 (1.86 GHz, 50 Watts, 1066 FSB)	435934-B21
	Quad-Core Intel® Xeon® Processor E5310 (1.60 GHz, 80 Watts, 1066 FSB)	437943-B21
	Dual-Core Intel® Xeon® Processor X5260 (3.33 GHz, 80 Watts, 1333 FSB)	461461-B21
	Dual-Core Intel® Xeon® Processor E5205 (1.86 GHz, 65 Watts, 1066 FSB)	461465-B21
	Dual-Core Intel® Xeon® Processor 5160 (3.0 GHz, 80 Watts, 1333 FSB)	418324-B21
	Dual-Core Intel® Xeon® Processor 5150 (2.66 GHz, 65 Watts, 1333 FSB)	418323-B21
	Dual-Core Intel® Xeon® Processor 5148 (2.33 GHz, 40 Watts, 1333 FSB, Low Voltage)	432333-B21
	Dual-Core Intel® Xeon® Processor 5140 (2.33 GHz, 65 Watts, 1333 FSB)	418322-B21
	Dual-Core Intel® Xeon® Processor 5130 (2.0 GHz, 65 Watts, 1333 FSB)	418321-B21
	Dual-Core Intel® Xeon® Processor 5120 (1.86 GHz, 65 Watts, 1066 FSB)	418320-B21
	Dual-Core Intel® Xeon® Processor 5110 (1.6 GHz, 65 Watts, 1066 FSB)	418319-B21

<b>Memory (DIMMs)</b>	1 GB FBD PC2-5300 2 x 512 MB Kit	397409-B21
	2 GB FBD PC2-5300 2 x 1 GB Kit	397411-B21
	2 GB FBD PC2-5300 2 x 1 GB LP Kit	461826-B21
	4 GB FBD PC2-5300 2 x 2 GB Kit	397413-B21
	4 GB FBD PC2-5300 2 x 2 GB LP Kit	461828-B21
	8 GB FBD PC2-5300 2 x 4 GB Kit	397415-B21
	8 GB FBD PC2-5300 2 x 4 GB LP Kit	466440-B21

**NOTE:** Memory Option Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, please visit:  
<http://h18004.www1.hp.com/products/servers/platforms/energyefficient/>

<b>Diskette Drive</b>	Slimline Ejectable Floppy drive	390164-B21
-----------------------	---------------------------------	------------

<b>Optical Drives</b>	Slimline CD-RW/DVD-ROM Combo Option Kit	331903-B21
	<b>NOTE:</b> Included in performance models.	
	Slimline DVD-ROM Drive (8x/24x) Option Kit	264007-B21
	HP DVD±R/RW 8X Slim	383975-B21
	Slimline CD-ROM Drive 24X	356963-B21

## Hard Drives

### Hot Plug SFF SAS 2.5" Drives

HP 146GB 3G SAS 10K SFF DP HDD	418367-B21
HP 146GB 3G SAS 10K SFF SP HDD	431958-B21
HP 72GB 3G SAS 15K SFF DP HDD	418371-B21
HP 72GB 3G SAS 15K SFF SP HDD	431935-B21
HP 72GB 3G SAS 10K SFF DP HDD	384842-B21
HP 72GB 3G SAS 10K SFF SP HDD	375861-B21
HP 36GB 3G SAS 15K SFF DP HDD	418369-B21
HP 36GB 3G SAS 15K SFF SP HDD	431933-B21

**NOTE:** Please see the [SAS Hard Drive QuickSpecs for Technical Specifications](#) such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature:

[http://h18000.www1.hp.com/products/quickspecs/12244\\_div/12244\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html)  
(Worldwide)

### SFF SATA Hot Plug

HP 120GB 1.5G SATA 5.4K SFF HDD	431786-B21
HP 60GB 1.5G SATA 5.4K SFF HDD	379306-B21

**NOTE:** SATA drives have a 1 year warranty. Please see the [SATA Hard Drive QuickSpecs for Technical Specifications](#) such as capacity, height, width, interface, transfer rate, seek time, physical configuration, and operating temperature:

[http://h18000.www1.hp.com/products/quickspecs/11940\\_div/11940\\_div.html](http://h18000.www1.hp.com/products/quickspecs/11940_div/11940_div.html)  
(Worldwide)

## Storage Controllers

### SAS Controllers

#### Smart Array E200 Controller

HP Smart Array E200/128 BBWC Controller	411508-B21
128-MB BBWC (Battery-Backed Write Cache) Enabler	351580-B21

**NOTE:** Supports the Smart Array E200 Controller, Smart Array 641 Controller, and Smart Array 642 Controller.

#### Smart Array E500 Controller

Smart Array E500/256MB Controller	435129-B21
-----------------------------------	------------

#### Smart Array P400 Controller

HP Smart Array P400/256MB Controller	405132-B21
HP Smart Array P400/512MB BBWC Controller	411064-B21
512MB Battery-backed cache upgrade	405148-B21

**NOTE:** Contains batter and memory module. For Smart Array P400 Controller.

Battery-backed write cache upgrade	383280-B21
------------------------------------	------------

**NOTE:** Contains battery only. For Smart Array P400 Controller.

Smart Array P400 Battery Attach Kit	417836-B21
-------------------------------------	------------

**NOTE:** This option kit contains a 24" battery cable and adhesive material for installing a battery into the HP ProLiant DL380 G5 if a Smart Array P400 is integrated outside of the factory. For all solutions, please refer to the server QuickSpecs and User's Manual for detailed installation instructions.

#### Smart Array P600 Controller

HP Smart Array P600/256 BBWC Controller	337972-B21
---	------------

**NOTE:** Requires Mixed PCI-E/X riser cage.

512 MB Battery-Backed Cache Upgrade	372538-B21
-------------------------------------	------------

**NOTE:** This 512-MB Battery-Backed Cache Module upgrade kit supports the Smart Array P600 Controller and the Smart Array 6400 series Controller.

#### Smart Array P800 Controller

HP Smart Array P800/512 BBWC Controller	381513-B21
---	------------

**NOTE:** Please see the following QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/12460\\_div/12460\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12460_div/12460_div.html)  
(Smart Array E200 Controller)

[http://h18000.www1.hp.com/products/quickspecs/12700\\_div/12700\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12700_div/12700_div.html)  
(Smart Array E500 Controller)



[http://h18000.www1.hp.com/products/quickspecs/12400\\_div/12400\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12400_div/12400_div.html)  
 (Smart Array P400 Controller)  
[http://h18000.www1.hp.com/products/quickspecs/12247\\_div/12247\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12247_div/12247_div.html)  
 (Smart Array P600 Controller)  
[http://h18000.www1.hp.com/products/quickspecs/12616\\_div/12616\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12616_div/12616_div.html)  
 (Smart Array P800 Controller)

### SAS HBA

HP SC44Ge Host Bus Adapter 416096-B21  
 HP 8 Internal Port SAS HBA with RAID 347786-B21

**NOTE:** Please see the following QuickSpecs for additional information:  
[http://h18004.www1.hp.com/products/quickspecs/12617\\_div/12617\\_div.html](http://h18004.www1.hp.com/products/quickspecs/12617_div/12617_div.html)  
 (SC44Ge HBA)  
[http://h18004.www1.hp.com/products/quickspecs/12332\\_div/12332\\_div.html](http://h18004.www1.hp.com/products/quickspecs/12332_div/12332_div.html)  
 (SAS HBA)

### SCSI Controllers for External Drive/Storage Support

**NOTE:** All Ultra 320 controllers are PCI-X and require the Mixed Riser Cage Option Kit (PCI-E/PCI-X).

Smart Array 6402/128 Controller 273915-B21

**NOTE:** Ultra320 SCSI.

Smart Array 6404/256 Controller 273914-B21

**NOTE:** Ultra320 SCSI.

Smart Array 642 Controller 291967-B21

**NOTE:** Ultra320 SCSI.

128-MB Battery-Backed Write Cache (BBWC) 351580-B21

**NOTE:** Supports the Smart Array E200 Controller, Smart Array 641 Controller, and Smart Array 642 Controller.

Ultra320 Expansion Module for SA-6402 273911-B21

64-Bit/133-MHz Single Channel Ultra320 SCSI HBA G2 374654-B21

### SCSI HBA

HP SC11Xe Host Bus Adapter 412911-B21

**NOTE:** Please see the following QuickSpecs for Technical Specifications and additional information:

[http://h18000.www1.hp.com/products/quickspecs/11943\\_div/11943\\_div.html](http://h18000.www1.hp.com/products/quickspecs/11943_div/11943_div.html)  
 (Single Channel Ultra320 SCSI HBA)

[http://h18000.www1.hp.com/products/quickspecs/11587\\_div/11587\\_div.html](http://h18000.www1.hp.com/products/quickspecs/11587_div/11587_div.html)  
 (Smart Array 6400 Series)

[http://h18000.www1.hp.com/products/quickspecs/12069\\_div/12069\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12069_div/12069_div.html)  
 (Smart Array 642)

[http://h18000.www1.hp.com/products/quickspecs/12566\\_div/12566\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.html)  
 (SC11Xe HBA)

## Communications

HP NC110T PCI Express Gigabit Server Adapter 434905-B21

**NOTE:** Does not support Windows 2000.

HP NC360T PCI Express Dual Port Gigabit Server Adapter 412648-B21

HP NC364T PCI Express Quad Port Gigabit Server Adapter 435508-B21

**NOTE:** Does not support Windows 2000.

HP NC373F PCI Express Multifunction Gigabit Server Adapter 394793-B21

HP NC373T PCI Express Multifunction Gigabit Server Adapter 394791-B21

HP NC380T PCI Express Dual Port Multifunction Gigabit Server Adapter 394795-B21

HP NC510F PCIe 10 Gigabit Server Adapter 414126-B21

**NOTE:** A minimum of 1 gigabyte (1 GB) of server memory is required per each NC510F adapter.

HP NC510C PCIe 10 Gigabit Server Adapter 414129-B21

**NOTE:** A minimum of 1 gigabyte (1 GB) of server memory is required per each NC510C adapter.

HP NC7170 PCI-X Dual Port 1000T Gigabit Server Adapter 313881-B21

<b>HPC Specific Options</b>	HP IB 4X DDR PCI-e Dual Port HCA	409376-B21
	HP IB 4X DDR PCI-e single PORT HCA	431039-B21
	HP IB 4X SDR PCI-e single PORT HCA	431038-B21
	HP IB 4X DDR Conn-X PCI-e Dual Port HCA	448397-B21
<b>Redundant Options</b>	Redundant Power Supply 350/370/380 G5 AU Kit	399771-011
	Redundant Power Supply 350/370/380 G5 EU Kit	399771-021
	Redundant Power Supply 350/370/380 G5 JP Kit	399771-291
	Redundant Power Supply 350/370/380 G5 Worldwide Kit	399771-B21
	Redundant Power Supply 350/370/380 G5 UK Kit	399771-031
	Redundant Power Supply 350/370/380 G5 US Kit	399771-001
	Redundant Power Supply 380 G5 Worldwide Kit - 48Volt DC	433634-B21
	<b>NOTE:</b> Factory integration not available for PN 433634-B21.	
<b>Power Cords</b>	Nema 5-15P to IEC320-C13, North America low voltage (6 ft/2 m)	AF556A
	Power Cord, Euro, 10A 250V Straight (6 ft/2 m)	AF568A
	Power Cord, UK/HK/SING, 10A 250V Straight (6 ft/2 m)	AF570A
	Power Cord, Danish, 10A 250V Straight (6 ft/2 m)	AF566A
	Power Cord, Swiss, 10A 250V Straight (6 ft/2 m)	AF565A
	Power Cord, Italian/Chile, 10A 250V Straight (6 ft/2 m)	AF571A
	Power Cord, South Africa, 10A 250V Straight (8 ft/2.5 m)	AF567A
<b>Tape Drives</b>	<b>NOTE:</b> For the complete listing of Tape Drive offerings, please see: <a href="http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html">http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html</a>	
	For recommended tape drive offerings for this ProLiant server see the following:	
	<b>USB Tape Drives</b>	
	HP StorageWorks 1U USB Rack-Mount Kit with one DAT 160 USB Tape Drive	AG703A
	<b>SAS Tape Drives</b>	
	<b>NOTE:</b> For the DL380 G5, HP recommends purchasing the HP SC44Ge HBA (416096-B21) for a dedicated SAS HBA for tape.	
	HP StorageWorks DAT 160 SAS Internal Tape Drive	Q1587A
	<b>NOTE:</b> HP recommends combining this tape drive with the 1U SAS Rack-Mount kit (AE459A) for a complete rack-mount solution.	
	HP StorageWorks LTO-2 Ultrium 448 SAS Internal Tape Drive	DW085A
	<b>NOTE:</b> HP recommends combining this tape drive with the 1U SAS Rack-Mount kit (AE459A) for a complete rack-mount solution.	
	HP StorageWorks LTO-3 Ultrium 920 SAS Internal Tape Drive	EH847A
	<b>NOTE:</b> HP recommends combining this tape drive with the 1U SAS Rack-Mount kit (AE459A) for a complete rack-mount solution.	
	HP StorageWorks 1U SAS Rack-mount kit with one LTO-4 Ultrium 1760	EH946A
<b>NOTE:</b> Please refer to the "Tape Drives, Tape Autoloaders & Tape Libraries" table in the Storage section of this document for a list of SAS controllers with tape support.		
<b>SCSI Tape Drives</b>		
<b>NOTE:</b> For the DL380 G5, HP recommends purchasing the HP SC11Xe HBA (412911-B21) for a dedicated SCSI HBA for tape.		
HP StorageWorks LTO-1 Ultrium 232 Internal Tape Drive (Carbonite)	DW064A	
<b>NOTE:</b> HP recommends combining this tape drive with the 1U SCSI Rack-Mount kit (A7445B) for a complete rack-mount solution.		
HP StorageWorks 1U SCSI Rack-mount kit with one LTO-2 Ultrium 448 SCSI Tape Drive (Carbonite)	DW028B	
HP StorageWorks 1U SCSI Rack-mount kit with one LTO-3 Ultrium 920	EH903A	
<b>NOTE:</b> Please see the HP StorageWorks Ultrium Tape Drive QuickSpecs for additional options such as controllers, media, and other related items: <a href="http://h18006.www1.hp.com/products/quickspecs/11739_div/11739_div.html">http://h18006.www1.hp.com/products/quickspecs/11739_div/11739_div.html</a>		

(Worldwide)

[http://h18006.www1.hp.com/products/quickspecs/12128\\_div/12128\\_div.html](http://h18006.www1.hp.com/products/quickspecs/12128_div/12128_div.html)

(Worldwide)

For an up-to-date listing of the latest O/S and software support details for HP Ultrium tape drives, please visit: <http://www.hp.com/go/connect>.

### Rack-Mount Tape Drive Enclosures

HP StorageWorks 1U SCSI Rack-Mount kit A7445B

**NOTE:** The 1U Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with multiple Single-Ended and LVD SCSI tape drives including the DAT 40, DAT 72, DAT 160, DLT VS160, LTO-1 Ultrium 232, LTO-2 Ultrium 448 and LTO-3 Ultrium 920 tape drives.

HP StorageWorks 1U USB Rack-Mount Kit A8007A

**NOTE:** The 1U USB Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with the DAT 40 USB, DAT 72 USB and DAT 160 tape drives.

HP StorageWorks 1U SAS Rack-Mount Kit AE459A

**NOTE:** The 1U SAS Rack-Mount Kit can support up to (2) half-height tape drives and is compatible with the LTO-2 Ultrium 448 SAS, LTO-3 Ultrium 920 SAS tape drives.

**NOTE:** Please see the Rack-Mount Tape Drive Kits QuickSpecs for additional information regarding these kits:

[http://h18000.www1.hp.com/products/quickspecs/10854\\_div/10854\\_div.html](http://h18000.www1.hp.com/products/quickspecs/10854_div/10854_div.html)

(Worldwide)

---

### HP D2D Backup System

HP StorageWorks D2D110 Backup System EH880A

**NOTE:** 1TB of Disk Storage.

HP StorageWorks D2D110 Backup System with Data Protector Express EH923A

Software Kit

**NOTE:** 1TB of Disk Storage.

HP StorageWorks D2D120 Backup System EH884A

**NOTE:** 2TB of Disk Storage.

HP StorageWorks D2D120 Backup System with Data Protector Express EH924A

Software Kit

**NOTE:** 2TB of Disk Storage.

HP StorageWorks D2D130 Backup System EH950A

**NOTE:** 3TB of Disk Storage.

HP StorageWorks D2D130 Backup System with Data Protector Express EH951A

Software Kit

**NOTE:** 3TB of Disk Storage.

HP StorageWorks D2D130 Backup System with LTO-3 Ultrium 920 SAS Tape EH952A

Drive

**NOTE:** 3TB of Disk Storage.

**NOTE:** Please see the HP D2D Backup Systems QuickSpecs for additional information:

[http://h18000.www1.hp.com/products/quickspecs/12651\\_div/12651\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12651_div/12651_div.html)

(Worldwide)

## Tape Autoloaders

### HP StorageWorks DAT Autoloader

HP StorageWorks DAT 72x10 tape autoloader AE313B

### HP StorageWorks 1/8 Tape Autoloader

HP StorageWorks 1/8 G2 LTO-4 Ultrium 1760 SAS Tape Autoloader AK377A

HP StorageWorks 1/8 LTO-3 Ultrium 920 G2 Tape Autoloader AH165A

HP StorageWorks 1/8 G2 LTO-3 Ultrium 920 SAS Autoloader AH558A

HP StorageWorks 1/8 LTO-2 Ultrium 448 G2 Tape Autoloader AH164A

HP StorageWorks 1/8 LTO-1 Ultrium 232 G2 Tape Autoloader AH163A

HP StorageWorks 1/8 G2 Tape Autoloader Rack Kit AH166A

**NOTE:** Required to install the 1/8 G2 Autoloaders in a standard 19-inch rack; includes rails and rackmount instructions.

**NOTE:** Please reference the Tape Autoloader QuickSpecs at: <http://www.hp.com/go/automation> for additional information needed to create a complete solution; reference current compatibility information at: <http://www.hp.com/go/ebs>.

## Tape Libraries

### HP StorageWorks MSL2024 Tape Library

HP StorageWorks MSL2024 1 LTO-4 Ultrium 1840 SCSI Drive Library AJ033A

HP StorageWorks MSL2024 1 LTO-4 Ultrium 1840 4GB FC Library AJ034A

HP StorageWorks MSL2024 1 LTO-4 Ultrium 1760 SAS Drive Library AK378A

HP StorageWorks MSL2024 1 LTO-3 Ultrium 960 SCSI Drive Library AG115A

HP StorageWorks MSL2024 1 LTO-3 Ultrium 960 4GB FC Library AG326B

HP StorageWorks MSL2024 1 LTO-3 Ultrium 920 SAS Drive Library AH559A

HP StorageWorks MSL2024 1 LTO-3 Ultrium 920 SCSI Drive Library AH169A

HP StorageWorks MSL2024 1 LTO-2 Ultrium 448 SCSI Drive Library AG116A

### HP StorageWorks MSL4048 Tape Library

HP StorageWorks MSL4048 1 LTO-4 Ultrium 1840 SCSI Drive Library AJ035A

HP StorageWorks MSL4048 1 LTO-4 Ultrium 1840 4GB FC Library AJ036A

HP StorageWorks MSL4048 2 LTO-4 Ultrium 1760 SAS Drive Library AK380A

HP StorageWorks MSL4048 1 LTO-3 Ultrium 960 SCSI Drive Library AG322A

HP StorageWorks MSL4048 1 LTO-3 Ultrium 960 4GB FC Library AG324B

HP StorageWorks MSL4048 1 LTO-3 Ultrium 920 SAS Drive Library AH560A

HP StorageWorks MSL4048 1 LTO-3 Ultrium 920 SCSI Drive Library AH171A

HP StorageWorks MSL4048 1 LTO-2 Ultrium 448 SCSI Drive Library AG320A

### HP StorageWorks MSL8096 Tape Library

HP StorageWorks MSL8096 2 LTO-4 Ultrium 1840 SCSI Drive Library AJ039A

HP StorageWorks MSL8096 2 LTO-4 Ultrium 1840 4GB FC Library AJ040A

HP StorageWorks MSL8096 2 LTO-4 Ultrium 1760 SAS Drive Library AK382A

HP StorageWorks MSL8096 2 LTO-3 Ultrium 920 SAS Drive Library AH561A

HP StorageWorks MSL8096 2 LTO-3 Ultrium 960 4GB FC Library AH218A

HP StorageWorks MSL8096 2 LTO-3 Ultrium 960 Drive Library AH219A

### HP StorageWorks MSL6000 Tape Library

#### LTO-4 Ultrium 1840 technology

HP StorageWorks MSL6030 1 LTO-4 Ultrium 1840 SCSI Drive Library AJ029A

HP StorageWorks MSL6030 1 LTO-4 Ultrium 1840 4GB FC Library AJ030A

HP StorageWorks MSL6060 2 LTO-4 Ultrium 1840 SCSI Drive Library AJ031A

HP StorageWorks MSL6060 2 LTO-4 Ultrium 1840 4GB FC Library AJ032A

#### LTO-3 Ultrium 960 technology

HP StorageWorks MSL6030 1 Ultrium 960 Dr LVDS Library AD606B

HP StorageWorks MSL6030 1 Ultrium 960 Dr FC Library AD608B

HP StorageWorks MSL6030 2 Ultrium 960 Dr LVDS Library AD607B

HP StorageWorks MSL6030 2 Ultrium 960 Dr FC Library AD609B

**NOTE:** Please reference the MSL2024, MSL4048, MSL8096 and MSL6000 Tape Library QuickSpecs at: <http://www.hp.com/go/automation> for additional information needed to create a complete solution; reference current compatibility information at: <http://www.hp.com/go/ebs>.

<b>Cluster Options</b>	ProLiant Cluster Starter Kit	364023-B22
	<b>NOTE:</b> For additional information regarding the ProLiant Cluster Starter Kit please see the following QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/11935_div/11935_div.html">http://h18000.www1.hp.com/products/quickspecs/11935_div/11935_div.html</a> (Worldwide)	
	HP Serviceguard for Linux, A.11.18 (single license version - Red Hat EL 4&5, SUSE SLES 9&10)	305199-B27
	HP Serviceguard for Linux, A.11.18 (single license version - Red Hat EL 4&5, SUSE SLES10)	307754-B27
	HP Serviceguard for Linux and Red Hat Global File System - 1 year subscription	T2798AA#001
	HP Serviceguard for Linux and Red Hat Global File System - 3 years subscription	T2798AA#003
	<b>NOTE:</b> For additional information regarding HP Serviceguard for Linux, please see the following QuickSpecs at: <a href="http://h18000.www1.hp.com/products/quickspecs/11518_div/11518_div.html">http://h18000.www1.hp.com/products/quickspecs/11518_div/11518_div.html</a> (Worldwide)	
	<b>NOTE:</b> For configuration/certification options for HP Serviceguard for Linux please go to: <a href="http://www.hp.com/info/sglx">http://www.hp.com/info/sglx</a>	

**StorageWorks Options StorageWorks Fibre Channel HBA**

**NOTE:** For the complete listing of Fibre Channel Host Bus Adapters for Windows 2000, Windows Server 2003 and Linux, please see:  
<http://h18006.www1.hp.com/storage/saninfrastructure/hba.html>

HP StorageWorks FC2142SR 4Gb PCI-e HBA	A8002A
HP StorageWorks FC2242SR Dual Channel 4 Gb PCI-e HBA	A8003A
HP StorageWorks FC1142SR 4Gb PCI-e HBA	AE311A
HP StorageWorks FC1242SR Dual Channel 4 Gb PCI-e HBA	AE312A
HP StorageWorks FC2143 4Gb PCI-X 2.0 -to-Fibre Channel HBA	AD167A
HP StorageWorks FC2243 Dual Channel 4Gb PCI-X 2.0 HBA	AD168A
HP StorageWorks FC1143 4Gb PCI-X 2.0 HBA	AB429A
HP StorageWorks FC1243 Dual Channel 4Gb PCI-X 2.0 HBA	AE369A
HP StorageWorks 81Q PCI-e FC HBA	AK344A

**StorageWorks SCSI HBA**

HP U320e SCSI Host Bus Adapter	AH627A
<b>NOTE:</b> Recommended Dual Channel Ultra320 SCSI Controller for connecting multi-drive MSL tape libraries to ProLiant servers.	

<b>HP StorageWorks Modular Smart Array 20</b>	HP StorageWorks Modular Smart Array 20	335921-B21
	<b>NOTE:</b> Rack-mountable 12 (SATA) drive enclosure with U320 Host connectivity, redundant power supplies.	
	<b>NOTE:</b> Please see the Modular Smart Array 20 QuickSpecs for additional information including configuration steps and additional options needed for a complete solution at: <a href="http://h18000.www1.hp.com/products/quickspecs/11942_div/11942_div.html">http://h18000.www1.hp.com/products/quickspecs/11942_div/11942_div.html</a> (Worldwide)	



<b>Uninterruptible Power Systems - Rack</b>	HP R1.5 VA 1U UPS INTL	AF418A
	HP R1.5 VA 1U UPS JPN	AF421A
	HP R1.5 VA 1U UPS NA	AF419A
	HP R/T2200 2-U ERM	AF412A

<b>HP Monitored Power Distribution Unit (PDU)</b>	<b>HP Monitored Power Distribution Unit: Full Rack Version</b>	
	17.3 kVA Monitored PDU Model S2324	AF503A
	8.6 kVA Monitored PDU Model S1324	AF504A
	16.6 kVA Monitored PDU Model S2140	AF505A
	8.3 kVA Monitored PDU Model S1140	AF506A
	22 kVA Monitored PDU Model S2316	AF507A
	11 kVA Monitored PDU Model S1316	AF508A
	14.7 kVA Monitored PDU Model S2132	AF509A
	7.3 kVA Monitored PDU Model S1132	AF510A
	4.9kVA Monitored PDU model S124	AF514A
7.3kVA Monitored PDU model S132	AF515A	

<b>USB Options</b>	HP USB 2-Button Optical Scroll Mouse (Carbonite/Silver)	DC172B
	1.44MB External USB Floppy Drive	DC141B
	HP USB 04 Standard Keyboard	DT528A#ABA
	HP 1GB USB 2.0 Floppy Drive Key	442085-B21
	HP 256MB USB 2.0 Floppy Drive Key	442084-B21

<b>HP Rack 5000 Series (Graphite Metallic)</b>	HP 5642 Rack-Unassembled	358254-B21
<b>NOTE:</b> Please see the <a href="http://h18000.www1.hp.com/products/quickspecs/12074_div/12074_div.html">HP Rack 5642 QuickSpecs</a> for additional part numbers and Technical Specifications such as height, width, depth, weight, and color: <a href="http://h18000.www1.hp.com/products/quickspecs/12074_div/12074_div.html">http://h18000.www1.hp.com/products/quickspecs/12074_div/12074_div.html</a> (Worldwide)		
<b>NOTE:</b> For additional information regarding Rack Cabinets, please see the following URL: <a href="http://www.hp.com/go/rackandpower">http://www.hp.com/go/rackandpower</a> .		

<b>HP Rack 10000 G2 Series (Carbon/Graphite Metallic)</b>	10642 G2 (42U) Rack Cabinet - Pallet	AF001A
	10642 G2 (42U) Rack Cabinet - Shock Pallet	AF002A
	10642 G2 (42U) Rack Cabinet - Crated	AF003A
	10642 G2 (42U) Rack Cabinet, with Extension - Shock Pallet	AF004A
	10636 G2 (36U) Rack Cabinet - Pallet	AF011A
	10636 G2 (36U) Rack Cabinet - Shock Pallet	AF012A
	10636 G2 (36U) Rack Cabinet - Crated	AF013A
	10636 G2 (36U) Rack Cabinet, with Extension - Shock Pallet	AF014A
	10622 G2 (22U) Rack Cabinet - Pallet	AF021A
	10622 G2 (22U) Rack Cabinet - Shock Pallet	AF022A
	10842 G2 (42U) 800mm Wide Rack Cabinet - Pallet	AF041A
	10842 G2 (42U) 800mm Wide Rack Cabinet - Shock Pallet	AF042A
	10647 G2 (47U) Rack Cabinet - Pallet	AF031A

**NOTE:** It is mandatory to use a shock pallet when shipping racks with equipment installed.

**NOTE:** Please see the [Rack 10000 G2 QuickSpecs](http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.html) for Technical Specifications such as height, width, depth, weight, and color:

[http://h18000.www1.hp.com/products/quickspecs/12402\\_div/12402\\_div.html](http://h18000.www1.hp.com/products/quickspecs/12402_div/12402_div.html) (Worldwide)

**NOTE:** For additional information regarding Rack Cabinets, please see the following URL: <http://www.hp.com/go/rackandpower>.



<b>HP Rack 10000 Series</b> (Graphite Metallic)	<p>HP S10614 (14U) Rack Cabinet - Shock Pallet</p> <p><b>NOTE:</b> xxxxxx-B22 (shock pallet) used to ship racks with equipment installed (by custom systems, VARs and Channels).</p> <p><b>NOTE:</b> It is mandatory to use a shock pallet in order to ship racks with equipment installed. Not all Compaq equipment is qualified to be shipped in the Rack 10000 series.</p> <p><b>NOTE:</b> Please see the Rack 10000 QuickSpecs for Technical Specifications such as height, width, depth, weight, and color:  <a href="http://h18000.www1.hp.com/products/quickspecs/10995_div/10995_div.html">http://h18000.www1.hp.com/products/quickspecs/10995_div/10995_div.html</a>  (Worldwide)</p> <p><b>NOTE:</b> For additional information regarding Rack Cabinets, please see the following URL: <a href="http://www.hp.com/go/rackandpower">http://www.hp.com/go/rackandpower</a>.</p>	292302-B22
--	---	------------

---

<b>Keyboards and Monitors</b>	<p>TFT7210R Rack Mounted 17" Monitor</p> <p>TFT7600 Rackmount Keyboard Monitor US</p> <p>TFT7600 Rackmount Keyboard Monitor UK</p> <p>TFT7600 Rackmount Keyboard Monitor GR</p> <p>TFT7600 Rackmount Keyboard Monitor FR</p> <p>TFT7600 Rackmount Keyboard Monitor IT</p> <p>TFT7600 Rackmount Keyboard Monitor SP</p> <p>TFT7600 Rackmount Keyboard Monitor DEN</p> <p>TFT7600 Rackmount Keyboard Monitor NOR</p> <p>TFT7600 Rackmount Keyboard Monitor SE/FI</p> <p>TFT7600 Rackmount Keyboard Monitor SWI</p> <p>TFT7600 Rackmount Keyboard Monitor PORT</p> <p>TFT7600 Rackmount Keyboard Monitor BEL</p> <p>TFT7600 Rackmount Keyboard Monitor JPN2</p> <p>TFT7600 Rackmount Keyboard Monitor RUS</p> <p>TFT7600 Rackmount Keyboard Monitor INTL</p> <p>1U Rackmount Keyboard with USB, US</p> <p>1U Rackmount Keyboard with USB, UK</p> <p>1U Rackmount Keyboard with USB, GR</p> <p>1U Rackmount Keyboard with USB, FR</p> <p>1U Rackmount Keyboard with USB, ITL</p> <p>1U Rackmount Keyboard with USB, SP</p> <p>1U Rackmount Keyboard with USB, DEN</p> <p>1U Rackmount Keyboard with USB, NOR</p> <p>1U Rackmount Keyboard with USB, SE/FI</p> <p>1U Rackmount Keyboard with USB, SWI</p> <p>1U Rackmount Keyboard with USB, PORT</p> <p>1U Rackmount Keyboard with USB, BEL</p> <p>1U Rackmount Keyboard with USB, JPN2</p> <p>1U Rackmount Keyboard with USB, RUS</p> <p>1U Rackmount Keyboard with USB, INTL</p> <p><b>NOTE:</b> For additional information regarding Rack Options, please see the following URL: <a href="http://www.hp.com/go/rackandpower">http://www.hp.com/go/rackandpower</a>.</p>	<p>348373-B21</p> <p>AG052A</p> <p>AG053A</p> <p>AG054A</p> <p>AG055A</p> <p>AG056A</p> <p>AG057A</p> <p>AG058A</p> <p>AG059A</p> <p>AG060A</p> <p>AG061A</p> <p>AG062A</p> <p>AG063A</p> <p>AG064A</p> <p>AG065A</p> <p>AG066A</p> <p>AG072A</p> <p>AG073A</p> <p>AG074A</p> <p>AG075A</p> <p>AG076A</p> <p>AG077A</p> <p>AG078A</p> <p>AG079A</p> <p>AG080A</p> <p>AG081A</p> <p>AG082A</p> <p>AG083A</p> <p>AG084A</p> <p>AG085A</p> <p>AG086A</p>
-------------------------------	--	---

---

<b>HP KVM Switch Options</b>	2x1x16 IP Console Switch with Virtual Media	AF601A
	4x1x16 IP Console Switch with Virtual Media	AF602A
	2x16 Server Console Switch with Virtual Media	AF600A
	PS/2 Virtual Media Interface Adapter, 1 pack	AF604A
	<b>NOTE: Requires PS/2 and one USB port on server.</b>	
	Server Console Switch (KVM), 0 x 1 x 8 port	336044-B21
	Server Console Switch (KVM), 0 x 2 x 16 port	336045-B21
	PS/2 Interface Adapter, 1 pack	262588-B21
	PS/2 Interface Adapter, 8 pack	262587-B21
	USB Interface Adapter, 1 pack	336047-B21
	Serial Interface adapter - 1 Pack with power supply	373035-B21
	<b>NOTE: Cat5e cables are required to connect Interface Adapters to Console Switches. Cat5e cables can be found at the following URL:</b>	
	<a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a> .	
	HP 1x4 Console Switch	AF611A
HP PS2 Server Console Cable, 6 foot, 2-Pack	AF612A	
HP USB Server Console Cable, 6 foot, 2-Pack	AF613A	
<b>NOTE: Required for supporting USB peripherals.</b>		
<b>NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a>.</b>		

---

<b>HP Serial Console Server Options</b>	HP 16 Port Serial Console Server (worldwide)	AF101A
	HP 48 Port Serial Console Server (worldwide)	AF102A
	Serial Adapter, RJ45-DB9 DCE Female, 1 Pack	AF103A
	Serial Adapter, RJ45-DB9 DCE Female, 8 Pack	AF110A
	<b>NOTE: Cat5e cables are required to connect Serial Adapters to Serial Console Servers. Additional Serial Adapters and Cat5e cables can be found at the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a>.</b>	
<b>NOTE: For additional information regarding KVM switches, Serial Console servers, rack mount monitors, keyboards and all related options please see the following URL: <a href="http://www.hp.com/go/kvm">http://www.hp.com/go/kvm</a>.</b>		

---

<b>Service and Support Offerings</b> (HP Care Pack Services)	<b>Hardware Services On-site Service</b>	
	4-Hour On-site Service, 5-Day x 13-Hour Coverage, 3 Years, Electronic	U4544E
	4-Hour On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	U4545E
	<b>Hardware Services 6-Hour Call to Repair On-site Service</b>	
	6-Hour Call to Repair, On-site Service, 7-Day x 24-Hour Coverage, 3 Years, Electronic	U4546E
	<b>Installation &amp; Start-up Services</b>	
	Hardware Installation, Electronic	U4554E
	Installation & Start-Up of a ProLiant server and Microsoft or Linux O/S per the Customer Description and/or Data Sheet. To be delivered on a scheduled basis 8am-5pm, M-F, excl. HP holidays, Electronic	U4555E
	Installation and Startup for Essentials Rapid Deployment Pack, Electronic	U5683E
	<b>Support Plus</b>	
	Onsite HW support, 8am-9pm, M-F, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 8am-9pm, M-F 2hr response time excl. HP holidays, Electronic	U4556E
	<b>Support Plus 24</b>	
Onsite HW support 24x7, 4hr response and Microsoft O/S SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic	U4557E	
Onsite HW support 24x7, 4hr response and SuSE Linux SW Tech support offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays, Electronic	U6312E	



Onsite HW support 24x7, 4hr response and Red Hat ES Linux SW Tech support  
offsite, onsite at HP's discretion, 24x7 2hr response time incl. HP holidays,  
Electronic

U8334E

**NOTE:** For more information, customer/resellers can contact:

<http://www.hp.com/services/carepack>

**NOTE:** Memory configurations listed do not apply to "Factory Integrated Models".

**Standard Memory**

2 GB PC2-5300 Fully Buffered DIMMs (DDR2-667) (2 x 1 GB)

**Upgrading Memory and Memory Interleaving**

When upgrading memory, DIMMs 1A and 2A must match. DIMMs 3B and 4B, DIMMs 5C and 6C, and DIMMs 7D and 8D must match and must be installed as a pair. When DIMMs 1A and 2A are populated the system is automatically configured for 2:1 interleaving. When all 4 banks are populated the system is automatically configured for 4:1 interleaving. When four, six, or eight DIMMs are populated with identical DIMMs the system is automatically configured for bank interleaving.

**Standard Memory Plus Optional Memory**

Up to 26 GB memory is available with the standard memory and the optional installation of PC2-5300 Fully Buffered DIMMs (DDR2-667) memory kits.

**Standard Memory Replaced with Optional Memory**

Up to 32 GB of memory is available with the removal of the standard memory and the optional installation of PC2-5300 Fully Buffered DIMMs (DDR2-667) memory kits.

**NOTE:** Chart does not represent all possible configurations.

Memory		Slot							
		1	2	3	4	5	6	7	8
<b>Standard</b>	<b>2 GB</b>	<b>1 GB</b>	<b>1 GB</b>	<b>Empty</b>	<b>Empty</b>	<b>Empty</b>	<b>Empty</b>	<b>Empty</b>	<b>Empty</b>
<b>Optional</b>	<b>26 GB</b>	<b>1 GB</b>	<b>1 GB</b>	<b>4 GB</b>	<b>4 GB</b>	<b>4 GB</b>	<b>4 GB</b>	<b>4 GB</b>	<b>4 GB</b>
<b>Maximum</b>	<b>32 GB</b>	<b>4 GB</b>	<b>4 GB</b>	<b>4 GB</b>	<b>4 GB</b>	<b>4 GB</b>	<b>4 GB</b>	<b>4 GB</b>	<b>4 GB</b>

**NOTE:** In the online spare configuration, the ROM automatically configures the last populated bank as the spare memory. If only banks A and B are populated, bank B is the spare bank. If banks A, B, and C are populated, bank C is the spare bank. Online spare memory is configured through RBSU.

**NOTE:** Mirrored Memory uses mirrored banks to provide a high level of memory redundancy. Customer chooses to implement or not: User selectable via BIOS and default is off.

Following are memory options available from HP:

1 GB FBD PC2-5300 2 x 512 MB Kit	397409-B21
2 GB FBD PC2-5300 2 x 1 GB Kit	397411-B21
2 GB FBD PC2-5300 2 x 1 GB LP Kit	461826-B21
4 GB FBD PC2-5300 2 x 2 GB Kit	397413-B21
4 GB FBD PC2-5300 2 x 2 GB LP Kit	461828-B21
8 GB FBD PC2-5300 2 x 4 GB Kit	397415-B21
8 GB FBD PC2-5300 2 x 4 GB LP Kit	466440-B21

**NOTE:** Memory Option Kits described as LP include Low Power DIMMs. For more information on ProLiant Energy Efficient Features, please visit: <http://h18004.www1.hp.com/products/servers/platforms/energyefficient/>

In Advanced ECC mode, FBDIMMs must be populated as specified in the following table:

Configuration	Bank A 1A and 3A	Bank B 5B and 7B	Bank C 2C and 4C	Bank D 6D and 8D
1	X	-	-	-
2	X	X	-	-
3	X	X	X	-
4	X	X	X	X

## Online spare memory configuration

Online spare FBDIMM configuration requirements (in addition to general configuration requirements):

- When only bank A is being used, it must be fully populated with dual-rank FBDIMMs.
- If banks A and C are being used, they must be fully populated.
- If installed, bank A and bank C must contain FBDIMMs with identical part numbers.
- If installed, bank B and bank D must also contain FBDIMMs with identical part numbers.

In online spare mode, FBDIMMs must be populated as specified in the following table:

Configuration	Branch 0 Bank A 1A and 3A	Branch 0 Bank C 2C and 4C	Branch 1 Bank B 5B and 7B	Branch 1 Bank D 6D and 8D
1*	X	-	-	-
2	X	X	-	-
3	X	X	X	X

\* Configuration 1 is only supported if using bank A, populated with dual-rank FBDIMMs. All FBDIMMs 1GB and above are dual-rank.

After installing FBDIMMs, use RBSU to configure the system for online spare memory support ("Configuring online spare memory" on page 57).

## Mirrored memory configuration


Mirrored memory FBDIMM configuration requirements (in addition to general configuration requirements):

- Banks A and B must be fully populated.
- Bank A and bank B must contain FBDIMMs with identical part numbers. If installed, bank C and bank D must also contain FBDIMMs with identical part numbers.

When using mirrored memory mode, FBDIMMs must be populated as specified in the following table:

Configuration	Bank A 1A and 3A	Bank B 5B and 7B	Bank C 2C and 4C	Bank D 6D and 8D
1	X	X	-	-
2	X	X	X	X

**NOTE:** After installing FBDIMMs, use RBSU to configure the system for mirrored memory support ("Configuring mirrored memory" on page 57).

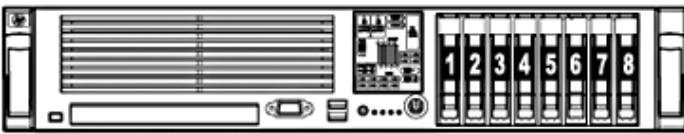

## Drive Support

	Quantity Supported	Position Supported	Controller
<b>Removable Media</b>			
1.44-MB Diskette Drive	Only 1 available removable media bay	Slimline bay	Integrated diskette <b>NOTE: Optional</b>
Slimline CD-RW/DVD-ROM Combo Option Kit <b>NOTE: Included in performance models.</b>	Only 1 available removable media bay	Slimline bay	Integrated IDE <b>NOTE: Optional</b>
Slimline DVD-ROM Drive (8x/24x) Option Kit	Only 1 available removable media bay	Slimline bay	Integrated IDE <b>NOTE: Optional</b>
HP ProLiant Slim CD-ROM x24	Only 1 available removable media bay	Slimline bay	Integrated IDE <b>NOTE: Optional</b>
HP DVD±R/RW 8X Slim	Only 1 available removable media bay	Slimline bay	Integrated IDE <b>NOTE: Optional</b>

## Hard Drives

### SFF SAS - Hot Plug Drives

	Quantity Supported	Position Supported	Controller
146GB 3G SAS 10K SP	Up to 8	1-8	HP Smart Array E200/64MB Controller
146GB 3G SAS 10K DP			HP Smart Array E200/128 BBWC Controller
72GB 3G SAS 10K SP			HP Smart Array E500 Controller
72GB 3G SAS 10K DP			HP Smart Array P400/256MB Controller
72GB 3G SAS 15K SP			HP Smart Array P400/512MB BBWC Controller
72GB 3G SAS 15K DP			HP Smart Array P600/256 BBWC Controller
36GB 3G SAS 15K SP			<b>NOTE: Optional mixed PCI-X/E required for SA-P600.</b>
36GB 3G SAS 15K DP			HP Smart Array P800/512 BBWC Controller

### SATA - Hot Plug Drives

	Quantity Supported	Position Supported	Controller
120GB 1.5G SATA 5.4K	Up to 8	1-8	HP Smart Array E200/64MB Controller
60GB 1.5G SATA 5.4K			HP Smart Array E200/128 BBWC Controller
			HP Smart Array E500 Controller
			HP Smart Array P400/256MB Controller
			HP Smart Array P400/512MB BBWC Controller
			HP Smart Array P600/256 BBWC Controller
	<b>NOTE: Optional mixed PCI-X/E required for SA-P600.</b>		
	HP Smart Array P800/512 BBWC Controller		

## External Storage

	Quantity Supported	Position Supported	Host Controller or Adapter
Modular Smart Array 20 Family	1 per SCSI VHDCI connector	External	Smart Array 6402/128 Controller Smart Array 6404/256 Controller <b>NOTE:</b> Optional mixed PCI-X/E cage required.
Modular Smart Array 30 Family	Up to 4 Up to 2 Up to 4	External	Smart Array E500/256MB Controller HP Smart Array P600/256 BBWC Controller HP Smart Array P800/512 BBWC Controller
Modular Smart Array 50 Enclosure	2 per connector (supports 1+1 cascading)	External	HP Smart Array P600/256 BBWC Controller <b>NOTE:</b> Optional mixed PCI-X/E cage required.
Modular Smart Array 60 Enclosure	Up to 8 Up to 4 Up to 8	External	Smart Array E500/256MB Controller HP Smart Array P600/256 BBWC Controller HP Smart Array P800/512 BBWC Controller
Modular Smart Array 70 Enclosure	Up to 4 Up to 2 Up to 4	External	Smart Array E500/256MB Controller HP Smart Array P600/256 BBWC Controller HP Smart Array P800/512 BBWC Controller
Modular Smart Array 500 G2	1 per SCSI	External	Please see the Modular Smart Array 500 G2 QuickSpecs for the latest list of supported HBAs: <a href="http://h18000.www1.hp.com/products/quickspecs/12245_div/12245_div.html">http://h18000.www1.hp.com/products/quickspecs/12245_div/12245_div.html</a>
Modular Smart Array 1000	Please see the QuickSpecs to determine configuration requirements	External	Please see the Modular Smart Array 1000 QuickSpecs for the latest list of supported HBAs: <a href="http://hp.com/go/msa1000">http://hp.com/go/msa1000</a>
Modular Smart Array 1500 cs	Please see the QuickSpecs to determine configuration requirements	External	Please see the Modular Smart Array 1500 cs QuickSpecs for the latest list of supported HBAs: <a href="http://www.hp.com/go/MSA1500cs">http://www.hp.com/go/MSA1500cs</a>

---

### Maximum Storage Capacity - (with MSA50)

Internal	1.168TB (8 x 146GB SAS SFF)
External	2.920TB (20 x 146GB SAS SFF)
Total	4.088TB

---

### Tape Drives, Tape Autoloaders, Tape Libraries & D2D Backup

**NOTE:** For an up-to-date listing of the latest O/S Support details for each of the Tape Drives listed below, please see the following:

<http://h18000.www1.hp.com/products/quickspecs/division/10233.html> (Worldwide)

**NOTE:** For an up-to-date listing of the latest O/S Support details for each of the Tape Autoloaders and Tape Libraries listed below, please see the following:

<http://h18000.www1.hp.com/products/quickspecs/division/10809.html> (Worldwide)

**NOTE:** For complete listing of tape drive offerings see:

<http://www.hp.com/products1/storage/compatibility/tapebackup/ISS/index.html>

**NOTE:** SAS Tape Drives: Connecting hard drive cage and SAS tape to the same SAS Controller using split cable (supplied with tape drive) deactivates 1 of the hard drive bays. Actual hard drive bay deactivated depends on where split cable plugs into SAS drive connector. Example: 3x SAS cable connector plugged into SAS drive connector (5-8) on the back of the hard drive cage would mean drive bay 8 is deactivated.

	Position Supported	Controller	Part Number
HP StorageWorks SCSI Tape Drives, External	External	HP SC11Xe Host Bus Adapter	412911-B21



LTO-1 Ultrium 232  
 LTO-2 Ultrium 448  
 LTO-2 Ultrium 460  
 LTO-3 Ultrium 960  
 LTO-3 Ultrium 920  
 LTO-4 Ultrium 1840  
 DAT 40  
 DAT 72  
 DAT 160  
 DLT VS160  
 SDLT 600  
 1U Rack-Mount Kit  
 3U Rack-Mount Kit

**HP StorageWorks  
 USB Tape Drives,  
 External** External USB 2.0 Port N/A

DAT 40 USB  
 DAT 72 USB  
 DAT 160 USB  
 1U Rack-Mount Kit

**HP StorageWorks  
 SAS Tape Drives,  
 External** External HP SC44Ge Host Bus Adapter 416096-B21  
**NOTE: Recommended.**

DAT 160 SAS  
 LTO-2 Ultrium 448  
 SAS  
 LTO-3 Ultrium 920  
 SAS  
 LTO-4 Ultrium 1760  
 SAS  
 LTO-4 Ultrium 1840  
 SAS  
 1U Rack-Mount Kit

HP Smart Array P400/256MB Controller 405132-B21

HP Smart Array P400/512MB Controller 411064-B21

**NOTE: Please visit: <http://www.hp.com/go/connect> for details about minimum SAS controller firmware version and SAS cabling requirements.**

**HP StorageWorks  
 SCSI Tape  
 Automation,  
 External** External HP SC11Xe Host Bus Adapter 412911-B21

DAT 72x10  
 Autoloader 1/8 G2  
 Autoloader  
 MSL2024  
 MSL4048  
 MSL8096  
 MSL6000

HP U320e SCSI Host Bus Adapter AH627A  
**NOTE: Only valid for MSL tape libraries.**

**HP StorageWorks  
 SAS Tape  
 Automation,  
 External** External HP SC44Ge Host Bus Adapter 416096-B21

1/8 G2 Autoloader  
 MSL2024  
 MSL4048  
 MSL8096

**NOTE: Please visit <http://www.hp.com/go/connect> for details about minimum SAS controller firmware version and SAS cabling requirements.**

**HP StorageWorks  
 Fibre Tape  
 Automation,  
 External** External Please consult the EBS connectivity matrix at <http://www.hp.com/go/ebs> for detailed connectivity information. N/A

MSL2024  
 MSL4048  
 MSL8096



**HP StorageWorks  
D2D Backup  
Systems**

External    Embedded Network Controller

N/A

- D2D110
- D2D120
- D2D130

<b>Power Supply Specification - AC</b>	<b>Part number</b>		380622-001			
	<b>Spare Kit</b>		403781-001			
Operational Input Voltage Range (Vrms)	90 to 264					
Frequency Range (Nominal) (Hz)	47 to 63 (50/60)					
Nominal Input Voltage (Vrms)	<b>100</b>	<b>120</b>	<b>208</b>	<b>220</b>	<b>230</b>	<b>240</b>
Max Rated Output Wattage Rating	800	850	1000	1000	1000	1000
Nominal Input Current (A rms)	10.0	8.8	5.85	5.5	5.2	4.97
Max Rated Input Wattage Rating (Watts)	980	1035	1193	1186	1172	1169
Max. Rated VA (Volt-Amp)	1000	1056	1217	1210	1196	1193
Efficiency (%)	81.5	82	84	84	85	85.5
Power Factor	0.98	0.98	0.98	0.98	0.98	0.98
Leakage Current (mA)	0.44	0.52	0.91	0.96	1.00	1.04
Max. Inrush Current (A peak)	30	30	30	30	30	30
Max. Inrush Current duration (mS)	3	3	3	3	3	3

<b>Power Supply Specification - DC</b>	<b>Part number</b>		433634-B21			
	<b>Spare Kit</b>		419613-001			
Operational Input Voltage Range (Vrms)	-36.0 to -72.0V DC					
Frequency Range (Nominal) (Hz)	DC					
Nominal Input Voltage (Vrms)	<b>36</b>	<b>48</b>	<b>72</b>			
Max Rated Output Wattage Rating	1210	1210	1210			
Nominal Input Current (A rms)	38	29	20			
Max Rated Input Wattage Rating (Watts)	1368	1392	1440			
Efficiency (%)	87.6	87.6	86			
Max. Inrush Current (A peak)	60	60	60			
Max. Inrush Current duration (mS)	100	100	100			

**NOTES:**

- To review typical system power ratings use the Active Answers Power Calculator which is available via the online tool located at url: <http://h30099.www3.hp.com/configurator/calc/Power%20Calculator%20Catalog.xls>

To drill down to calculators:

- Click on: "ProLiant Servers"
- Click on the Server of interest. Example: DL380 G5
- Click on: "Power Calculator" link. (You may need to scroll down to see it)

**System Unit****Dimensions** (H x W x D) 3.38 x 17.54 x 26.01 in (8.59 x 44.54 x 66.07 cm)  
(with bezel)**Weight** (approximate) Maximum 60 lb (27.22 kg)  
(all hard drives, power supply, and processor installed)  
Minimum 47.18 lb (20.41 kg)  
(one hard drive, power supply, and processor installed)**Input Requirements** (per power supply) Rated Line Voltage 100 - 132 VAC,  
200 - 240 VAC  
Rated Input Current 10A (at 100 VAC)  
9A (at 120 VAC)  
6.1A (at 200 VAC)  
Rated Input Frequency 50 to 60 Hz  
Rated Input Power 980W (at 100 VAC)  
1035W (at 120 VAC)  
1170W (at 240 VAC)**BTU Rating** Maximum 3350 BTU/hr (at 100 VAC)  
3530 BTU/hr (at 120 VAC)  
3990 BTU/hr (at 240 VAC)**Power Specifications** To review typical system power ratings use the Power Calculator which is available via the online tool located at URL:  
<http://h30099.www3.hp.com/configurator/calc/Power%20Calculator%20Catalog.xls>

- Click on the system of interest. Example: DL380 G5
- Follow the instructions of the next screens.

**Power Supply Output Power** (per power supply) Rated Steady-State Power 800 W (at 100 VAC)  
850 W (at 120 VAC)  
1000W (qt 200-240 VAC)  
Maximum Peak Power 800 W (at 100 VAC)  
850 W (at 120 VAC)  
1000W (at 200-240 VAC)**System Inlet Temperature** Operating 10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18°F/hr). The upper limit may be limited by the type and number of options installed.  
System performance may be reduced if operating with a fan fault or above 30°C (86°F).

Non-operating -30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).

**Relative Humidity** (non-condensing) Operating 10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.

Non-operating 5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.

**Altitude** Operating 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

Non-operating 9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).

**Acoustic Noise**

Listed are the declared A-Weighted sound power levels (LWAd) and declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109).

**Idle**

LWAd	6.1 B
LpAm	44 dBA

**Operating**

LWAd	6.1 B
LpAm	44 dBA

**Smart Array P400 Controller**

<b>Disk Drive and Enclosure Interface</b>	3G SAS (Serial Attached SCSI) 1.5G SATA (Serial Advanced Technology Attachment)
<b>SAS Connectors</b>	2 internal (SFF8484) x4 wide port connectors
<b>Cache Memory Speed</b>	DDR2-533MHz with 40 or 72-bit wide bus provides up to 4.2 GB/s maximum bandwidth.
<b>Server Interface</b>	x8 2.5G PCIe provides 2GB/s maximum bandwidth.
<b>SAS Speed</b>	x8 3G SAS provides 2.4GB/s maximum bandwidth.
<b>Cache Memory</b>	40-bit 256MB cache (72-bit 512MB module upgrades available); ECC protection, battery-backed, and transportable
<b>Logical Drives Supported</b>	Up to 32 logical drives
<b>Host Memory Addressing</b>	64-bit, supporting greater than 4GB server memory space
<b>RAID Support</b>	RAID 6 with ADG (Advanced Data Guarding) requires Battery Backed Write Cache Upgrade RAID 5 (Distributed Data Guarding) RAID 1+0 (Striping & Mirroring) RAID 0 (Striping)

**Smart Array E200 Controller**

<b>Disk Drive and Enclosure Interface</b>	3G SAS (Serial Attached SCSI) 1.5G SATA (Serial Advanced Technology Attachment)
<b>SAS Connectors</b>	2 internal (SFF8484) x4 wide port connectors
<b>Cache Memory Speed</b>	DDR1-266 MHz provides up to 4.2 GB/s maximum bandwidth.
<b>Server Interface</b>	x8 2.5G PCIe provides 2GB/s maximum bandwidth.
<b>SAS Speed</b>	x8 3G SAS provides 2.4GB/s maximum bandwidth.
<b>Cache Memory</b>	40-bit 64MB cache or a 128MB battery backed cache: ECC protection, battery-backed, and transportable
<b>Logical Volumes Supported</b>	Up to 32 logical volumes
<b>Maximum Volume Capacity</b>	3TB (6 x 500 GB)
<b>Host Memory Addressing</b>	64-bit, supporting greater than 4GB server memory space
<b>RAID Support</b>	RAID 5 (Distributed Data Guarding) RAID 1, 1+0 (Striping & Mirroring) RAID 0 (Striping)

<b>Two Embedded NC373i Multifunction Server Adapters</b>	<b>Network Interface</b>	10Base-T/100Base-TX/1000Base-TX		
	<b>Compatibility</b>	IEEE 802.3 10Base-T		
		IEEE 802.3ab 1000Base-T		
		IEEE 802.3u 100Base-TX		
	<b>Data Transfer Method</b>	PCI Express, four lanes (x4)		
	<b>Network Transfer Rate</b>	10Base-T (Half-Duplex)	10 Mb/s	
		10Base-T (Full-Duplex)	20 Mb/s	
		100Base-TX (Half-Duplex)	100 Mb/s	
		100Base-TX (Full-Duplex)	200 Mb/s	
		1000Base-TX (Half and Full-Duplex)	2000Mb/s	
<b>Connector</b>	Two RJ-45			
<b>Cable Support</b>	10Base-T	Categories 3, 4 or 5 UTP; up to 328 ft (100 m)		
	100Base-TX	Category 5 or higher UTP; up to 328 ft (100 m)		
	1000BaseTX	Category 5 or higher UTP; up to 328 ft (100 m)		

<b>Environment-friendly Products and Approach</b>	<b>End-of-life Management and Recycling</b>	<p>Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a>. To recycle your product, please go to: <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p> <p>The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <a href="http://www.hp.com/go/green">http://www.hp.com/go/green</a>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.</p>
---	---	---

© Copyright 2008 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation.

Intel, the Intel logo, Xeon and Xeon Inside are trademarks of Intel Corporation in the U.S. and other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.