

# Quick Installation Guide

# McTiVia

Wirelessly brings EVERYTHING on your Mac to TV



## 1. Package Contents

Please check the following items are included in your **MctiVia** package:

- **MctiVia** Windows®/Mac® device
- Quick Installation Guide
- 2 WiFi antennae
- Universal power adaptor
- Installation CD
- User's Manual (on CD)
- Warranty Card



## 2. Before you start

**McTiVia** is the first device that can show all content of your Windows® as well as Mac® computers on your TV wirelessly. You can easily control up to 8 computers with your mouse and/or keyboard. You can share any content from your computers with your friends and family in your living room.

### Four Setup Possibilities:

#### a) Ethernet: Best performance

Whenever possible, always use Ethernet cables to connect **McTiVia** device to your home network. This setup provides best performance for both remote operation and internet connection.



#### b) Use power-line modems: Good performance

If Ethernet cable is not available net to your TV, you may consider to buy a pair of power-line modems to setup a wired connection from your home network to **McTiVia**.



**c) Partly wireless: Reasonable Performance**

If wireless connection is preferred, you can connect your home AP and **McTiVia** via cables, and access either from your home AP or **McTiVia**.



**d) Purely wireless: Basic performance**

You can also try setting up **McTiVia** as a wireless client to your home AP via AP-Client mode. However, this setup is more complicated and vulnerable to any interference in WiFi signal.



### 3. Quick Start


1. Connect the HDMI output on the **McTiVia** device to your TV, and turn on your TV.
2. Connect the power adaptor to your **McTiVia**, and plug in to your power outlet.
3. Press the Power button on **McTiVia** to turn on the device.
4. **McTiVia** will be powered ON. The Main Menu as below will be shown on your TV screen while system is ready.



5. Insert **McTiVia** CD and follow on-screen instructions to install software from the CD-ROM.
6. Find the following icon in "Applications\McTiVia" folder (on Mac) or "Programs\McTiVia" folder (on Windows) to launch **McTiVia- MirrorOp Sender**.



7. Search WiFi Access Point. Select your **McTiVia** device (default SSID is McTiVia) from the list and click the Connect button.

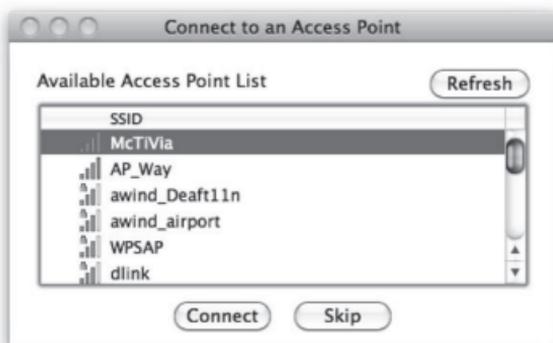

8. Connect to selected access point.
9. Connect to **McTiVia** server. If only one server is found, it will automatically connect to the server.



10. The application will **temporarily** adjust your PC resolution for best projection result, and then project your screen to TV. You should see your PC Desktop on TV screen now.
11. To finish projection, click the Stop button on **McTiVia- MirrorOp Sender**. Your screen resolution would be restored to original one.



12. To begin projection again, click the Play button again.

# Warranty Policy

If the product is damaged or has malfunctions not caused by human error, please consult your product manual first. If you require technical support information, please visit our web site at: <http://www.awindinc.com>

## The warranty does not apply to any of the following

- (1) Damages caused by accident, overloading, misuse, improper use or other types of damage not related to this product quality or design.
- (2) The machine is damaged by unforeseeable natural disasters (flooding, fire hazard, earthquake, typhoon or thunder) or causes due by human error.
- (3) Attempt to open product housing, dismantle, attach other items or retrofit without written permission from Awind.
- (4) Consumables or components.
- (5) Serial number on the product or component has been removed or damaged.
- (6) The product warranty is outdated.
- (7) Claims without presenting a warranty certificate, or if presented but the warranty certificate is not properly marked with the date of purchase, stamped by the authorized agent or the marked information has been tempered with..

## Warranty Services

If any fault has developed during the warranty period, after confirmation by Awind, we will (1) Repair the product directly. (2) Replace with a brand new product or refurbished item. Applicable to all products; when sending the product for services, you need to provide:

- (1) Your name, address and telephone number.
- (2) The original copy of warranty certificate where it must be stamped by the dealer and properly marked with the date of purchase and the correct matching serial number.
- (3) If the warranty certificate has not been stamped by your local dealer, you may present the original bill receipt where is clearly printed with details of the product. If you are unable to provide above information. We will regard the warranty period to start from the date of dispatch from the factory.

## Disclaimer

- We will not be responsible if it's believed the damage is caused by the customer, or other personnel, deliberately or by accident.
- We will not be responsible for any loss caused by continuous use or inability to use the product.
- We will not be responsible for costs due to damage other than repairs to Awind products. Any damage or malfunction caused to other machines linked to Awind products is not cover by this warranty.

# Warranty Card

---

Name:	Product No.
Purchasing Date:	Product Name:
Address:	Serial No.
	Shop:
TEL:	
FAX:	
Email:	